

## GWN78xx Switch Firmware Release Notes

### IMPORTANT UPGRADING NOTE

1. Please be aware: once upgraded the firmware to version 1.0.15.x, downgrade to 1.0.13.x and previous version is not allowed.
2. Combined all GWN78xx switches model firmware release together since 1.0.13.6. For 1.0.9.15 and previous firmware release notes, please visit:  
<https://www.grandstream.com/support/firmware>

## Table of Content

<b>IMPORTANT UPGRADING NOTE .....</b>	<b>1</b>
<b>FIRMWARE FILE DOWNLOAD .....</b>	<b>4</b>
<b>FIRMWARE VERSION 1.0.15.138 .....</b>	<b>5</b>
PRODUCT NAME .....	5
DATE .....	5
FIRMWARE FILE INFORMATION .....	5
CHANGES/ENHANCEMENT.....	5
<b>FIRMWARE VERSION 1.0.15.137 .....</b>	<b>6</b>
PRODUCT NAME .....	6
DATE .....	6
FIRMWARE FILE INFORMATION .....	6
CHANGES/ENHANCEMENT.....	6
<b>FIRMWARE VERSION 1.0.15.135 .....</b>	<b>7</b>
PRODUCT NAME .....	7
DATE .....	7
FIRMWARE FILE INFORMATION .....	7
CHANGES/ENHANCEMENT.....	7
<b>FIRMWARE VERSION 1.0.15.132 .....</b>	<b>8</b>
PRODUCT NAME .....	8
DATE .....	8
FIRMWARE FILE INFORMATION .....	8
CHANGES/ENHANCEMENT.....	8
<b>FIRMWARE VERSION 1.0.15.126 .....</b>	<b>9</b>
PRODUCT NAME .....	9
DATE .....	9
FIRMWARE FILE INFORMATION .....	9
CHANGES/ENHANCEMENT.....	9
NEW FEATURE OVERVIEW.....	10
<b>FIRMWARE VERSION 1.0.13.18 .....</b>	<b>11</b>
PRODUCT NAME .....	11
DATE .....	11

FIRMWARE FILE INFORMATION .....	11
CHANGES/ENHANCEMENT.....	11
<b>[11/20/2024] FIRMWARE VERSION 1.0.13.6.....</b>	<b>12</b>
PRODUCT NAME .....	12
DATE .....	12
FIRMWARE FILE INFORMATION .....	12
<b>FIRMWARE VERSION 1.0.13.6 .....</b>	<b>13</b>
PRODUCT NAME .....	13
DATE .....	13
FIRMWARE FILE INFORMATION .....	13
CHANGES/ENHANCEMENT.....	13
NEW FEATURE OVERVIEW .....	14

## FIRMWARE FILE DOWNLOAD

Individual firmware files are available for downloading at URL below:

<https://www.grandstream.com/support/firmware>

## **FIRMWARE VERSION 1.0.15.138**

### **PRODUCT NAME**

GWN7801(P), GWN7802(P), GWN7803(P)

### **DATE**

02/13/2026

### **FIRMWARE FILE INFORMATION**

- GWN7801(P) / 7802(P) / 7803(P) Firmware file name: gwn780xfw.bin  
MD5 checksum: 3eaaf9653ac79ccb232f9eb49551426b

### **CHANGES/ENHANCEMENT**

- Fixed internal bugs.

## FIRMWARE VERSION 1.0.15.137

### PRODUCT NAME

GWN7801(P), GWN7802(P), GWN7803(P), GWN7806(P)  
GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P)  
GWN7821P, GWN7822P  
GWN7830, GWN7831, GWN7832

### DATE

02/04/2025

### FIRMWARE FILE INFORMATION

- GWN7801(P) / 7802(P) / 7803(P) Firmware file name: gwn780xfw.bin  
MD5 checksum: adfaad17003927adf946225b0182d159
- GWN7806(P) Firmware file name: gwn7806fw.bin  
MD5 checksum: 66171bd1ae7a9bb7d3a1c8393f0cc47a
- GWN7811(P) / 7812P / 7813(P) Firmware file name: gwn781xfw.bin  
MD5 checksum: 8d5a82271253b975683fca88af7229a2
- GWN7816(P) Firmware file name: gwn7816fw.bin  
MD5 checksum: 66171bd1ae7a9bb7d3a1c8393f0cc47a
- GWN7821P Firmware file name: gwn7821fw.bin  
MD5 checksum: 8d5a82271253b975683fca88af7229a2
- GWN7822P Firmware file name: gwn7822fw.bin  
MD5 checksum: 8d5a82271253b975683fca88af7229a2
- GWN7830 Firmware file name: gwn7830fw.bin  
MD5 checksum: 8d5a82271253b975683fca88af7229a2
- GWN7831 Firmware file name: gwn7831fw.bin  
MD5 checksum: 8d5a82271253b975683fca88af7229a2
- GWN7832 Firmware file name: gwn7832fw.bin  
MD5 checksum: 66171bd1ae7a9bb7d3a1c8393f0cc47a

### CHANGES/ENHANCEMENT

- Added support to login the device via GDMS without password.
- Fixed internal bugs.

## FIRMWARE VERSION 1.0.15.135

### PRODUCT NAME

GWN7801(P), GWN7802(P), GWN7803(P), GWN7806(P)  
GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P)  
GWN7821P, GWN7822P  
GWN7830, GWN7831, GWN7832

### DATE

12/29/2025

### FIRMWARE FILE INFORMATION

- GWN7801(P) / 7802(P) / 7803(P) Firmware file name: gwn780xfw.bin  
MD5 checksum: 173b0c9d7470388a32ec4c2c1e6b71a1
- GWN7806(P) Firmware file name: gwn7806fw.bin  
MD5 checksum: 5132b15d4c6e2145e7ef77f5598651a1
- GWN7811(P) / 7812P / 7813(P) Firmware file name: gwn781xfw.bin  
MD5 checksum: bd2b8520d00da4941c02d6b99e43467b
- GWN7816(P) Firmware file name: gwn7816fw.bin  
MD5 checksum: 5132b15d4c6e2145e7ef77f5598651a1
- GWN7821P Firmware file name: gwn7821fw.bin  
MD5 checksum: bd2b8520d00da4941c02d6b99e43467b
- GWN7822P Firmware file name: gwn7822fw.bin  
MD5 checksum: bd2b8520d00da4941c02d6b99e43467b
- GWN7830 Firmware file name: gwn7830fw.bin  
MD5 checksum: bd2b8520d00da4941c02d6b99e43467b
- GWN7831 Firmware file name: gwn7831fw.bin  
MD5 checksum: bd2b8520d00da4941c02d6b99e43467b
- GWN7832 Firmware file name: gwn7832fw.bin  
MD5 checksum: 5132b15d4c6e2145e7ef77f5598651a1

### CHANGES/ENHANCEMENT

- Fixed issue that after the primary device reboots independently, the network connectivity to downstream devices connected via LAG ports is lost
- Switch not appearing online on GDMS after upgrade to 1.0.15.126
- Fixed internal bugs.

## FIRMWARE VERSION 1.0.15.132

### PRODUCT NAME

GWN7801(P), GWN7802(P), GWN7803(P), GWN7806(P)  
GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P)  
GWN7821P, GWN7822P  
GWN7830, GWN7831, GWN7832

### DATE

9/29/2025

### FIRMWARE FILE INFORMATION

- GWN7801(P) / 7802(P) / 7803(P) Firmware file name: gwn780xfw.bin  
MD5 checksum: bbe1781bb2003240a4c17721fd7863f0
- GWN7806(P) Firmware file name: gwn7806fw.bin  
MD5 checksum: a27f8bbdad1ecfe207bbf96b5889019b
- GWN7811(P) / 7812P / 7813(P) Firmware file name: gwn781xfw.bin  
MD5 checksum: 154866f7c0d238ef511c951fc6504e11
- GWN7816(P) Firmware file name: gwn7816fw.bin  
MD5 checksum: a27f8bbdad1ecfe207bbf96b5889019b
- GWN7821P Firmware file name: gwn7821fw.bin  
MD5 checksum: 154866f7c0d238ef511c951fc6504e11
- GWN7822P Firmware file name: gwn7822fw.bin  
MD5 checksum: 154866f7c0d238ef511c951fc6504e11
- GWN7830 Firmware file name: gwn7830fw.bin  
MD5 checksum: 154866f7c0d238ef511c951fc6504e11
- GWN7831 Firmware file name: gwn7831fw.bin  
MD5 checksum: 154866f7c0d238ef511c951fc6504e11
- GWN7832 Firmware file name: gwn7832fw.bin  
MD5 checksum: a27f8bbdad1ecfe207bbf96b5889019b

### CHANGES/ENHANCEMENT

- Added support for ignoring credentials during SSH authentication.
- Added key for “encrypted” field to configuration files for Radius and TACACS+.
- Fixed issue where MAC addresses on stack slave devices were not synchronized to the CLI after restart.
- Fixed issue causing abnormal error messages during reboot or role switching in stacking environments.
- Fixed issue where entering the stacking port view displayed an error prompt.
- Fixed internal bugs.

## FIRMWARE VERSION 1.0.15.126

### PRODUCT NAME

GWN7801(P), GWN7802(P), GWN7803(P), GWN7806(P)  
GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P)  
GWN7821P, GWN7822P  
GWN7830, GWN7831, GWN7832

### DATE

6/30/2025

### FIRMWARE FILE INFORMATION

- GWN7801(P) / 7802(P) / 7803(P) Firmware file name: gwn780xfw.bin  
MD5 checksum: f84421315919f78abc2db904db18f2e4
- GWN7806(P) Firmware file name: gwn7806fw.bin  
MD5 checksum: f9030fbd081525c6e508abb79a1a1b4d
- GWN7811(P) / 7812P / 7813(P) Firmware file name: gwn781xfw.bin  
MD5 checksum: b7bdd755b678377e197a9556692bd2e2
- GWN7816(P) Firmware file name: gwn7816fw.bin  
MD5 checksum: f9030fbd081525c6e508abb79a1a1b4d
- GWN7821P Firmware file name: gwn7821fw.bin  
MD5 checksum: b7bdd755b678377e197a9556692bd2e2
- GWN7822P Firmware file name: gwn7822fw.bin  
MD5 checksum: b7bdd755b678377e197a9556692bd2e2
- GWN7830 Firmware file name: gwn7830fw.bin  
MD5 checksum: b7bdd755b678377e197a9556692bd2e2
- GWN7831 Firmware file name: gwn7831fw.bin  
MD5 checksum: b7bdd755b678377e197a9556692bd2e2
- GWN7832 Firmware file name: gwn7832fw.bin  
MD5 checksum: f9030fbd081525c6e508abb79a1a1b4d

### CHANGES/ENHANCEMENT


- Added support for switch stacking feature for GWN7806(P), GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P), GWN7821P, GWN7822P, GWN7830, GWN7831, GWN7832.
- Added the Ability to disable the native VLAN.
- Added support for PVLAN for models of GWN7806(P), GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P), GWN7821P, GWN7822P, GWN7830, GWN7831, GWN7832.
- Added the option to set the Web GUI language on the configuration.

- Added support to use encrypted strings in password fields in CLI.
- Added support for "Calling-Station-Id" in RADIUS Access-Request
- Optimized CPU utilization.
- Fixed issue that SNMP missed support for FDB and VLAN MIBs (BRIDGE-MIB / Q-BRIDGE-MIB).
- Fixed issue that firmware upgrade fails due to HW Model mismatch error.
- Fixed issue that IP Source Guard not working as expected on GWN78xx.
- Fixed issue that New Zealand daylight saving cannot be configured due to start time cannot after end time.
- Fixed issue that IGMP Snooping might cause Multicast flooding.
- Fixed issue that fans running non-stop even at low temperature.
- Fixed issue that GWN7803P lost 192.168.0.1 gateway after reboot.
- Improved the accuracy of upload current rate value.
- Fixed internal bugs.

## NEW FEATURE OVERVIEW

- **Stacking Feature**

This feature can be enabled on Web UI Stack page. Please go to Grandstream Documentation Center check the GWN78xx Stacking Feature User Guide for more details.

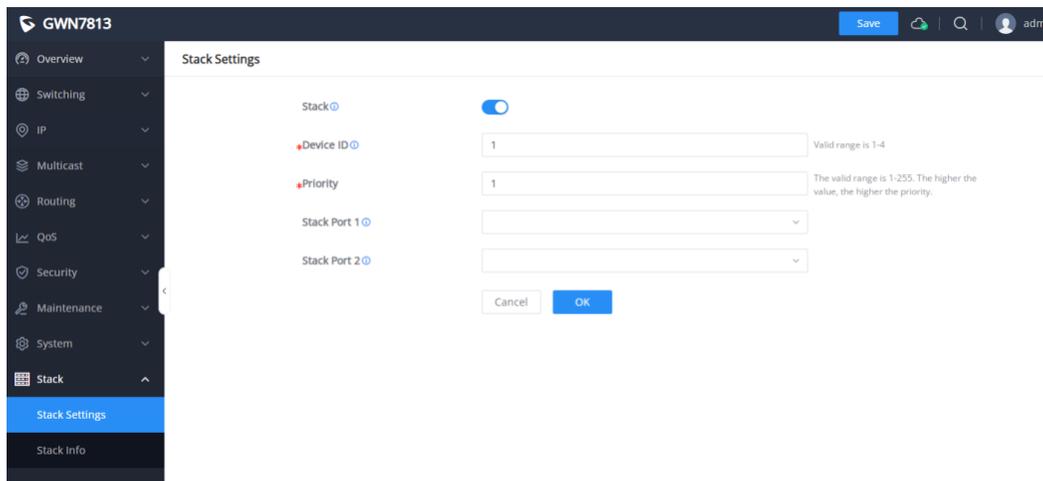

**Note:** After the configuration is completed through the CLI or Web GUI, you need to save it first, then restart the device. The device ID and port number will take effect after the restart is completed.

## FIRMWARE VERSION 1.0.13.18

### PRODUCT NAME

GWN7801(P), GWN7802(P), GWN7803(P), GWN7806(P)  
GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P)  
GWN7821P, GWN7822P  
GWN7830, GWN7831, GWN7832

### DATE

4/28/2025

### FIRMWARE FILE INFORMATION

- GWN7801(P) / 7802(P) / 7803(P) Firmware file name: gwn780xfw.bin  
MD5 checksum: ef2b2dd39f1bb75d7c57c1df54cc00e3
- GWN7806(P) Firmware file name: gwn7806fw.bin  
MD5 checksum: 4ea66f5f50051cedc9372eff9926d6bc
- GWN7811(P) / 7812P / 7813(P) Firmware file name: gwn781xfw.bin  
MD5 checksum: e6479bb368f02e100ced79f3d630f8b5
- GWN7816(P) Firmware file name: gwn7816fw.bin  
MD5 checksum: 4ea66f5f50051cedc9372eff9926d6bc
- GWN7821P Firmware file name: gwn7821fw.bin  
MD5 checksum: e6479bb368f02e100ced79f3d630f8b5
- GWN7822P Firmware file name: gwn7822fw.bin  
MD5 checksum: e6479bb368f02e100ced79f3d630f8b5
- GWN7830 Firmware file name: gwn7830fw.bin  
MD5 checksum: e6479bb368f02e100ced79f3d630f8b5
- GWN7831 Firmware file name: gwn7831fw.bin  
MD5 checksum: e6479bb368f02e100ced79f3d630f8b5
- GWN7832 Firmware file name: gwn7832fw.bin  
MD5 checksum: 4ea66f5f50051cedc9372eff9926d6bc

### CHANGES/ENHANCEMENT

- Optimized GWN783x CPU utilization.
- Fixed issue IGMP Snooping might cause Multicast Flooding.
- Fixed issue that the fan keeps running non-stop even the device is at low temperature.
- Fixed compatibility issue with GDMS that the Cloud configures 2.5G but local speed is Auto.
- Fixed compatibility issue with GDMS that the 2.5G port on GDMS is displayed in yellow-green instead of light blue.

## [11/20/2024] FIRMWARE VERSION 1.0.13.6

### PRODUCT NAME

GWN7821P, GWN7822P

### DATE

11/20/2024

### FIRMWARE FILE INFORMATION

- GWN7821P Firmware file name: gwn7821fw.bin  
MD5 checksum: c2fdc4d77dbeb700b617c7bce8dd406a
- GWN7822P Firmware file name: gwn7822fw.bin  
MD5 checksum: c2fdc4d77dbeb700b617c7bce8dd406a

This is the initial firmware version for GWN7821P/7822P.

## FIRMWARE VERSION 1.0.13.6

### PRODUCT NAME

GWN7801(P), GWN7802(P), GWN7803(P), GWN7806(P)  
GWN7811(P), GWN7812P, GWN7813(P), GWN7816(P)  
GWN7830, GWN7831, GWN7832

### DATE

10/21/2024

### FIRMWARE FILE INFORMATION

- GWN7801(P) / 7802(P) / 7803(P) Firmware file name: gwn780xfw.bin  
MD5 checksum: 3076343d9809e252a19f937ccfe5cf31
- GWN7806(P) Firmware file name: gwn7806fw.bin  
MD5 checksum: 0ddf14f3a340ed78609b4db6a784e465
- GWN7811(P) / 7812P / 7813(P) Firmware file name: gwn781xfw.bin  
MD5 checksum: c2fdc4d77dbeb700b617c7bce8dd406a
- GWN7816(P) Firmware file name: gwn7816fw.bin  
MD5 checksum: 0ddf14f3a340ed78609b4db6a784e465
- GWN7830 Firmware file name: gwn7830fw.bin  
MD5 checksum: c2fdc4d77dbeb700b617c7bce8dd406a
- GWN7831 Firmware file name: gwn7831fw.bin  
MD5 checksum: c2fdc4d77dbeb700b617c7bce8dd406a
- GWN7832 Firmware file name: gwn7832fw.bin  
MD5 checksum: 0ddf14f3a340ed78609b4db6a784e465

### CHANGES/ENHANCEMENT

- Added support for GWN7821P and GWN7822P model.
- Added support for BGP & Route Policy on L3 Switch.
- Added support for MVR(CLI).
- Added LED status change during the start-up process
- Removed PTP settings from Web UI.
- Optimized IPv6 OSPFv3 CLI command.
- Optimized GWN780x CPU usage.
- Fixed from GWN Cloud login the Web UI fails when HTTPS login authentication method is TACACS+.
- Fixed issue that unable to import configuration files from older versions.
- Fixed issue that user can still add a method successfully when the AAA name already exists.
- Fixed the IP Address will be set to 0.0.0.0 when enable Querier via GWN Cloud.

- Fixed Profile import fails after changing the profile name.

## NEW FEATURE OVERVIEW

- **BGP**

### Only L3 switches are supported.

BGP is a border gateway protocol that is used to transfer routing information between different AS. It provides following function:


**Path selection:** Determine the best route by comparing the path attributes of different destinations.

**Routing Policies:** Select specific segments by defining routing policies.

**Aggregation:** By aggregating multiple route declarations, the number of routing information is reduced, the routing table is simplified, and the processing load is reduced.

**Loop avoidance:** Path vectors are used to prevent routing loops. Each BGP router knows the best path to each destination and uses this information to avoid loops.


**Security maintenance:** MD5 authentication is used to protect routing information from unauthorized access or tampering.

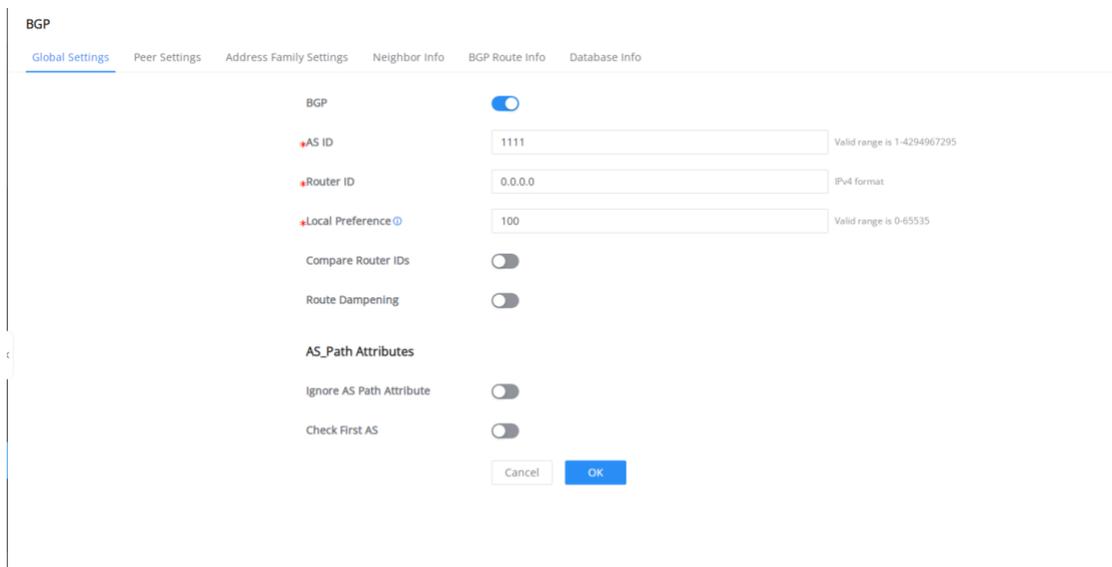

The screenshot shows the 'BGP Global Settings' configuration page. The 'BGP' toggle is turned on. The configuration fields are as follows:

- AS ID:** 1111 (Valid range is 1-4294967295)
- Router ID:** 0.0.0.0 (IPv4 format)
- Local Preference:** 100 (Valid range is 0-65535)
- Compare Router IDs:** Disabled
- Route Dampening:** Disabled
- AS\_Path Attributes:**
  - Ignore AS Path Attribute: Disabled
  - Check First AS: Disabled

Buttons for 'Cancel' and 'OK' are visible at the bottom.

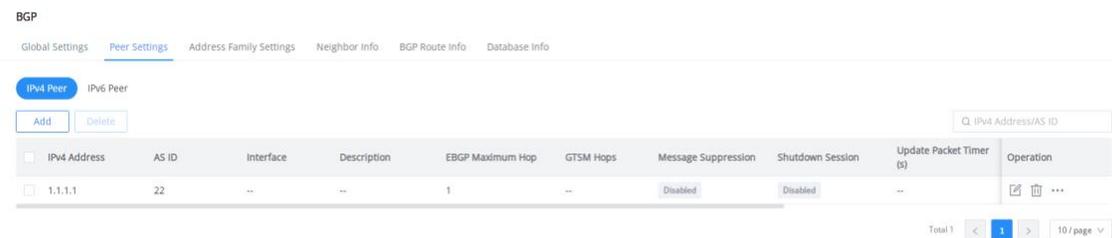

The screenshot shows the 'BGP Peer Settings' table with the following data:

IPv4 Peer	IPv6 Peer	Q IPv4 Address/AS ID									
IPv4 Address	AS ID	Interface	Description	EBGP Maximum Hop	GTSM Hops	Message Suppression	Shutdown Session	Update Packet Timer (s)	Operation		
<input type="checkbox"/>	<input type="checkbox"/>	1.1.1.1	22	--	--	1	--	Disabled	Disabled	--	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

Total: 1 / 10 page

[IPv4 Peer](#) > [Edit IPv4 Peer](#)

IPv4 Address	<input type="text" value="1.1.1.1"/>	
AS ID	<input type="text" value="22"/>	
Interface	<input type="text"/>	
Description	<input type="text"/>	0-64 characters, including numbers, letters and special characters except "\/?:, and spaces
TTL Related	<input checked="" type="radio"/> EBGp Maximum Hop <input type="radio"/> GtSM Hops	
EBGP Maximum Hop	<input type="text" value="1"/>	Valid range is 1-255
Message Suppression	<input type="checkbox"/>	
Shutdown Session	<input type="checkbox"/>	
Update Packet Timer (s)	<input type="text"/>	Valid range is 0-600, 0 indicates disabled.
MDS	<input type="checkbox"/>	
<b>Timer Settings</b>		
Keepalive Interval (s)	<input type="text" value="60"/>	Valid range is 1-21845
Hold Interval (s)	<input type="text" value="180"/>	Valid range is 3-65535
Connect Retry Interval (s)	<input type="text" value="120"/>	Valid range is 1-65535
	<input type="button" value="Cancel"/>	<input type="button" value="OK"/>

**BGP**
[Global Settings](#)   [Peer Settings](#)   [Address Family Settings](#)   [Neighbor Info](#)   [BGP Route Info](#)   [Database Info](#)
[IPv4 Unicast Routing](#)   [IPv6 Unicast Routing](#)
   


Peer Address	Enable	Advertise All Paths	Advertise Best Path Per AS	Receive the Same AS Path as Itself	Advertise Default Path	Set Nexthop as Local Address	Delete AS	Operation
1.1.1.1	<span style="color: green;">Enabled</span>	<span style="color: gray;">Disabled</span>	<span style="color: gray;">Disabled</span>	Off	<span style="color: gray;">Disabled</span>	<span style="color: gray;">Disabled</span>	Off	<input type="button" value="ⓘ"/>

 Total 1            
**BGP**
[Global Settings](#)   [Peer Settings](#)   [Address Family Settings](#)   [Neighbor Info](#)   [BGP Route Info](#)   [Database Info](#)
[IPv4 Neighbor info](#)   [IPv6 Neighbor Info](#)


Neighbor IP	BGP Version	AS ID	Received Messages	Sent Messages	Messages to be sent	Received Prefix	Current Status Duration	Status	Operation
1.1.1.1	4	22	0	0	0	0	never	Active	<input type="button" value="ⓘ"/>

 Total 1

**BGP**

Global Settings Peer Settings Address Family Settings Neighbor Info BGP Route Info Database Info

IPv4 BGP Route Info IPv6 BGP Route Info

Refresh

No BGP prefixes displayed, 0 exist

**BGP**

Global Settings Peer Settings Address Family Settings Neighbor Info BGP Route Info Database Info

Type

Query

**Database Info**

```

Half-life time: 15 min
Reuse penalty: 750
Suppress penalty: 2000
Max suppress time: 60 min
Max suppress penalty: 12000
  
```

- **Routing policy**

Only supported by L3 switches and effective only when used with BGP, other dynamic routing protocols are currently not supported.

Route policies control route advertisement and reception, as well as manage route import and attribute settings by altering route attributes.

The steps for implementing a route policy are: (1) First, define the characteristics of the route

information to which the policy will be applied, i.e., define a set of matching rules. Various matching rules can be flexibly defined using filters; (2) Then, apply the matching rules to the route policy for processes such as route advertisement, reception, and import.

Supported route policy filters include Access Lists and prefix lists.

Route Policy

[Based on IPv4 Access List](#)
[Based on IPv6 Access List](#)
[Based on IPv4 Prefix List](#)
[Based on IPv6 Prefix List](#)

Add Delete

<input type="checkbox"/>	Name	Match Pattern	IPv4 Address / Mask Length	Operation
<input type="checkbox"/>	test	Allow	192.168.10.0/24	

Total 1 < 1 > 10 / page v

Route Policy

[Based on IPv4 Access List](#)
[Based on IPv6 Access List](#)
[Based on IPv4 Prefix List](#)
[Based on IPv6 Prefix List](#)

Add Delete

<input type="checkbox"/>	Name	Rule Number	Operation
<input type="checkbox"/>	see	2	

Total 1 < 1 > 10 / page v

Based on IPv4 Prefix List > [see Rule Details](#)

Add Rule Delete

<input type="checkbox"/>	Rule ID	Match Pattern	Address Prefix	Operation
<input type="checkbox"/>	1	Allow	192.168.122.0/24	
<input type="checkbox"/>	2	Allow	192.168.124.0/24	

Total 2 < 1 > 10 / page v

- **MVR [CLI only]**

The multicast VLAN registration function is used to optimize the transmission efficiency of multicast streams across different VLANs, reducing unnecessary traffic duplication and flooding, and effectively improving network performance.

```
GWN7813(config)# mvr
<cr>
group      MVR group address configuration
mode       MVR mode configuration
query-time MVR Query Response Time
vlan       MVR VLAN ID configuration
```