

# GWN780x Switch Firmware Release Notes

## IMPORTANT UPGRADING NOTE

1. **GWN780x 1.0.5.52 requires GWN Manager version to be at least 1.1.28.27 or newer.**
2. **Once GWN780x is upgraded to firmware 1.0.5.x, downgrading to 1.0.3.x or lower firmware version is not allowed.**
3. Once GWN780x is upgraded to firmware 1.0.3.x, downgrading to 1.0.1.x or lower firmware version is not allowed.
4. [6/15/2023] Regarding Cloud management, any switch version below 1.0.3.x does not support GWN Cloud provision (1.0.1.x only supports GWN Cloud remote tunneling to local web UI). Therefore, upgrade from 1.0.1.x to 1.0.3.x or above cannot be performed through GWN Cloud. Administrators need to either login to device locally or remote tunneling from Cloud, and then upgrade to 1.0.3.x through local web UI. After upgrade 1.0.3.x device can be managed or perform further upgrade through GWN Cloud.

## Table of Content

<b>IMPORTANT UPGRADING NOTE .....</b>	<b>1</b>
<b>FIRMWARE FILE DOWNLOAD .....</b>	<b>4</b>
<b>FIRMWARE VERSION 1.0.5.61 .....</b>	<b>5</b>
PRODUCT NAME .....	5
DATE .....	5
FIRMWARE FILE INFORMATION .....	5
CHANGES/ENHANCEMENT.....	5
NEW FEATURE OVERVIEW.....	7
<b>FIRMWARE VERSION 1.0.3.37 .....</b>	<b>28</b>
PRODUCT NAME .....	28
DATE .....	28
FIRMWARE FILE INFORMATION .....	28
CHANGES/ENHANCEMENT.....	28
<b>FIRMWARE VERSION 1.0.3.19 .....</b>	<b>30</b>
PRODUCT NAME .....	30
DATE .....	30
FIRMWARE FILE INFORMATION .....	30
CHANGES/ENHANCEMENT.....	30
<b>FIRMWARE VERSION 1.0.1.36 .....</b>	<b>32</b>
PRODUCT NAME .....	32
DATE .....	32
FIRMWARE FILE INFORMATION .....	32
CHANGES/ENHANCEMENT.....	32
<b>FIRMWARE VERSION 1.0.1.30 .....</b>	<b>33</b>
PRODUCT NAME .....	33
DATE .....	33
FIRMWARE FILE INFORMATION .....	33
CHANGES/ENHANCEMENT.....	33
<b>FIRMWARE VERSION 1.0.1.20 .....</b>	<b>35</b>
PRODUCT NAME .....	35
DATE .....	35

FIRMWARE FILE INFORMATION .....	35
CHANGES/ENHANCEMENT.....	35

## FIRMWARE FILE DOWNLOAD

Individual firmware files are available for downloading at URL below:

<https://www.grandstream.com/support/firmware>

## FIRMWARE VERSION 1.0.5.61

### PRODUCT NAME

GWN7801(P) / GWN7802(P) / GWN7803(P)

### DATE

8/5/2024

### FIRMWARE FILE INFORMATION

- GWN780x Firmware file name: gwn780xfw.bin  
MD5 checksum: 28cf361717a335c281ed3d8aacb6c163

### CHANGES/ENHANCEMENT

- Optimized memory fragmentation caused by frequent configuration changes.
- Adjust the maximum length of the command line to 2000.
- Optimized searching for Web GUI.
- Optimized CPU and memory usage in Web GUI.
- Optimized device IP address display.
- Optimized trunk port settings.
- Optimized DHCP server and DHCP relay.
- Optimized DHCP option 43 settings for DHCP server.
- Optimized routing table.
- Optimized remote ID and Circuit ID for DHCP Snooping.
- Optimized EEE.
- Optimize GWN Manager settings.
- Added more port details such as neighbor and PoE power history info.
- Added port scheduled enabling feature.
- Added more port statistics info.


- Added loopback detection.
- Added support for QinQ.
- Added MAC-based VLAN.
- Added protocol-based VLAN.
- Added VLAN translation.
- Added untagged OUI mode for voice VLAN.
- Added gateway priority when using DHCP to get VLAN IP address.
- Added default gateway configuration under MGMT VLAN.
- Added ACL advanced settings, including mirroring, statistic and priority remapping for rule.
- Added rate limit by ACL binding to VLAN.
- Added import/export IPSG binding table for IP Source Guard.
- Added IPv6 Source Guard.
- Added mask for IPSG/IPv6SG.
- Added MAC bypass authentication.
- Added DHCPv6 Snooping.
- Added entries fixed for DHCP/DHCPv6 Snooping.
- Added upgrade by FTP and Explicit FTPS.
- Added connection diagnostics with GWN.Cloud/Manager.
- Add DST mode for time settings.
- Add HTTPS/SSH port customization.
- Add GWN Manager takeover function.
- Added support to see switch clients and other information.
- Fixed the issue when using STP, connected switch reboots might cause the entire system loses internet connectivity.
- Fixed the issue that the network packets show wrong Circuit ID/Remote ID of DHCP's Option 82.
- Fixed the issue that the device fails to pair with the GWN Manager.
- Fixed issue that Polycom devices failed to assume the Voice VLAN through LLDP-MED.

- Expanded DHCP leases range up to 11520 min
- Some internal bugs fixed.

## NEW FEATURE OVERVIEW


- **Optimize searching for WEB GUI**

A secondary TAB on the left and a TAB at the top of a specific page have been added to support direct jump to a specified page.

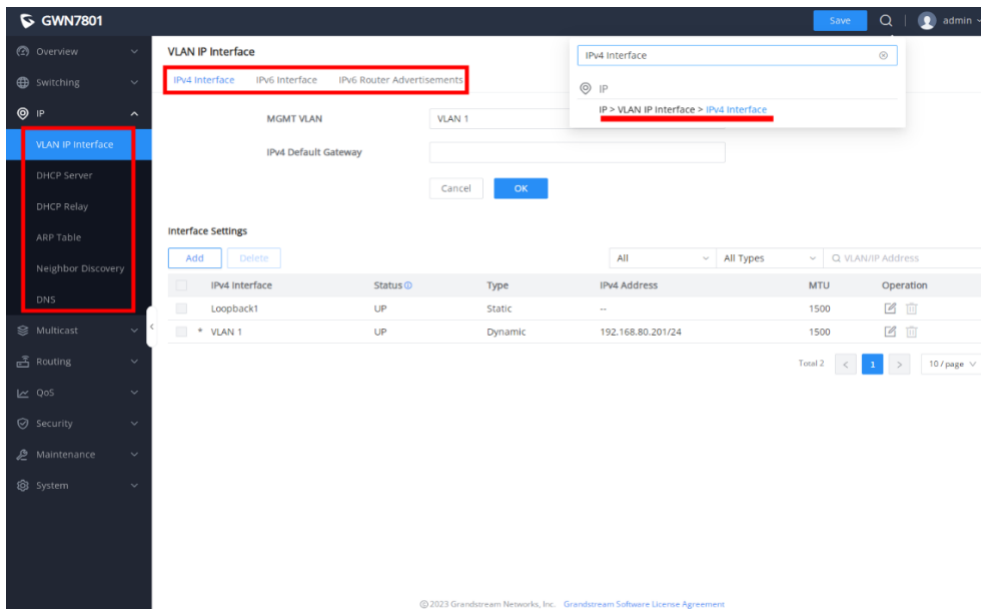


- **Optimize CPU and memory usage in Web GUI**

Supports viewing historical information of CPU and memory and assists in checking problems of high CPU and memory usage.

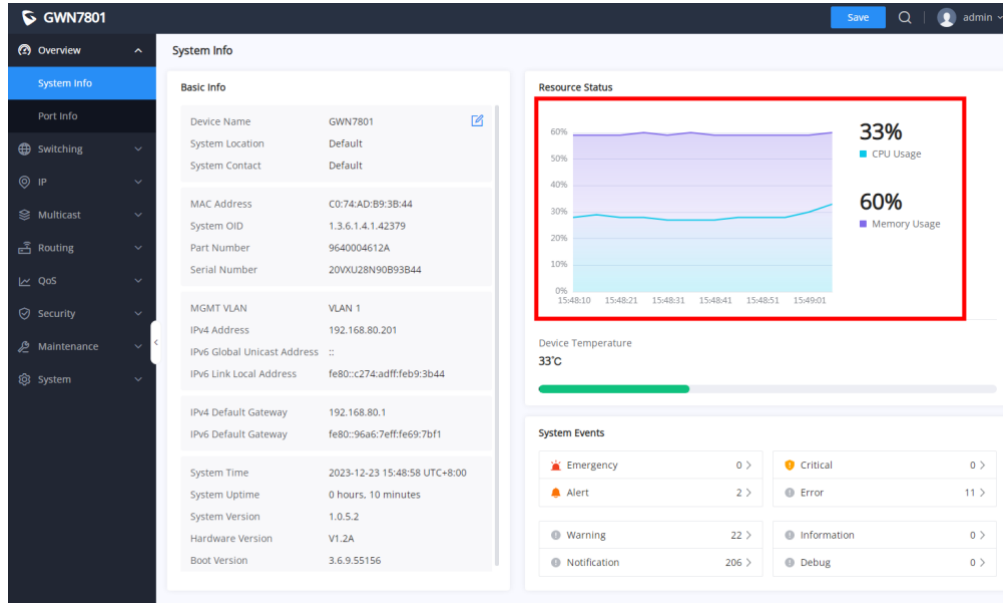

- **Optimize device IP address display**

Displays the IP address information of the management VLAN, including the IPv4 address, IPv6 link-local address, and global unicast address, and also displays the switch default gateway address.

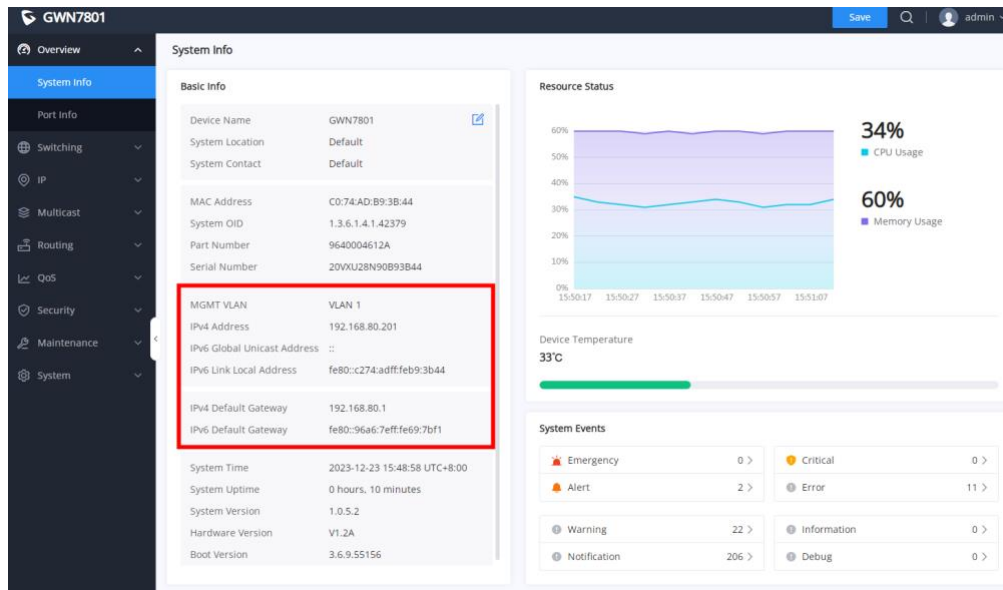


- **Add more port details such as neighbor, PoE power history info**

Supports viewing the port neighbor information, including device name, MAC address, IP address, speed, and connection duration.

Supports viewing the PoE power history to help troubleshoot PoE power supply.



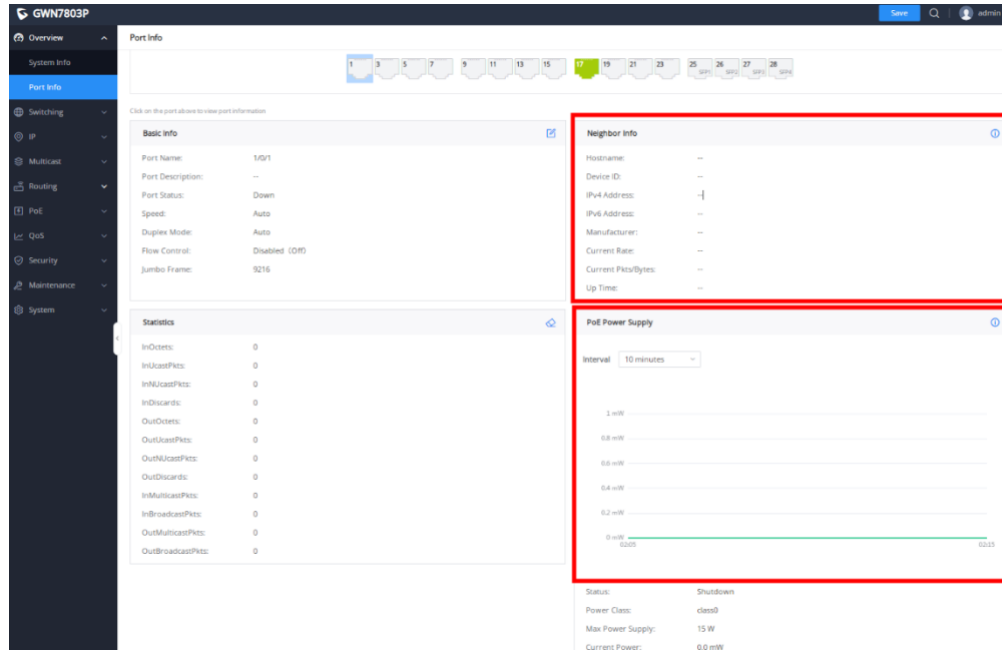


The screenshot shows the 'Port Info' page for port 1/0/1. The 'Neighbor Info' and 'PoE Power Supply' sections are highlighted with a red box. The 'PoE Power Supply' section includes a graph showing power consumption over time, with a current power of 0.0 mW.


Section	Field	Value
Basic Info	Port Name	1/0/1
	Port Description	--
	Port Status	Down
	Speed	Auto
	Duplex Mode	Auto
	Flow Control	Disabled (DF)
	Jumbo Frame	9216
Statistics	InOctets	0
	InUnicastPkts	0
	InMulticastPkts	0
	InDiscards	0
	OutOctets	0
	OutUnicastPkts	0
	OutMulticastPkts	0
	OutDiscards	0
	InMulticastPkts	0
	InBroadcastPkts	0
	OutMulticastPkts	0
	OutBroadcastPkts	0
Neighbor Info	Hostname	--
	Device ID	--
	IPv4 Address	--
	IPv6 Address	--
	Manufacturer	--
PoE Power Supply	Interval	10 minutes
	1 mW	
	0.8 mW	
	0.6 mW	
0.4 mW		
0.2 mW		
0 mW	0.005	
Status	Shutdown	
Power Class	class0	
Max Power Supply	15 W	
Current Power	0.0 mW	

- **Add port scheduled enabling feature**

You can customize the Scheduled enable time for a port, including physical ports and LAGs.

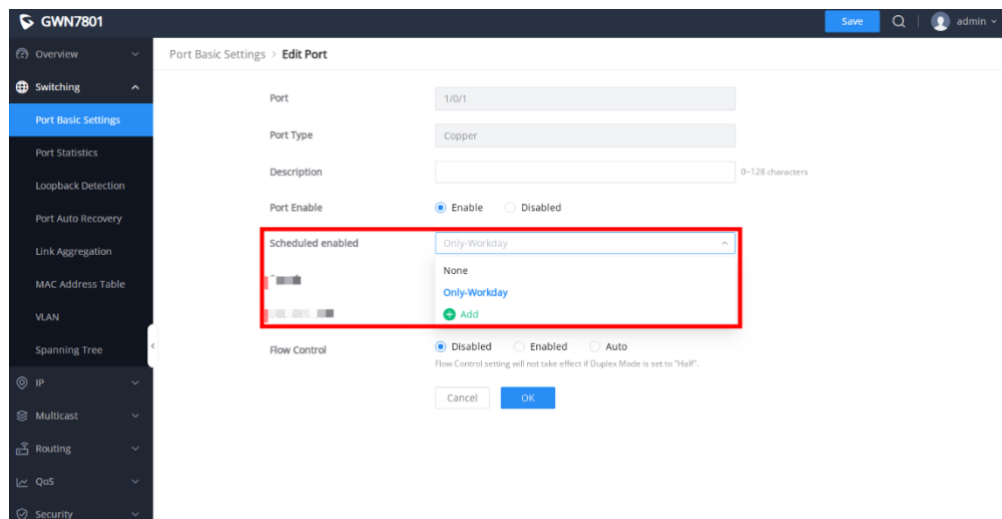


The screenshot shows the 'Port Basic Settings' page for port 1/0/1. The 'Scheduled enabled' dropdown menu is highlighted with a red box, showing options: 'Only-Workday', 'None', and 'Only-Workday'. The 'Port Enable' section is set to 'Enable'.

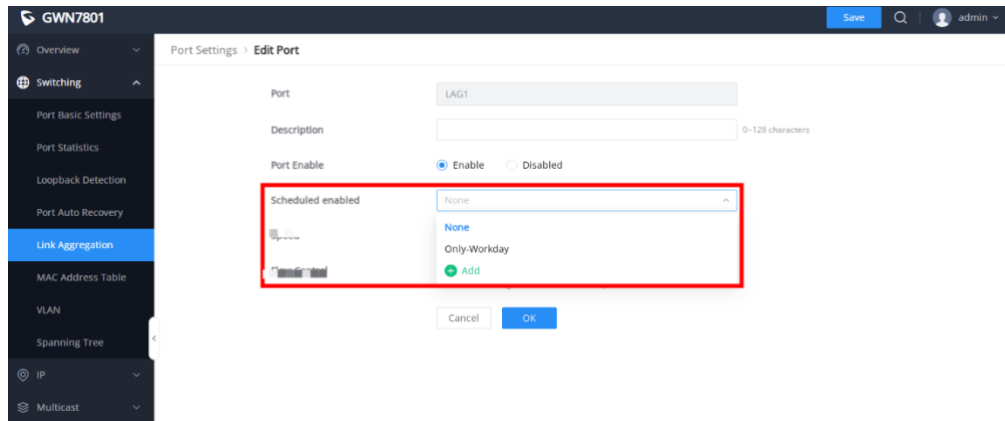

- **Add more port statistics info**


Support viewing port Private MIB information.

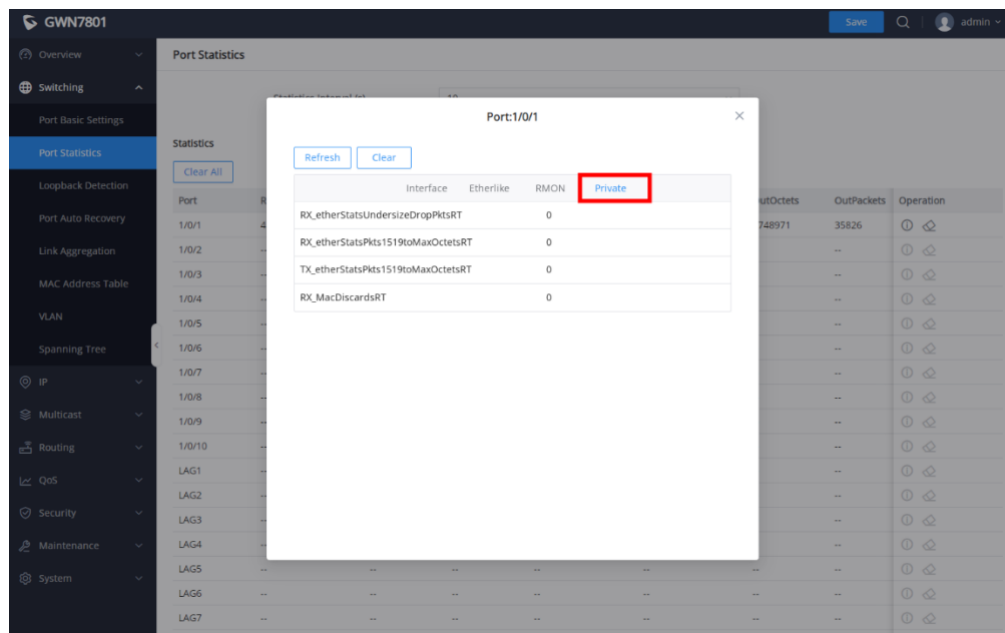

- **Add loopback detection**

By enabling the interface loop detection function, detection messages are periodically sent from the interface to check whether the message is returned to the device, and then determine whether the device has a loop. After a loop is found, the port is automatically shut down to break the loop and ensure the normal operation of the network environment.


Note: If STP is enabled, STP loop protection takes precedence over interface loop protection, that is, interface loop protection will not take effect.

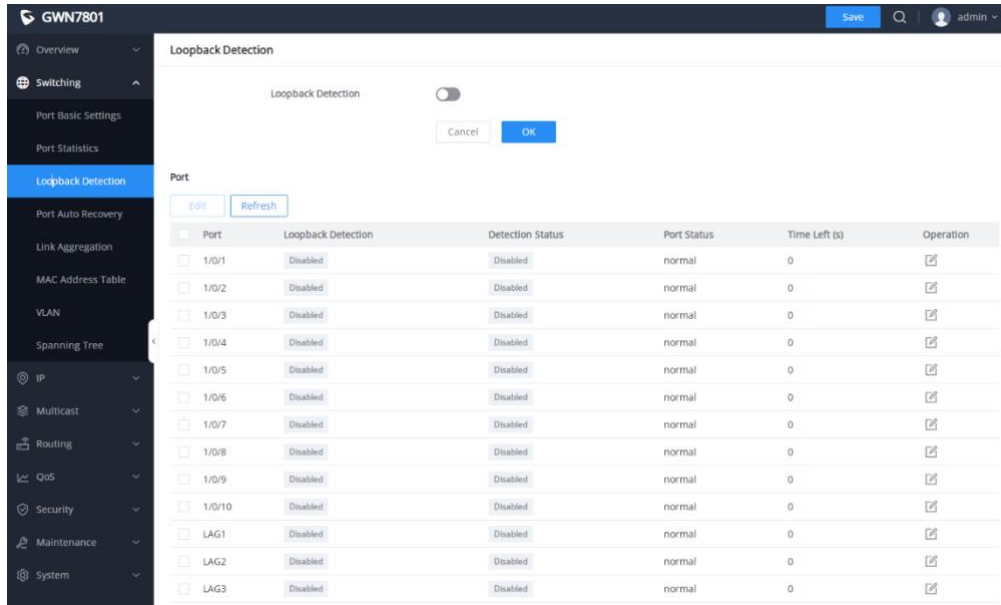


- **Add QinQ**

An 802.1Q tag (VLAN tag) is added to the original 802.1Q packet header. Through the double-layer tag, the number of VLANs is increased to 802.1Q.


QinQ encapsulates the user's private network VLAN Tag in the public network (service provider) network VLAN Tag, allowing the double-layer VLAN Tag message to pass through the operator's backbone network (public network). In the public network, the message is transmitted according to the outer VLAN Tag (that is, the public network VLAN Tag), shielding the user's private network VLAN Tag, thereby providing a simple L2 VPN tunnel for the user.

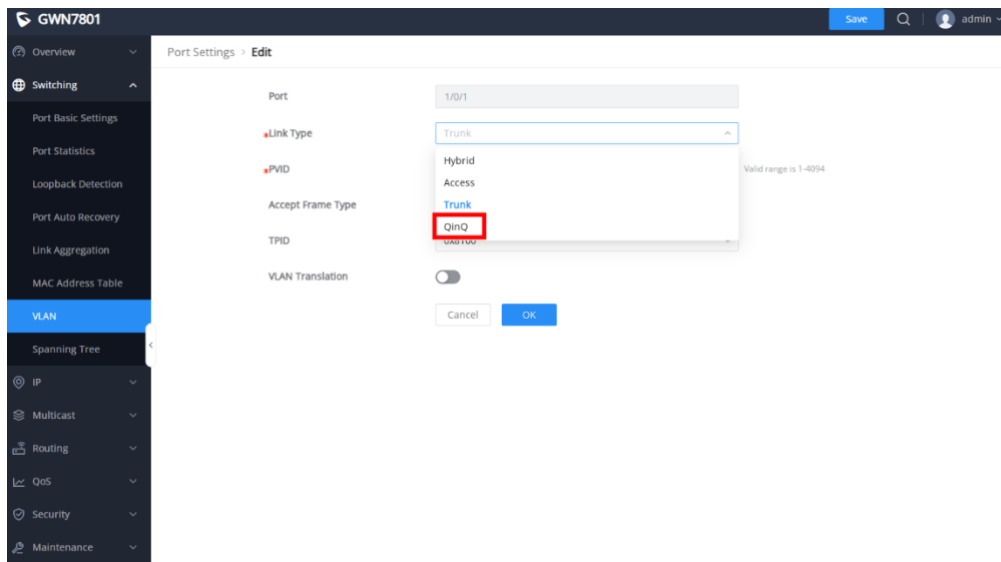

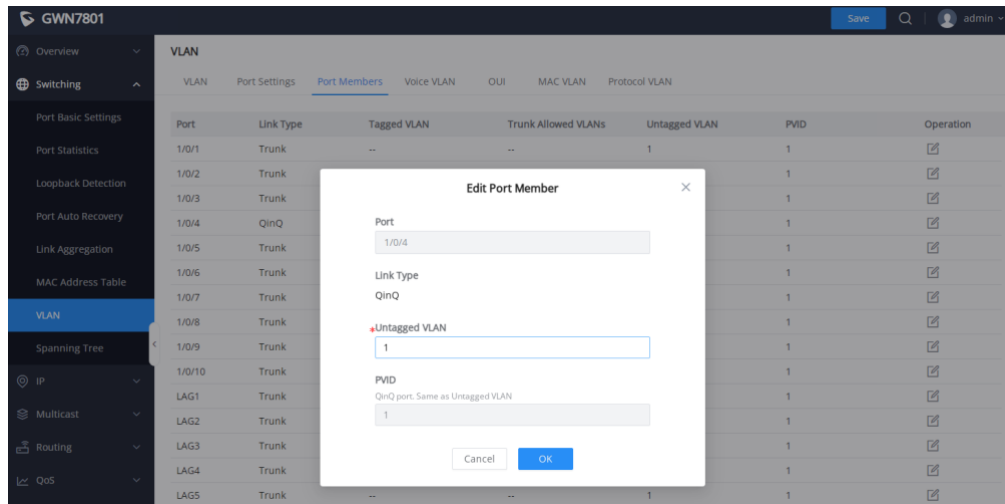

- **Optimize trunk port settings**

Trunk Allowed VLANs allows configuration of VLANs that do not yet exist on the switch, and takes effect only for configured VLANs.


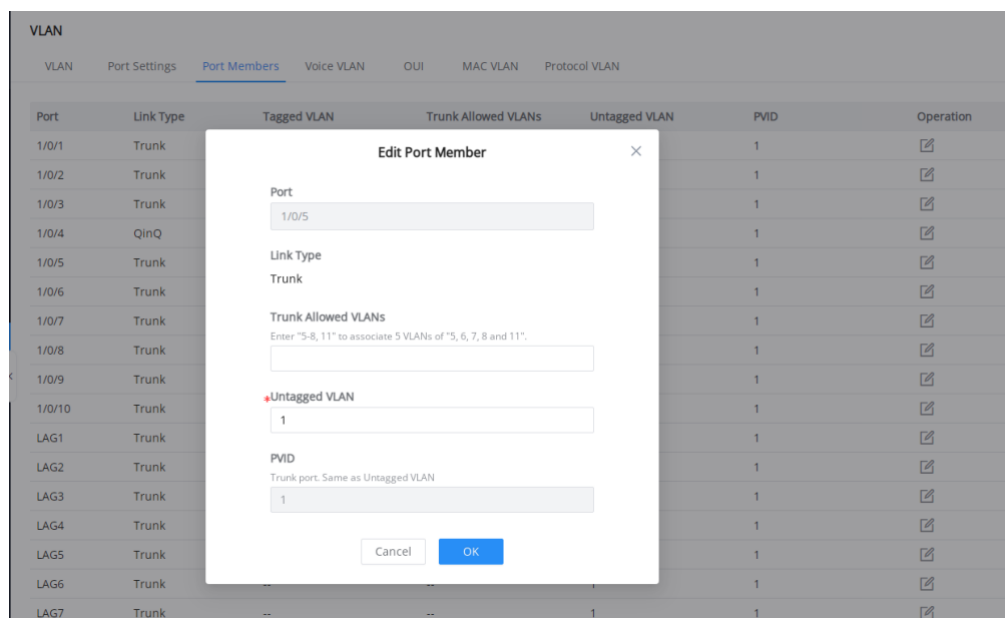


Port	Link Type	Tagged VLAN	Trunk Allowed VLANs	Untagged VLAN	PVID	Operation
1/0/1	Trunk	--	--	1	1	[edit]
1/0/2	Trunk	2-16	2-298	1	1	[edit]
1/0/3	Trunk	--	--	1	1	[edit]
1/0/4	QinQ	--	--	1	1	[edit]
1/0/5	Trunk	--	--	1	1	[edit]

- **Add MAC-based VLAN**

VLANs are divided according to the source MAC address of the data frame. Through the configured MAC address and VLAN mapping table, when the switch receives an untagged frame, it adds the specified VLAN tag to the data frame according to the mapping table.

Note: This is only effective for Hybrid ports.

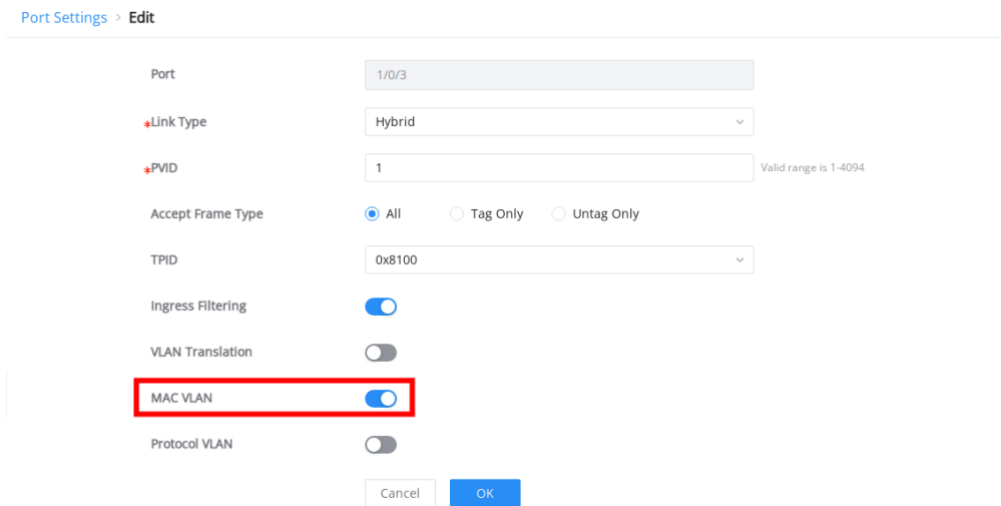
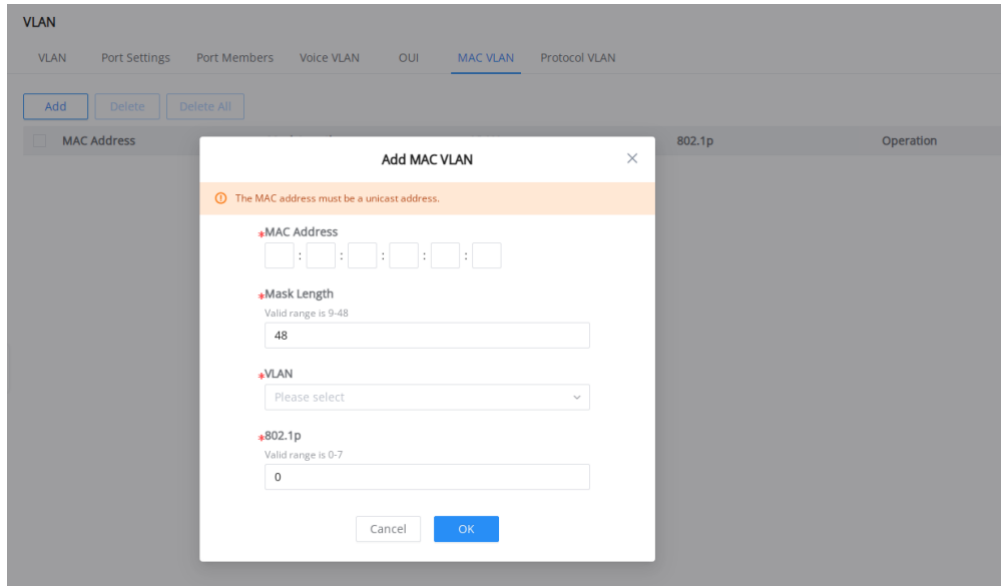


- **Add protocol-based VLAN**

VLANs are divided according to the protocol (family) type and encapsulation format to which the data frame belongs. Through the configured protocol field and VLAN mapping table in the Ethernet frame, when the switch receives an untagged frame, it adds the specified VLAN Tag according to the mapping

table.

Note: This is only effective for Hybrid ports.

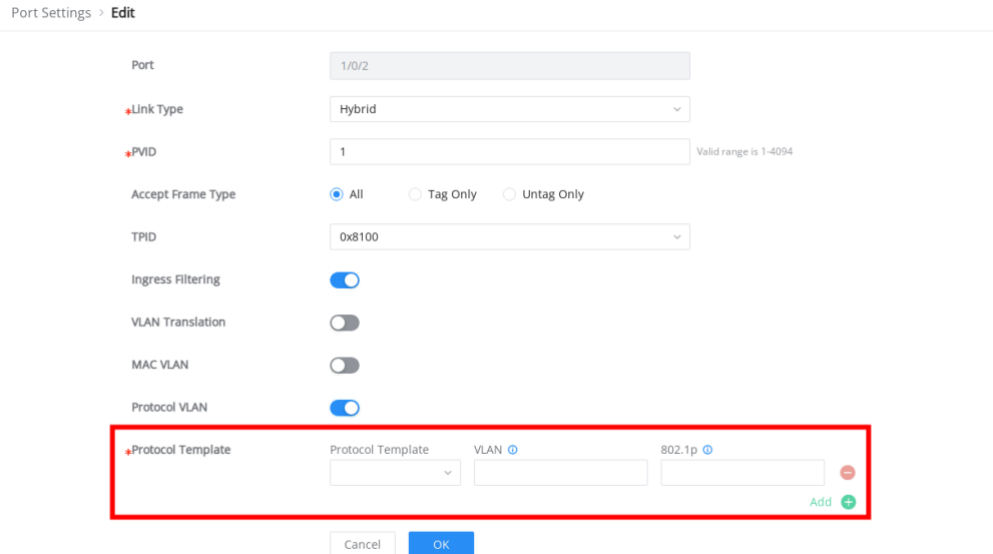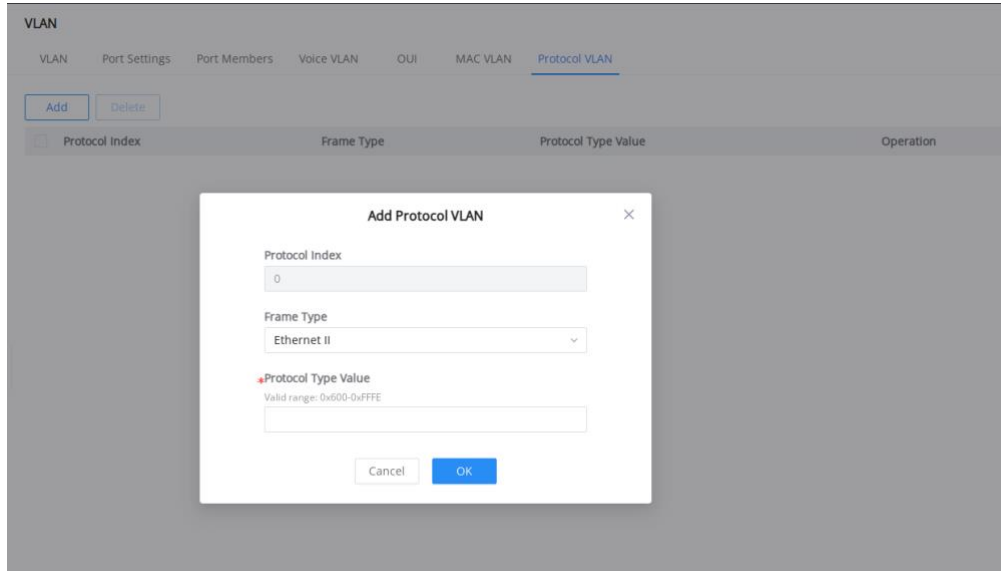

- **Add VLAN translation**

By modifying the VLAN Tag carried in the message, different VLANs can be mapped to each other.

Note: a. This feature is only effective for Trunk and Hybrid ports.

b. Configuration restrictions:

(1) The GWN7800 series switches only support the 1 to 1 function of the outer VLAN (including 1:1 and N:1).

(2) The outer VLAN allows the configuration of a single VLAN or a VLAN range. Only one outer VLAN

can be configured after mapping, and it must be a VLAN to which the port has been added.

(3) The total number of VLAN mapping groups supported by the switch is 256, and the maximum number of VLAN mapping groups supported on a single port is 128.

(4) The total number of VLAN ranges supported by the switch is 16, and the maximum number of VLAN ranges supported on a single port is 16.

Port Settings > Edit

Port	1/0/2	
+Link Type	Trunk	
+PVID	1	Valid range is 1-4094
Accept Frame Type	<input checked="" type="radio"/> All <input type="radio"/> Tag Only <input type="radio"/> Untag Only	
TPID	0x8100	
VLAN Translation	<input checked="" type="checkbox"/>	
Ingress	<input type="checkbox"/>	

**VLAN Mapping1**

+Outer VLAN

+VLAN after Outer Mapping

Add

- **Add untagged OUI mode for voice VLAN**

Compared with the Tagged OUI mode, the Untagged OUI mode is added. The only difference is that the Untagged label is added, and the rest is the same as the Tagged OUI mode.

VLAN



VLAN Port Settings Port Members **Voice VLAN** OUI MAC VLAN Protocol VLAN

Voice VLAN	Untagged OUI	
+Voice VLAN ID	Disabled	
+CoS/802.1p Priority	Auto Voice VLAN	Valid range is 0-7
CoS Remarking	Tagged OUI	
+Aging Time (Min)	Untagged OUI	
	1440	Valid range is 30-65536

- **Add gateway priority when using DHCP to get VLAN IP address**

The IPv4 interface supports specifying a priority when obtaining a gateway from DHCP; the IPv6 interface supports specifying a priority when obtaining an IPv6 global unicast address gateway from SLAAC, Stateless DHCPv6, and Stateful DHCPv6.



Note: The gateway priority is: statically configured gateway > gateway with a set priority (the smaller the priority value, the greater the priority) > gateway obtained from DHCP on the VLAN interface (VLAN ID from small to large, first come first served). If the statically configured gateway network segment is the same as any interface network segment, the statically configured gateway takes effect. Otherwise, the effective gateway is selected according to the gateway priority configuration. If the priorities are the same, the gateway with the smaller VLAN ID takes effect first.

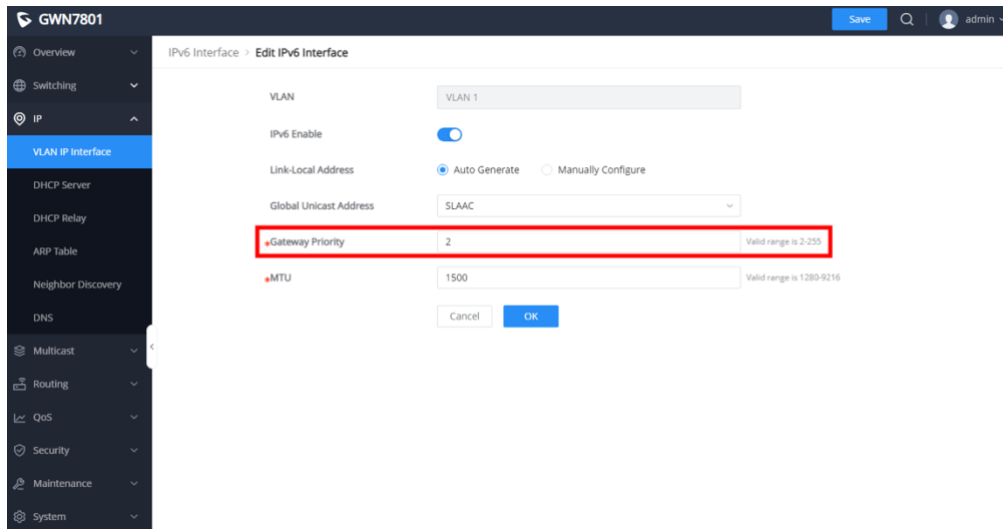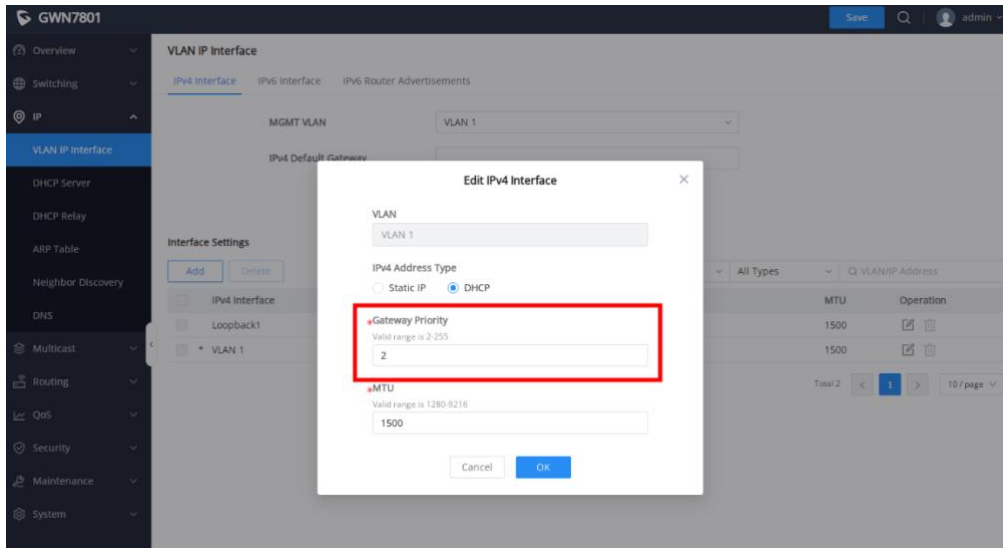

- **Add default gateway configuration under MGMT VLAN**


Configure a default static gateway in the MGMT VLAN and keep the configuration synchronized with the default route next hop address added to the static route.



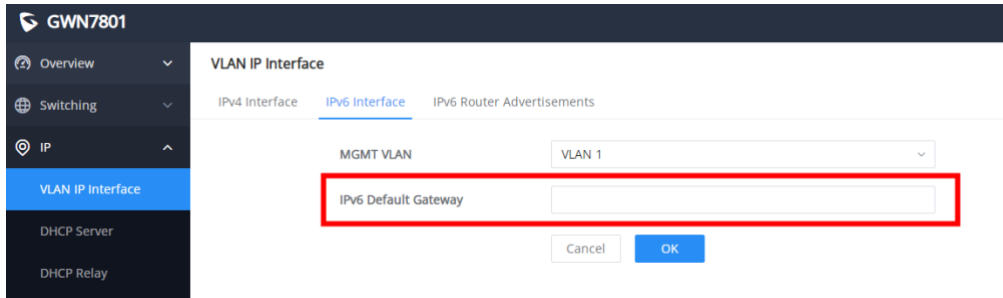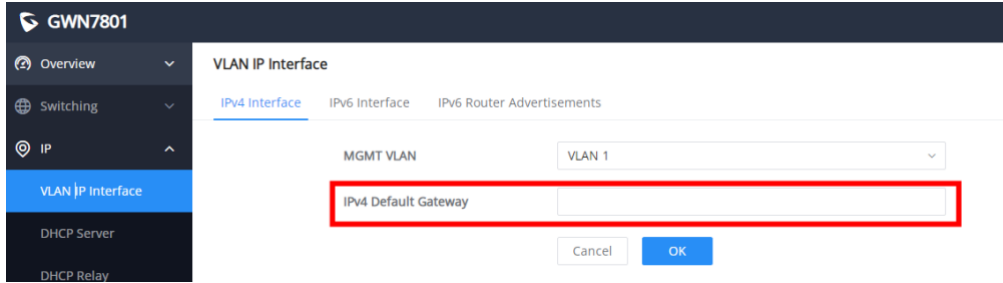

- **Optimize DHCP option 43 configurations for DHCP server**

Supports configuring specified services for DHCP Option 43.

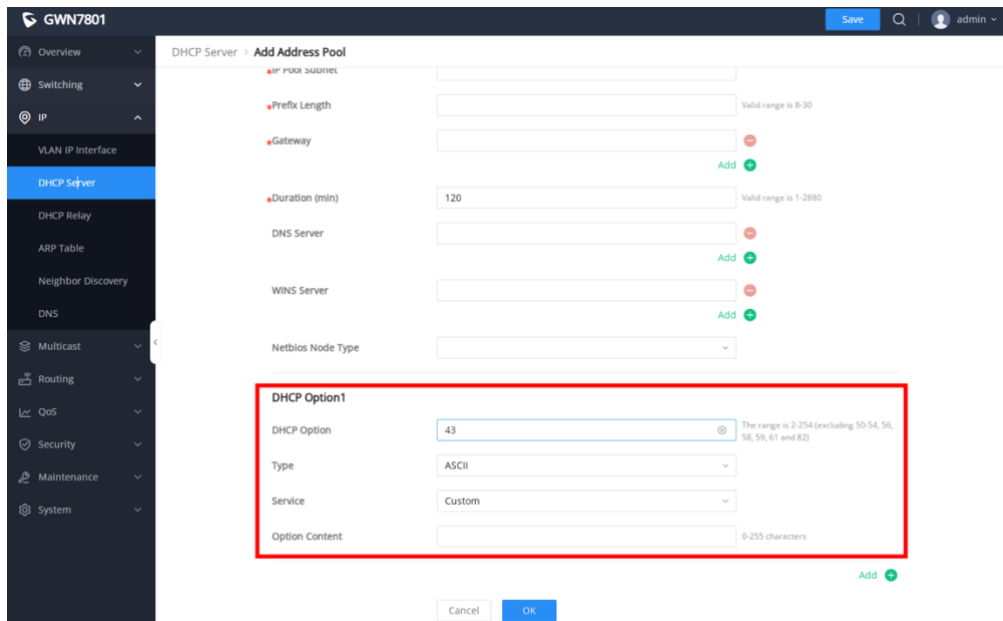

- **Optimize routing table**

Optimize the destination IP address display and increase the Path Cost value

Routing Table

IPv4 Routing Table IPv6 Routing Table

Refresh

All Types Q Destination IP Address/Nex...

Destination IP Address	Protocol Type	Priority	Cost	Next Hop	Outgoing Interface	Flags
0.0.0.0/0	DHCP	1	0	192.168.80.1	VLAN 1	SFA
192.168.80.0/24	Direct	0	0	0.0.0.0	VLAN 1	SFA

Total 2 < 1 > 10 / page

- **Add ACL advanced settings, including mirroring, statistic and priority remapping for rule**

Statistics: Once the ACL rule is hit, the counting starts. Supports statistics by packet or by byte.

Mirror: After selecting the mirror group, you need to go to Maintenance → Diagnosis → Mirror Configuration Observation Port to take effect.

Priority Mapping: After it is turned on, once the ACL rule is hit, the priority of the message will be remapped inside the switch.

ACL > Add ACL

Source IP Address  Any  Custom

Destination IP Address  Any  Custom

Tos Type

Time Policy

**Advanced Settings**

Count

\*Count ID  Valid range is 1-32

Count Unit  By packet  By byte

Mirroring

\*Mirroring Group

Go to "Maintenance>Diagnostics>Mirroring" to configure the monitor port to take effect

Priority Mapping

\*Priority  Valid range is 0-7

Rate Limit

The rate limit function needs to go to "Security→ACL→Rate Limit Settings" to configure the rate limit group to take effect

- **Add rate limit by ACL binding to VLAN**

Speed limit for VLAN. By binding VLAN to ACL, speed limit is achieved by selecting speed limit group for rules. Once the rule is hit, it will take effect according to the settings of the specified speed limit

group.

ACL rule setting speed limit function: select speed limit group.

ACL > Add ACL

**ACL Name**  1-64 characters

**Rule Settings**

**Rule ID**  Valid range is 1-2147483647. The smaller ID is matched first.

**Action**

**Protocol Type**

**Source IP Address**  Any  Custom

**Destination IP Address**  Any  Custom

**Tos Type**

**Time Policy**

**Advanced Settings**

**Count**

**Mirroring**

**Priority Mapping**

**Rate Limit**

The rate limit function needs to go to "Security->ACL->Rate Limit Settings" to configure the rate limit group to take effect

VLAN bind ACL:

ACL

IPv4 ACL IPv6 ACL MAC ACL Port Binding to ACL VLAN Binding to ACL Rate Limit Settings

VLAN	IPv4 ACL Name	MAC ACL Name	Operation
<input type="checkbox"/> 1	--	--	<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> 2			<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> 3			<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> 4			<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> 5			<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> 6			<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> 7			<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> 8			<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> 9			<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> 10			<input type="checkbox"/> <input type="checkbox"/>

**Edit** ✕


**VLAN**

**IPv4\_ACL**

**MAC\_ACL**

Total 19 < 1 2 > 10/page Go to

Speed limit group settings:

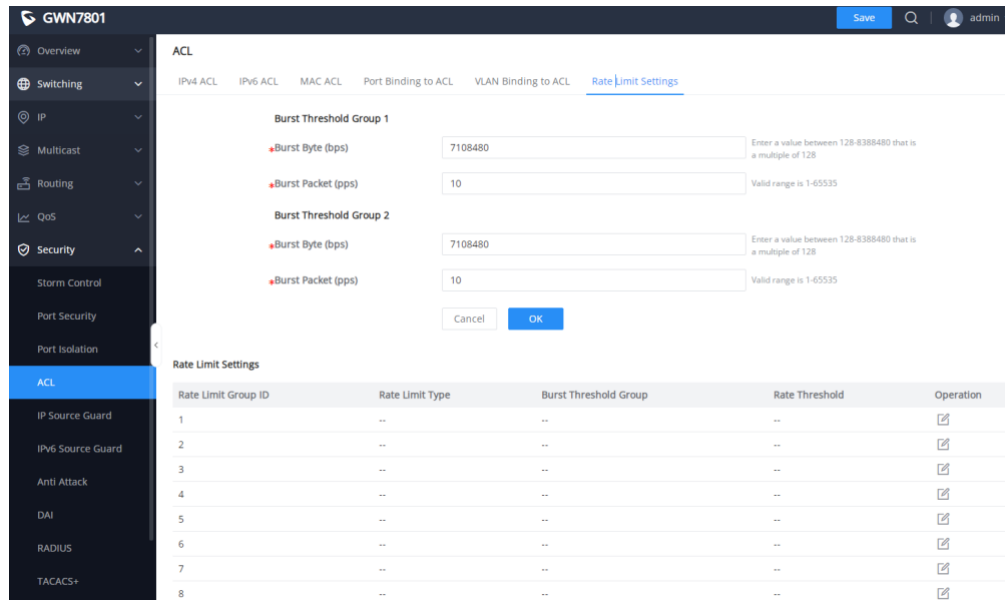

**ACL**

IPV4 ACL   IPV6 ACL   MAC ACL   Port Binding to ACL   VLAN Binding to ACL   Rate Limit Settings

**Burst Threshold Group 1**

- Burst Byte (bps): 7108480 (Enter a value between 128-8388480 that is a multiple of 128)
- Burst Packet (pps): 10 (Valid range is 1-65535)

**Burst Threshold Group 2**


- Burst Byte (bps): 7108480 (Enter a value between 128-8388480 that is a multiple of 128)
- Burst Packet (pps): 10 (Valid range is 1-65535)

Cancel   **OK**

**Rate Limit Settings**

Rate Limit Group ID	Rate Limit Type	Burst Threshold Group	Rate Threshold	Operation
1	--	--	--	<input checked="" type="checkbox"/>
2	--	--	--	<input checked="" type="checkbox"/>
3	--	--	--	<input checked="" type="checkbox"/>
4	--	--	--	<input checked="" type="checkbox"/>
5	--	--	--	<input checked="" type="checkbox"/>
6	--	--	--	<input checked="" type="checkbox"/>
7	--	--	--	<input checked="" type="checkbox"/>
8	--	--	--	<input checked="" type="checkbox"/>

- **Add import/export IPSG binding table for IP Source Guard**

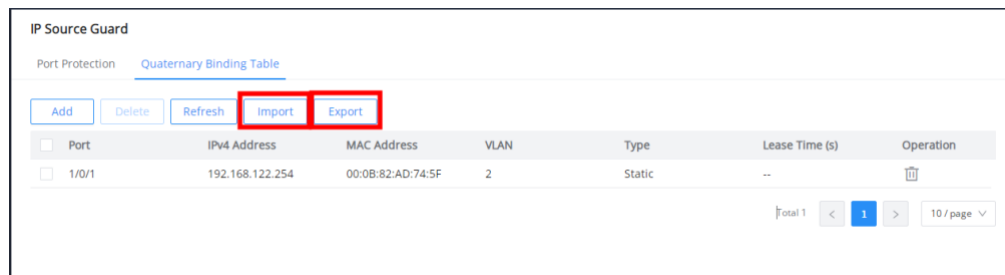

**IP Source Guard**

Port Protection   Quaternary Binding Table

Add   Delete   Refresh   **Import**   **Export**


Port	IPv4 Address	MAC Address	VLAN	Type	Lease Time (s)	Operation
<input type="checkbox"/> 1/0/1	192.168.122.254	00:08:82:AD:74:5F	2	Static	--	<input type="checkbox"/> <input checked="" type="checkbox"/>

Total 1   < 1 >   10 / page

- **Add IPv6 Source Guard**

IPv6 source attack protection is a source IPv6 address filtering technology based on the Layer 2 interface. It can prevent malicious hosts from forging the IPv6 addresses of legitimate hosts to impersonate legitimate hosts and ensure that unauthorized hosts cannot access or attack the network by setting their own IPv6 addresses.

IPv6SG uses the binding table (source IPv6 address, source MAC address, VLAN, and inbound interface binding) to match and check the IPv6 packets received on the Layer 2 interface. Only packets that match the binding table are allowed to pass, and other packets will be discarded.

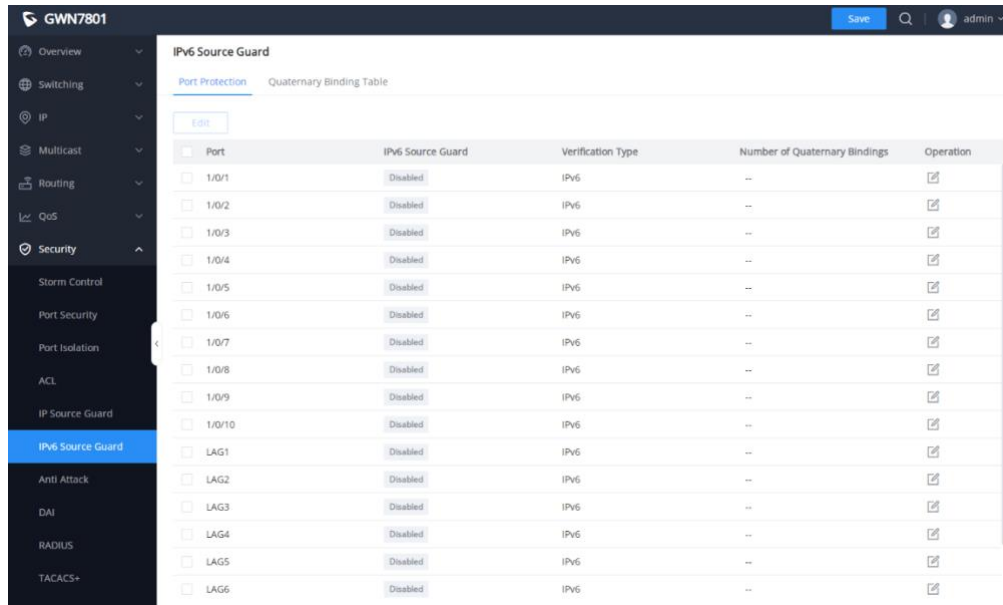


The screenshot shows the IPv6 Source Guard configuration page in the GWN7801 web interface. The left sidebar is expanded to 'Security' > 'IPv6 Source Guard'. The main content area has two tabs: 'Port Protection' (selected) and 'Quaternary Binding Table'. Below the tabs is an 'Edit' button and a table with the following columns: Port, IPv6 Source Guard, Verification Type, Number of Quaternary Bindings, and Operation.

Port	IPv6 Source Guard	Verification Type	Number of Quaternary Bindings	Operation
<input type="checkbox"/> 1/0/1	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> 1/0/2	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> 1/0/3	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> 1/0/4	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> 1/0/5	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> 1/0/6	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> 1/0/7	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> 1/0/8	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> 1/0/9	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> 1/0/10	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> LAG1	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> LAG2	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> LAG3	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> LAG4	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> LAG5	Disabled	IPv6	--	<a href="#">✎</a>
<input type="checkbox"/> LAG6	Disabled	IPv6	--	<a href="#">✎</a>

- **Add MAC bypass authentication**

In addition to the previously supported 802.1X authentication, identity authentication management now supports MAC authentication.

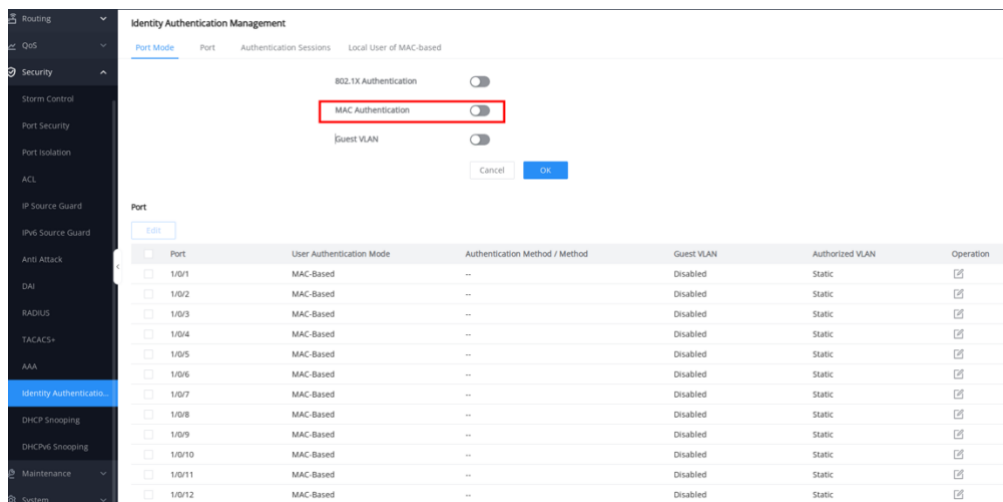


The screenshot shows the Identity Authentication Management configuration page. The left sidebar is expanded to 'Security' > 'Identity Authentication'. The main content area has four tabs: 'Port Mode' (selected), 'Port', 'Authentication Sessions', and 'Local User of MAC-based'. Under 'Port Mode', there are three toggle switches: '802.1X Authentication' (disabled), 'MAC Authentication' (highlighted with a red box and enabled), and 'Guest VLAN' (disabled). Below the toggles are 'Cancel' and 'OK' buttons. Below the configuration area is a 'Port' section with an 'Edit' button and a table with the following columns: Port, User Authentication Mode, Authentication Method / Method, Guest VLAN, Authorized VLAN, and Operation.


Port	User Authentication Mode	Authentication Method / Method	Guest VLAN	Authorized VLAN	Operation
<input type="checkbox"/> 1/0/1	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/2	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/3	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/4	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/5	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/6	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/7	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/8	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/9	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/10	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/11	MAC-Based	--	Disabled	Static	<a href="#">✎</a>
<input type="checkbox"/> 1/0/12	MAC-Based	--	Disabled	Static	<a href="#">✎</a>

MAC authentication has been added to the port authentication method, and the authentication methods support RADIUS and Local.

By default, the order of port authentication methods is 802.1X, MAC, and the order of authentication methods is RADIUS, Local.

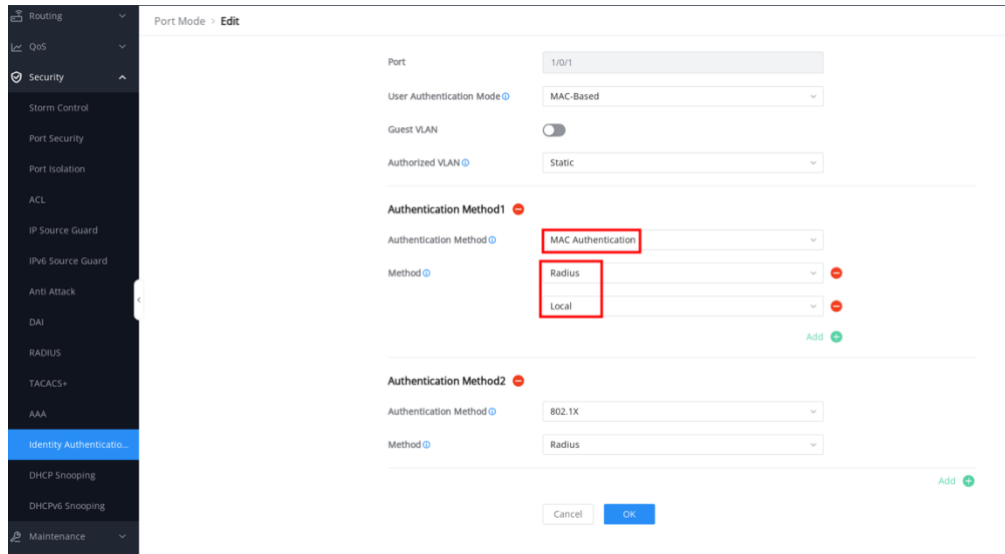


To add a MAC-based local user, you need to add the MAC address, port control mode, VLAN authorized for use after authentication, re-authentication time, and inactive time.

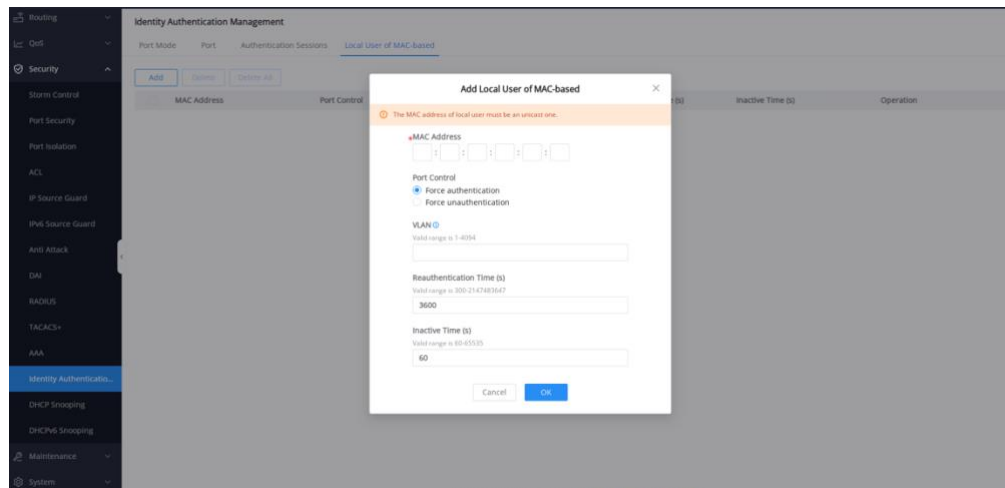

- **Optimize remote ID and Circuit ID for DHCP Snooping**


The Remote ID and Circuit ID of Option 82 can be configured in standard format and private format. Standard format: The default format is set according to TLV (type-length-value).

Private format: Only Value is used for setting.

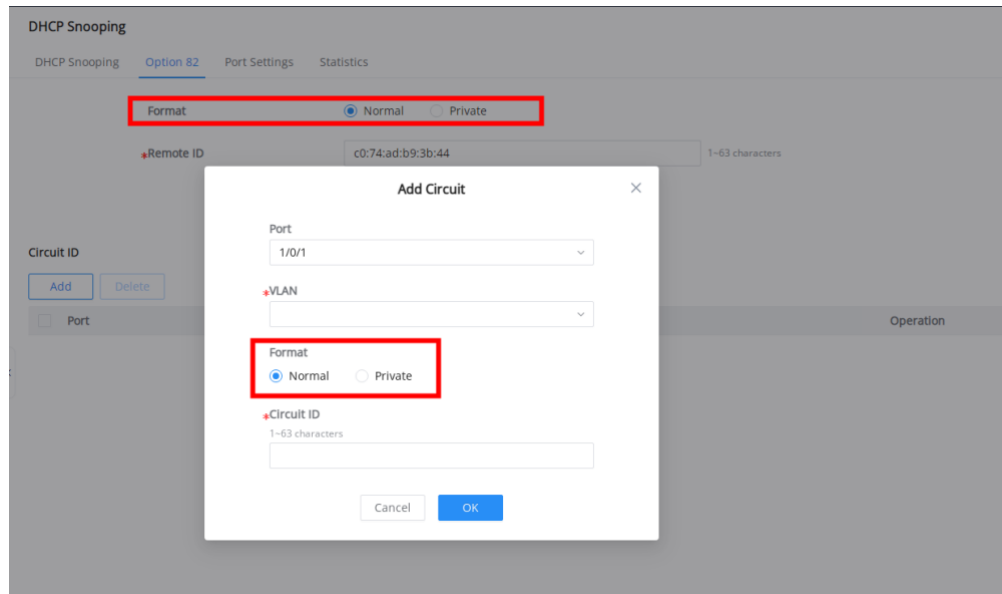

- **Add DHCPv6 Snooping**

It is used to ensure that the client obtains an IPv6 address or IPv6 prefix from a valid server and can record the correspondence between the DHCPv6 client IPv6 address or IPv6 prefix and the MAC address.

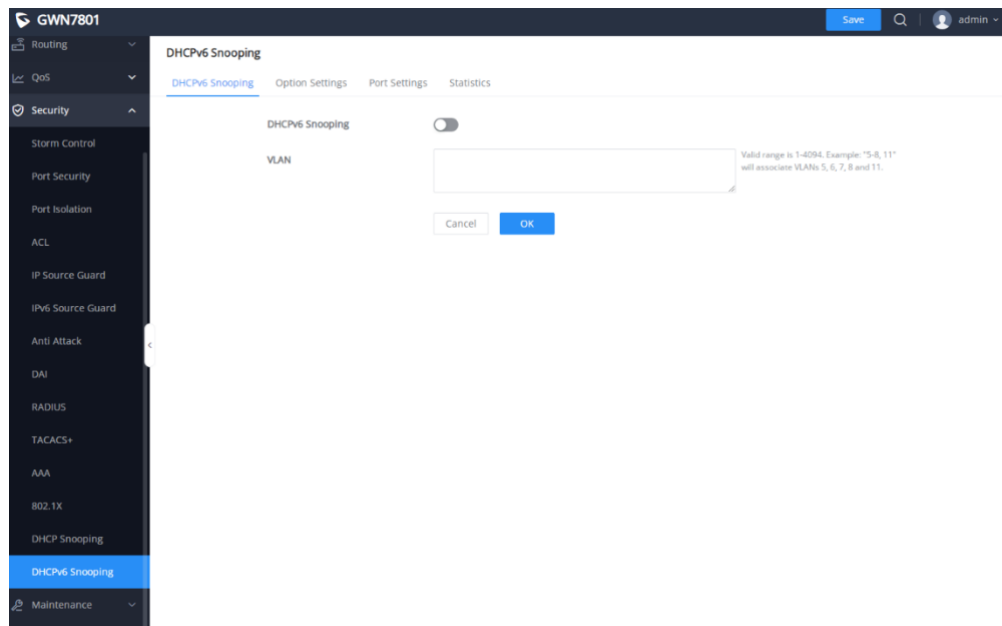

- **Add upgrade by FTP and Explicit FTPS**

Network upgrade supports FTP and explicit FTPS. Firmware detection and upgrade are performed by filling in the FTP or explicit FTPS firmware server address.

It also supports DHCP Option to carry FTP or explicit FTPS server address. The device reads and parses it and uses this address for upgrade.

Note: ftp:// protocol header refers to FTP upgrade method, and ftps:// protocol header refers to FTPS upgrade method.

Upgrade

---

Current version: 1.0.5.2

**Upgrade via Manual Upload**

Upload Firmware File to Update  Supported file formats: bin

**Upgrade via Network**

Allow DHCP Option 43/160/66 to Override Server

Firmware Upgrade Protocol 

- TFTP
- HTTP
- HTTPS
- FTP**
- Explicit FTPS**

Firmware Server Path

FTP/Explicit FTPS/HTTP/HTTPS Username

FTP/Explicit FTPS/HTTP/HTTPS Password


Check/Download New Firmware at Bootup

Scheduled Upgrade  Once enabled, the switch will automatically detect and upgrade within the scheduled time

- **Add connection diagnostics with GWN.Cloud/Manager**


When the switch and GWN.Cloud/GWN Manager connection is unstable, the user can log in to the local Web GUI diagnostic page to check the cloud connection status and view related logs.



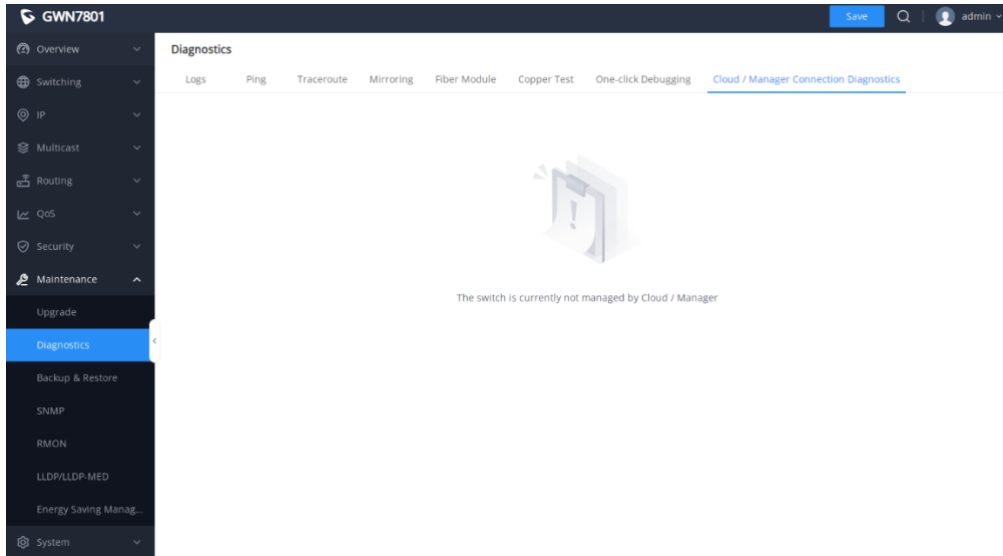


- **Optimize EEE**

Added actual port status display.

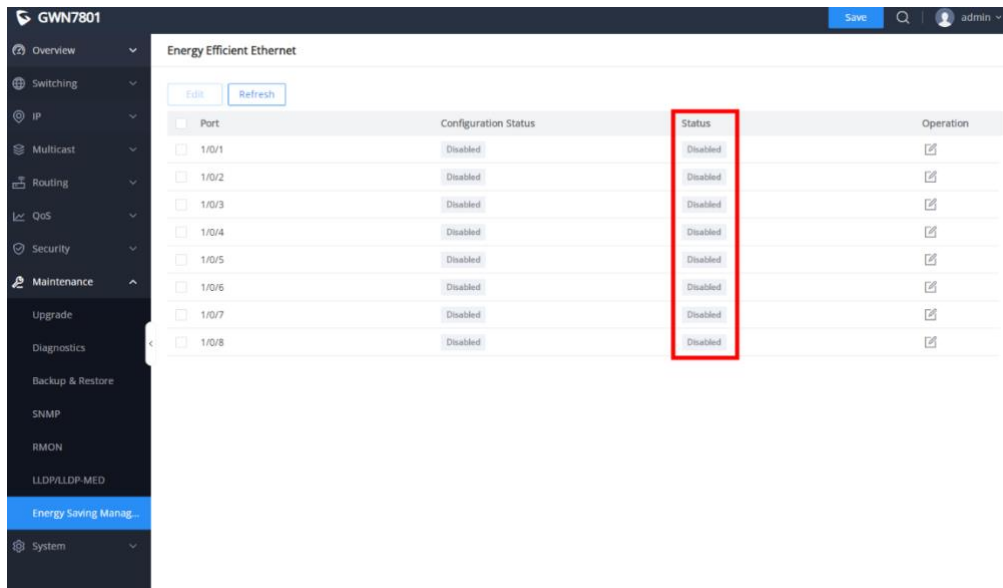


- **Add DST mode for time settings**

Added daylight saving time offset setting and automated time configuration.

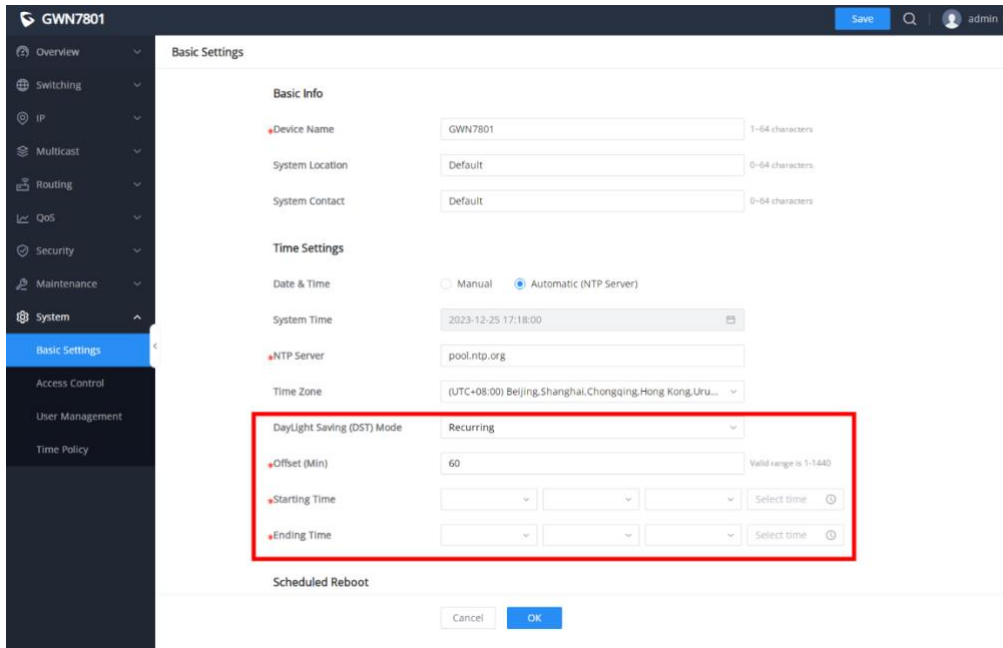


- **Add HTTPS/SSH port customization**

Users use customized HTTPS and SSH ports to access and configure device.

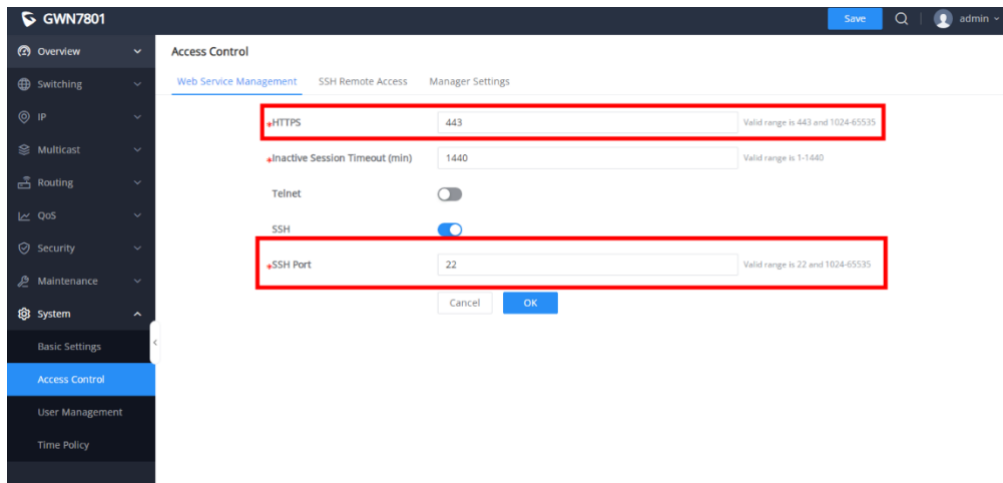

- **Optimize Manager settings**

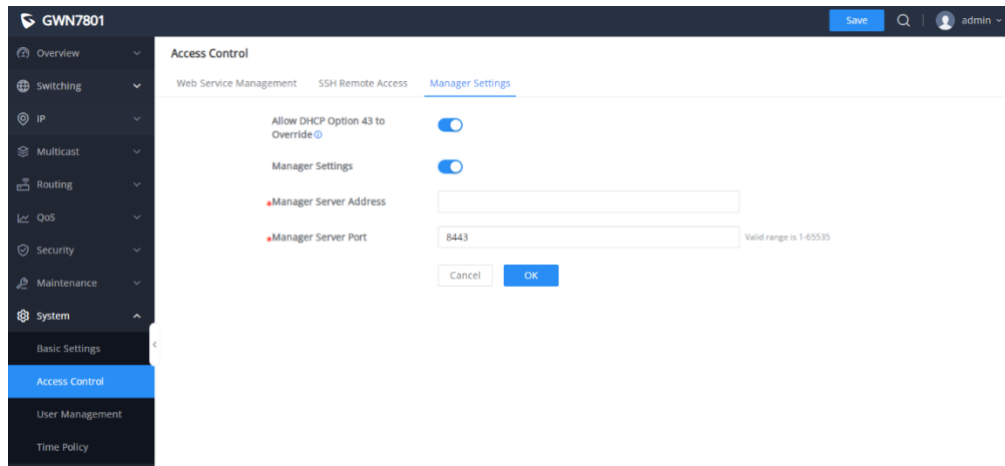

- **Add GWN Manager takeover function**

When GWN Manager wants to take over a managed switch, it can force the takeover by entering the switch password.

## FIRMWARE VERSION 1.0.3.37

### PRODUCT NAME

GWN7801(P) / GWN7802(P) / GWN7803(P)

### DATE

10/30/2023

### FIRMWARE FILE INFORMATION

- GWN780x Firmware file name: gwn780xfw.bin  
MD5 checksum: f32b7e5265d345f4fd357fdb33b434ab

### CHANGES/ENHANCEMENT

- Added support for GWN Cloud 1.1.25.23.
- Optimized CPU usage.
- Added support of SSH and TELNET in # mode.
- Added support of Dynamic Voice VLAN.
- Added support of voice VLAN OUI untagged mode.
- Added support of EXEC CLI config commands by GWN Cloud.
- Added support of backspace when using CLI.
- Fixed an issue that GWN7803P randomly get stuck.
- Fixed an issue that when configure two radius servers, after entering a wrong account, it will repeatedly ask to enter the account password, and the authentication status will not enter the lock state.
- Fixed an issue that after restarting, the path cost in the PVST port settings will become to the default value.
- Fixed an SSH issue that it lost the management IP address after changing the management IP address from DHCP to static.
- Fixed an LLDP/LLDP-MED issue that after restarting the device, the automatic voice network policy will be turned off.

- Fixed some issues related to Spanning Tree feature.
- Fixed some GWN Cloud related issues.
- Fixed some GWN Manager related issues.
- Improved some strings and translations.
- Internal bug fixes.

## FIRMWARE VERSION 1.0.3.19

### PRODUCT NAME

GWN7801(P) / GWN7802(P) / GWN7803(P)

### DATE

6/15/2023

### FIRMWARE FILE INFORMATION

- GWN780x Firmware file name: gwn780xfw.bin  
MD5 checksum: 9d77cf78b454a26c22216e20c78afbde

### CHANGES/ENHANCEMENT

- Added feature of IPv6 RA, RS.
- Added feature of DHCP server.
- Added feature of DHCP relay.
- Added feature of ARP table.
- Added feature of routing table.
- Added feature of static routing.
- Added feature of time scheduling.
- Added feature of one key debugging.
- Added feature of copper test.
- Added support of port based enable/disable in QoS port priority.
- Added support of SP-WRR and SP-WFQ to queue policy of QoS.
- Added support of neighbor discovery.
- Added support of VPN IP interface configuration.
- Added support of switch IP interface DNS configuration.
- Added support of mDNS discovery.

- Added support of fan status to system information.
- Added support of ErrDisable status to port information.
- Added support of EEE.
- Added support of SSH/Telnet client.
- Added support of SSH remote access.
- Added support of Layer 2 and Layer 3 GWN Manager discovery.
- Optimized port information display.
- Optimized port power limitation for PoE models.
- Fixed an issue causing high CPU load.
- Internal bug fixes.

## FIRMWARE VERSION 1.0.1.36

### PRODUCT NAME

GWN7801(P) / GWN7802(P) / GWN7803(P)

### DATE

4/18/2023

### FIRMWARE FILE INFORMATION

- GWN780x Firmware file name: gwn780xfw.bin  
MD5 checksum: 44a95a0d0610cce7e2aa8ebdc7057c29

### CHANGES/ENHANCEMENT

- Added DNS configurations for switch IP service.
- Fixed some webUI display issues.
- Fixed an issue which causes core file when creating a user with username longer than 32 characters.
- Fixed an issue that after VLAN is removed from a port, the PVID will not be automatically restored.
- Fixed an issue that causes monitor user lost.
- Fixed an issue of CLI command “show tech-support” causing long loading.
- Fixed an issue that port status display incorrectly when shutdown by loop detection.
- Fixed an issue that illegal NTP server settings cause boot abnormal.
- Internal bug fixes.



## FIRMWARE VERSION 1.0.1.30

### PRODUCT NAME

GWN7801(P) / GWN7802(P) / GWN7803(P)

### DATE

2/7/2023

### FIRMWARE FILE INFORMATION

- GWN780x Firmware file name: gwn780xfw.bin  
MD5 checksum: 6c24de94be8f8b1ecb1884aae02aabed

### CHANGES/ENHANCEMENT

- Added
- Fixed the issue that GWN781x OSPF sometimes configuration loss after modifying the area, also added error prompt when the key character range is exceeded.
- Fixed the issue that after deleted a static NDP, it cannot re-create it.
- Fixed the issue that after unplugging ethernet cable on static IP interface, the IP address would change to 0.0.0.0.
- Fixed the issue that in very rare conditions that the device might automatically restart.
- Fixed the issue that when IPSG is enabled, sender with IP 0.0.0.0 still has ARP probe packets dropped.
- Fixed the issue that Time Policy allow create new policy with exist names.
- Fixed the issue that the switch obtains an ipv6 address stateless, but after the interface is down, the ipv6 address is still present.
- Fixed the issue that Neighbor Discovery query results for the web and CLI are incorrect.
- Fixed the issue that if OSPF key mode is set to md5, the key cannot be saved n plain text, and an error message is displayed.
- Fixed some issues when work with GWN Cloud.

- Internal bug fixes.

## FIRMWARE VERSION 1.0.1.20

### PRODUCT NAME

GWN7801(P) / GWN7802(P) / GWN7803(P)

### DATE

12/7/2022

### FIRMWARE FILE INFORMATION

- GWN780x Firmware file name: gwn780xfw.bin  
MD5 checksum: 4744afc107d6ca02b8e085a13c394eb3

### CHANGES/ENHANCEMENT

- This is the first release of GWN780x.