

# **GRP2610/2610P/2611G/2612/2612P/2612W/2612G/2613/2613W /2614/2615/2616/ 2624/2634/2636/2650/2670**

## **Firmware Release Notes**

### **IMPORTANT UPGRADING NOTES**

- Starting with firmware 1.0.15.x+, the firmware will be split to “grp26xxafw.bin” and “grp26xxbfw.bin”, where “grp26xxafw.bin” is for GRP2610/2611G/2612/2612W/2613 and “grp26xxbfw.bin” is for GRP2613W/2614/2615/2616/262x/263x/265x/267x.
- Downgrading from firmware 1.0.15.x to 1.0.13.x or older firmware requires restoring devices' previous firmware's backup files. Otherwise, some of the configuration may be lost after downgrading to 1.0.13.x or older as some of the data structure changed in 1.0.15.x. Therefore, before upgrading to 1.0.15.x, please make sure to perform manual backup via the phone's webUI and save the backup file first. If you prefer to downgrade later, you will need to use this backup file to manually restore the phone's configuration and data. Please refer to 1.0.15.8 release notes “Important Notes” section for instructions.
- In order to upgrade from firmware 1.0.13.127 or earlier to 1.0.15.1+, you need to first upgrade to transition firmware 1.0.15.0.
- Upgrading to 1.0.15.x+ may cause saved Certificates/CAs to be lost, it is recommended to create a backup and upload the backup after upgrading.
- Firmware 1.0.15.x+ will not be supported on legacy hardware.
- Legacy hardware discontinued after 2020 (hereafter referred as “legacy hardware”) includes older GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, and GRP2616 phones; only phones of the above model whose hardware revision starts with 1 are legacy hardware. Please refer to the product label at the back of the phone, if the PN is 962-NNNNN-XNN where X is 1 it is legacy hardware. All GRP2610, GRP2610P, GRP2611G, GRP2612G, GRP2613W, GRP2624, GRP2634, GRP2636, GRP2650, and GRP2670 are current hardware (not legacy hardware).
- The first time you perform an upgrade from 1.0.9.x to 1.0.11.9+, the phone will first upgrade to 2.0.11.x and then upgrade to 1.0.11.x. This process is automatic when upgrading to 1.0.11.x, so if you see 2.0.11.x as the alternative firmware, you can ignore it. For all future upgrades afterwards, it will upgrade directly to 1.0.11.x. (Except legacy hardware).
- When downgrading from 1.0.11.x back to 1.0.9.141 or lower via firmware server, the device will need to reboot twice before completing the downgrade to 1.0.9.141 (Except legacy hardware).
- Devices on firmware 1.0.9.x or below cannot upgrade to firmware 1.0.11.9+ directly through WebUI.

Please refer to [APPENDIX A: PREVIOUS UPGRADING NOTES] section for previous upgrading notes.

## Table of Contents

|                                                   |           |
|---------------------------------------------------|-----------|
| <b>IMPORTANT UPGRADING NOTES.....</b>             | <b>1</b>  |
| <b>FIRMWARE VERSION 1.0.15.8 .....</b>            | <b>10</b> |
| PRODUCT NAME .....                                | 10        |
| DATE .....                                        | 10        |
| FIRMWARE FILE INFORMATION .....                   | 10        |
| IMPORTANT NOTES .....                             | 10        |
| ENHANCEMENT.....                                  | 11        |
| BUG FIX .....                                     | 12        |
| KNOWN ISSUES .....                                | 12        |
| NOTES .....                                       | 12        |
| NEW FEATURE OVERVIEW .....                        | 12        |
| <i>ENLARGE FONT SIZE</i> .....                    | 12        |
| <i>PROGRAMMABLE NUMBER KEYS</i> .....             | 13        |
| <i>ALLOW ACROSS REBOOTS</i> .....                 | 14        |
| <i>AUTO-ANSWER TONE GAIN</i> .....                | 14        |
| <i>ENABLE DTMF TONE SPEAKER</i> .....             | 15        |
| WPA3.....                                         | 15        |
| TLS1.3.....                                       | 17        |
| <b>FIRMWARE VERSION 1.0.13.127 .....</b>          | <b>18</b> |
| PRODUCT NAME .....                                | 18        |
| DATE .....                                        | 18        |
| FIRMWARE FILE INFORMATION .....                   | 18        |
| ENHANCEMENT.....                                  | 18        |
| BUG FIX .....                                     | 18        |
| KNOWN ISSUES .....                                | 18        |
| <b>FIRMWARE VERSION 1.0.13.122 .....</b>          | <b>19</b> |
| PRODUCT NAME .....                                | 19        |
| DATE .....                                        | 19        |
| FIRMWARE FILE INFORMATION .....                   | 19        |
| BUG FIX .....                                     | 19        |
| KNOWN ISSUES .....                                | 19        |
| <b>FIRMWARE VERSION 1.0.13.119(REMOVED) .....</b> | <b>20</b> |
| PRODUCT NAME .....                                | 20        |
| DATE .....                                        | 20        |
| FIRMWARE FILE INFORMATION .....                   | 20        |
| ENHANCEMENT.....                                  | 20        |
| BUG FIX .....                                     | 20        |
| KNOWN ISSUES .....                                | 21        |
| NEW FEATURE OVERVIEW .....                        | 21        |
| <i>DTMF TONE DURATION</i> .....                   | 21        |
| <i>GEOLOCATION HEADER FORMAT</i> .....            | 22        |
| <i>REGISTER RETRY ON 403</i> .....                | 22        |
| <i>PRESERVE DND STATUS</i> .....                  | 22        |
| <i>CHECK-SYNC REBOOT</i> .....                    | 23        |
| <b>FIRMWARE VERSION 1.0.13.59 .....</b>           | <b>24</b> |
| PRODUCT NAME .....                                | 24        |
| DATE .....                                        | 24        |
| FIRMWARE FILE INFORMATION .....                   | 24        |
| ENHANCEMENT.....                                  | 24        |
| BUG FIX .....                                     | 24        |
| KNOWN ISSUES .....                                | 25        |

|                                         |           |
|-----------------------------------------|-----------|
| NEW FEATURE OVERVIEW .....              | 25        |
| NOISE SUPPRESSION MODE .....            | 25        |
| GROUP LISTEN WITH HANDSET .....         | 26        |
| MULTICAST LISTENER VPK .....            | 26        |
| CUSTOM IDLE SOFTKEYS 4-6 .....          | 27        |
| SILENT SERVER CALL FEATURE .....        | 28        |
| SHOW FULL DATE ON STATUS BAR .....      | 29        |
| ALERT-INFO BELLCORE MAPPING .....       | 29        |
| CALL FLIP WITH UCM.....                 | 30        |
| <b>FIRMWARE VERSION 1.0.13.31 .....</b> | <b>31</b> |
| PRODUCT NAME .....                      | 31        |
| DATE .....                              | 31        |
| FIRMWARE FILE INFORMATION .....         | 31        |
| ENHANCEMENT .....                       | 31        |
| BUG FIX .....                           | 31        |
| KNOWN ISSUES .....                      | 32        |
| NEW FEATURE OVERVIEW .....              | 32        |
| IGNORE DIVERSION HEADER .....           | 32        |
| <b>FIRMWARE VERSION 1.0.13.21 .....</b> | <b>33</b> |
| PRODUCT NAME .....                      | 33        |
| DATE .....                              | 33        |
| FIRMWARE FILE INFORMATION .....         | 33        |
| ENHANCEMENT .....                       | 33        |
| BUG FIX .....                           | 34        |
| KNOWN ISSUES .....                      | 35        |
| NEW FEATURE OVERVIEW .....              | 35        |
| MULTIPLE CUSTOM CONFIG .....            | 35        |
| EARLY MEDIA.....                        | 35        |
| FILTER CHARACTERS .....                 | 39        |
| PARTIAL CHARACTER LOOKUP .....          | 39        |
| CUSTOMIZED STATION LABEL .....          | 40        |
| OPENVPN CLIENT KEY PASSWORD .....       | 40        |
| SCHEDULED TASKS.....                    | 41        |
| PUSH-TO-TALK .....                      | 42        |
| POP-UP HIDDEN SETTINGS.....             | 42        |
| LDAP SRV LOOKUP.....                    | 43        |
| MULTICAST CALL TIMEOUT .....            | 43        |
| HIDDEN NUMBER PLAN.....                 | 44        |
| TRANSFER TO VM FEATURE CODE.....        | 49        |
| ENHANCED CALL PARK.....                 | 51        |
| HIDE BT AND WIFI .....                  | 52        |
| DTMF TONE GAIN.....                     | 52        |
| WIFI SSID SETTINGS .....                | 53        |
| RINGTONE SOFT RESET.....                | 53        |
| OPENVPN FAILOVER .....                  | 54        |
| <b>FIRMWARE VERSION 1.0.11.23 .....</b> | <b>55</b> |
| PRODUCT NAME .....                      | 55        |
| DATE .....                              | 55        |
| FIRMWARE FILE INFORMATION .....         | 55        |
| ENHANCEMENT .....                       | 55        |
| BUG FIX .....                           | 55        |
| NEW FEATURE OVERVIEW .....              | 55        |
| SYSLOG HEADER FORMAT.....               | 55        |
| MANAGEMENT INTERFACE .....              | 56        |

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>FIRMWARE VERSION 1.0.11.18 .....</b>                         | <b>60</b> |
| PRODUCT NAME .....                                              | 60        |
| DATE .....                                                      | 60        |
| FIRMWARE FILE INFORMATION .....                                 | 60        |
| ENHANCEMENT .....                                               | 60        |
| BUG FIX .....                                                   | 60        |
| <b>FIRMWARE VERSION 1.0.11.15 .....</b>                         | <b>61</b> |
| PRODUCT NAME .....                                              | 61        |
| DATE .....                                                      | 61        |
| FIRMWARE FILE INFORMATION .....                                 | 61        |
| BUG FIX .....                                                   | 61        |
| <b>FIRMWARE VERSION 1.0.11.11 (REPLACED BY 1.0.11.15) .....</b> | <b>62</b> |
| PRODUCT NAME .....                                              | 62        |
| DATE .....                                                      | 62        |
| FIRMWARE FILE INFORMATION .....                                 | 62        |
| ENHANCEMENT .....                                               | 62        |
| BUG FIX .....                                                   | 62        |
| KNOWN ISSUES .....                                              | 62        |
| <b>FIRMWARE VERSION 1.0.11.10 (REPLACED BY 1.0.11.15) .....</b> | <b>63</b> |
| PRODUCT NAME .....                                              | 63        |
| DATE .....                                                      | 63        |
| FIRMWARE FILE INFORMATION .....                                 | 63        |
| ENHANCEMENT .....                                               | 63        |
| BUG FIX .....                                                   | 63        |
| KNOWN ISSUES .....                                              | 63        |
| NEW FEATURE OVERVIEW .....                                      | 63        |
| <i>VPK PAGING AUTO RETURN TIMEOUT</i> .....                     | 63        |
| <b>FIRMWARE VERSION 1.0.9.141 .....</b>                         | <b>65</b> |
| PRODUCT NAME .....                                              | 65        |
| DATE .....                                                      | 65        |
| FIRMWARE FILE INFORMATION .....                                 | 65        |
| ENHANCEMENT .....                                               | 65        |
| BUG FIX .....                                                   | 65        |
| KNOWN ISSUES .....                                              | 65        |
| NEW FEATURE OVERVIEW .....                                      | 65        |
| <i>REMOTE RINGTONE DOWNLOAD TIMEOUT</i> .....                   | 65        |
| <i>PRESENCE ENHANCEMENT</i> .....                               | 66        |
| <b>FIRMWARE VERSION 1.0.9.136 .....</b>                         | <b>67</b> |
| PRODUCT NAME .....                                              | 67        |
| DATE .....                                                      | 67        |
| FIRMWARE FILE INFORMATION .....                                 | 67        |
| ENHANCEMENT .....                                               | 67        |
| BUG FIX .....                                                   | 67        |
| KNOWN ISSUES .....                                              | 67        |
| NEW FEATURE OVERVIEW .....                                      | 67        |
| <i>XML APP AUTH</i> .....                                       | 67        |
| <i>DTMF TONE WHEN USING SPEAKERS</i> .....                      | 68        |
| <b>FIRMWARE VERSION 1.0.9.132 .....</b>                         | <b>69</b> |
| PRODUCT NAME .....                                              | 69        |
| DATE .....                                                      | 69        |
| FIRMWARE FILE INFORMATION .....                                 | 69        |
| ENHANCEMENT .....                                               | 69        |
| BUG FIX .....                                                   | 69        |

|                                                  |           |
|--------------------------------------------------|-----------|
| KNOWN ISSUES .....                               | 70        |
| NEW FEATURE OVERVIEW .....                       | 70        |
| <i>USB MPK</i> .....                             | 70        |
| <i>EXTENSION BOARD FONT SIZE</i> .....           | 71        |
| <i>AUTO VQ COLLECTOR ADDRESS</i> .....           | 71        |
| <i>STATIC DNS RECORDS</i> .....                  | 72        |
| <i>PRESERVE SYSLOG AFTER RESET</i> .....         | 74        |
| <b>FIRMWARE VERSION 1.0.9.103 .....</b>          | <b>75</b> |
| PRODUCT NAME .....                               | 75        |
| DATE .....                                       | 75        |
| FIRMWARE FILE INFORMATION .....                  | 75        |
| BUG FIX .....                                    | 75        |
| KNOWN ISSUES .....                               | 75        |
| <b>FIRMWARE VERSION 1.0.9.99 .....</b>           | <b>76</b> |
| PRODUCT NAME .....                               | 76        |
| DATE .....                                       | 76        |
| FIRMWARE FILE INFORMATION .....                  | 76        |
| ENHANCEMENT .....                                | 76        |
| BUG FIX .....                                    | 76        |
| KNOWN ISSUES .....                               | 77        |
| NEW FEATURE OVERVIEW .....                       | 77        |
| <i>TRUSTED DOMAIN NAME LIST</i> .....            | 77        |
| <i>ENABLE CALL RECORDING LCD INDICATOR</i> ..... | 78        |
| <i>JITTER BUFFER TARGET DELAY</i> .....          | 79        |
| <b>FIRMWARE VERSION 1.0.9.83 .....</b>           | <b>80</b> |
| PRODUCT NAME .....                               | 80        |
| DATE .....                                       | 80        |
| FIRMWARE FILE INFORMATION .....                  | 80        |
| ENHANCEMENT .....                                | 80        |
| BUG FIX .....                                    | 80        |
| KNOWN ISSUES .....                               | 81        |
| NEW FEATURE OVERVIEW .....                       | 81        |
| <i>DEFAULT INPUT METHOD</i> .....                | 81        |
| <i>DHCP 150/160/161</i> .....                    | 81        |
| <b>FIRMWARE VERSION 1.0.9.74 .....</b>           | <b>83</b> |
| PRODUCT NAME .....                               | 83        |
| DATE .....                                       | 83        |
| FIRMWARE FILE INFORMATION .....                  | 83        |
| ENHANCEMENT .....                                | 83        |
| BUG FIX .....                                    | 83        |
| KNOWN ISSUES .....                               | 85        |
| NEW FEATURE OVERVIEW .....                       | 85        |
| <i>ENERGY SAVING</i> .....                       | 85        |
| <i>MONITORED VOICEMAIL ACCESS NUMBER</i> .....   | 86        |
| <i>X-SWITCH-INFO</i> .....                       | 87        |
| <i>ENABLE PAGING CALL MODE</i> .....             | 88        |
| <i>LOGIN TIMEOUT</i> .....                       | 89        |
| <i>RELEASE DHCP ON REBOOT</i> .....              | 89        |
| <i>HAC</i> .....                                 | 90        |
| <b>FIRMWARE VERSION 1.0.9.22 .....</b>           | <b>91</b> |
| PRODUCT NAME .....                               | 91        |
| DATE .....                                       | 91        |
| FIRMWARE FILE INFORMATION .....                  | 91        |
| ENHANCEMENT .....                                | 91        |

|                                        |            |
|----------------------------------------|------------|
| BUG FIX .....                          | 91         |
| KNOWN ISSUES .....                     | 92         |
| NEW FEATURE OVERVIEW .....             | 92         |
| SSH PORT .....                         | 92         |
| XML APP AUTO LAUNCH .....              | 92         |
| <b>FIRMWARE VERSION 1.0.7.33 .....</b> | <b>94</b>  |
| PRODUCT NAME .....                     | 94         |
| DATE .....                             | 94         |
| FIRMWARE FILE INFORMATION .....        | 94         |
| ENHANCEMENT .....                      | 94         |
| BUG FIX .....                          | 94         |
| KNOWN ISSUES .....                     | 94         |
| NEW FEATURE OVERVIEW .....             | 94         |
| P-ASSERTED-IDENTITY .....              | 94         |
| <b>FIRMWARE VERSION 1.0.7.25 .....</b> | <b>96</b>  |
| PRODUCT NAME .....                     | 96         |
| DATE .....                             | 96         |
| FIRMWARE FILE INFORMATION .....        | 96         |
| ENHANCEMENT .....                      | 96         |
| BUG FIX .....                          | 96         |
| KNOWN ISSUES .....                     | 97         |
| NEW FEATURE OVERVIEW .....             | 97         |
| GROUP LISTEN .....                     | 97         |
| IGMP INTERVAL .....                    | 97         |
| <b>FIRMWARE VERSION 1.0.7.23 .....</b> | <b>99</b>  |
| PRODUCT NAME .....                     | 99         |
| DATE .....                             | 99         |
| FIRMWARE FILE INFORMATION .....        | 99         |
| BUG FIX .....                          | 99         |
| KNOWN ISSUES .....                     | 99         |
| <b>FIRMWARE VERSION 1.0.7.22 .....</b> | <b>100</b> |
| PRODUCT NAME .....                     | 100        |
| DATE .....                             | 100        |
| FIRMWARE FILE INFORMATION .....        | 100        |
| ENHANCEMENT .....                      | 100        |
| BUG FIX .....                          | 100        |
| KNOWN ISSUES .....                     | 100        |
| NEW FEATURE OVERVIEW .....             | 100        |
| CALL PARK FEATURE CODES .....          | 100        |
| OPENVPN CFG .....                      | 102        |
| <b>FIRMWARE VERSION 1.0.7.19 .....</b> | <b>103</b> |
| PRODUCT NAME .....                     | 103        |
| DATE .....                             | 103        |
| FIRMWARE FILE INFORMATION .....        | 103        |
| ENHANCEMENT .....                      | 103        |
| BUG FIX .....                          | 103        |
| KNOWN ISSUES .....                     | 104        |
| NEW FEATURE OVERVIEW .....             | 104        |
| E911 SERVICE .....                     | 104        |
| <b>FIRMWARE VERSION 1.0.5.93 .....</b> | <b>108</b> |
| PRODUCT NAME .....                     | 108        |
| DATE .....                             | 108        |
| FIRMWARE FILE INFORMATION .....        | 108        |

|                                                |            |
|------------------------------------------------|------------|
| ENHANCEMENT .....                              | 108        |
| BUG FIX .....                                  | 108        |
| KNOWN ISSUES .....                             | 109        |
| NEW FEATURE OVERVIEW .....                     | 109        |
| <i>AUTO ANSWER NUMBERS</i> .....               | 109        |
| <i>UCM CALL CENTER FAST LOGIN/LOGOUT</i> ..... | 110        |
| <i>CONTACT SOURCE PRIORITY</i> .....           | 111        |
| <b>FIRMWARE VERSION 1.0.5.67 .....</b>         | <b>112</b> |
| PRODUCT NAME .....                             | 112        |
| DATE .....                                     | 112        |
| FIRMWARE FILE INFORMATION .....                | 112        |
| ENHANCEMENT .....                              | 112        |
| BUG FIX .....                                  | 113        |
| KNOWN ISSUES .....                             | 114        |
| NEW FEATURE OVERVIEW .....                     | 115        |
| <i>SCREENSAVER VPK LED</i> .....               | 115        |
| <i>REPLACE DUPLICATE ITEMS</i> .....           | 115        |
| <i>USE ROUTE SET IN NOTIFY</i> .....           | 116        |
| <i>3 REMOTE PHONEBOOKS</i> .....               | 117        |
| <i>RTCP PORT SELECTION</i> .....               | 118        |
| <i>HEADSET NOISE SHIELD 2.0</i> .....          | 119        |
| <i>HANDSET NOISE SHIELD 2.0</i> .....          | 120        |
| <i>SHOW KEYS LABEL</i> .....                   | 120        |
| <i>BS CONTACTS DOWNLOAD LIMIT</i> .....        | 121        |
| <i>BS CONTACTS SEARCH LIMIT</i> .....          | 121        |
| <i>ALLOW MULTIPLE ACCOUNTS</i> .....           | 122        |
| <i>FACTORY RESET SECURITY LEVEL</i> .....      | 122        |
| <i>CUSTOMIZE IDLE SCREEN SOFTKEYS</i> .....    | 123        |
| KNOWN ISSUES .....                             | 123        |
| <b>FIRMWARE VERSION 1.0.5.48 .....</b>         | <b>124</b> |
| PRODUCT NAME .....                             | 124        |
| DATE .....                                     | 124        |
| FIRMWARE FILE INFORMATION .....                | 124        |
| ENHANCEMENT .....                              | 124        |
| BUG FIX .....                                  | 124        |
| KNOWN ISSUES .....                             | 124        |
| <b>FIRMWARE VERSION 1.0.5.45 .....</b>         | <b>125</b> |
| PRODUCT NAME .....                             | 125        |
| DATE .....                                     | 125        |
| FIRMWARE FILE INFORMATION .....                | 125        |
| BUG FIX .....                                  | 125        |
| KNOWN ISSUES .....                             | 125        |
| <b>FIRMWARE VERSION 1.0.5.44 .....</b>         | <b>126</b> |
| PRODUCT NAME .....                             | 126        |
| DATE .....                                     | 126        |
| FIRMWARE FILE INFORMATION .....                | 126        |
| BUG FIX .....                                  | 126        |
| KNOWN ISSUES .....                             | 126        |
| <b>FIRMWARE VERSION 1.0.5.36 .....</b>         | <b>127</b> |
| PRODUCT NAME .....                             | 127        |
| DATE .....                                     | 127        |
| FIRMWARE FILE INFORMATION .....                | 127        |
| ENHANCEMENT .....                              | 127        |
| BUG FIX .....                                  | 127        |

|                                                |            |
|------------------------------------------------|------------|
| KNOWN ISSUES .....                             | 127        |
| NEW FEATURE OVERVIEW .....                     | 127        |
| <i>POWER SAVING TIMEOUT</i> .....              | 127        |
| <i>OFFICE HOUR</i> .....                       | 128        |
| <b>FIRMWARE VERSION 1.0.5.33 .....</b>         | <b>130</b> |
| PRODUCT NAME .....                             | 130        |
| DATE .....                                     | 130        |
| FIRMWARE FILE INFORMATION .....                | 130        |
| ENHANCEMENT .....                              | 130        |
| BUG FIX .....                                  | 130        |
| KNOWN ISSUES .....                             | 131        |
| NEW FEATURE OVERVIEW .....                     | 131        |
| <i>BLACKLIST/WHITELIST WEB ACCESS</i> .....    | 131        |
| <i>SELECT ACCOUNT FROM LCD</i> .....           | 131        |
| <i>ENABLE RTCP</i> .....                       | 132        |
| <b>FIRMWARE VERSION 1.0.5.15 .....</b>         | <b>134</b> |
| PRODUCT NAME .....                             | 134        |
| DATE .....                                     | 134        |
| FIRMWARE FILE INFORMATION .....                | 134        |
| ENHANCEMENT .....                              | 134        |
| BUG FIX .....                                  | 134        |
| KNOWN ISSUES .....                             | 134        |
| NEW FEATURE OVERVIEW .....                     | 134        |
| <i>DEV.CFG</i> .....                           | 135        |
| <i>CALL TONE VOLUME</i> .....                  | 135        |
| <i>ENABLE EDRC FEATURE</i> .....               | 135        |
| <b>FIRMWARE VERSION 1.0.3.6 .....</b>          | <b>137</b> |
| PRODUCT NAME .....                             | 137        |
| DATE .....                                     | 137        |
| FIRMWARE FILE INFORMATION .....                | 137        |
| ENHANCEMENT .....                              | 137        |
| BUG FIX .....                                  | 137        |
| NEW FEATURE OVERVIEW .....                     | 137        |
| <i>EXACT MATCH SEARCH</i> .....                | 137        |
| <b>FIRMWARE VERSION 1.0.1.23 .....</b>         | <b>139</b> |
| PRODUCT NAME .....                             | 139        |
| DATE .....                                     | 139        |
| FIRMWARE FILE INFORMATION .....                | 139        |
| ENHANCEMENT .....                              | 139        |
| BUG FIX .....                                  | 139        |
| NEW FEATURE OVERVIEW .....                     | 139        |
| <i>REGISTER BEFORE DNS SRV FAIL-OVER</i> ..... | 139        |
| <b>FIRMWARE VERSION 1.0.1.17 .....</b>         | <b>141</b> |
| PRODUCT NAME .....                             | 141        |
| DATE .....                                     | 141        |
| FIRMWARE FILE INFORMATION .....                | 141        |
| ENHANCEMENT .....                              | 141        |
| BUG FIX .....                                  | 141        |
| NEW FEATURE OVERVIEW .....                     | 141        |
| <i>ADD MAC IN USER-AGENT</i> .....             | 141        |
| <b>FIRMWARE VERSION 1.0.1.7 .....</b>          | <b>143</b> |
| PRODUCT NAME .....                             | 143        |
| DATE .....                                     | 143        |

|                                                  |            |
|--------------------------------------------------|------------|
| FIRMWARE FILE INFORMATION .....                  | 143        |
| ENHANCEMENT .....                                | 143        |
| BUG FIX .....                                    | 143        |
| <b>FIRMWARE VERSION 1.0.0.31 .....</b>           | <b>144</b> |
| PRODUCT NAME .....                               | 144        |
| DATE .....                                       | 144        |
| FIRMWARE FILE INFORMATION .....                  | 144        |
| ENHANCEMENT .....                                | 144        |
| BUG FIX .....                                    | 145        |
| <b>APPENDIX A: PREVIOUS UPGRADING NOTES.....</b> | <b>146</b> |

## FIRMWARE VERSION 1.0.15.8

### PRODUCT NAME

GRP2610, GRP2610P, GRP2611G, GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2613W, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

*Boot 1.0.15.1; Core 1.0.15.1; Prog 1.0.15.8; CPE 1.0.5.42*

### DATE

08/09/2026

### FIRMWARE FILE INFORMATION

- GRP2610/2611/2612/2612W/2613 Firmware file name: grp26xxafw.bin  
MD5: fe0440c88762b06ec9ee65bcb7db57ff
- GRP2613W/2614/2615/2616/262x/263x/265x/267x Firmware file name: grp26xxbfw.bin  
MD5: 33d1fdf6f0bb50da5e74122b090c39e4

### IMPORTANT NOTES

Downgrading from firmware 1.0.15.x to 1.0.13.x or older firmware requires restoring devices' previous firmware's backup files. Otherwise, some of the configuration may be lost after downgrading to 1.0.13.x or older as some of the data structure changed in 1.0.15.x. Therefore, before upgrading to 1.0.15.x, please make sure to perform manual backup via the phone's webUI and save the backup file first. If you prefer to downgrade later, you will need to use this backup file to manually restore the phone's configuration and data.


Here are the steps to export phone's backup file before upgrading to 1.0.15.x:

1. Log in web UI and navigate to Maintenance->Upgrade and Provision->Config File and select "Export Backup Package" to download the backup .uf file.
2. Save the backup file and make sure to note which firmware this backup file is for.

If after upgrading to 1.0.15.x, you decide to downgrade to the previous firmware version, here are the steps to restore the phone's backup file:

1. Log in web UI and navigate to Maintenance->Upgrade and Provision->Config File, find the option "Restore from Backup Package".
2. Click on "Upload" to upload the backup .uf file.

Please refer to the screenshot for the backup/restore options on phone's web UI.

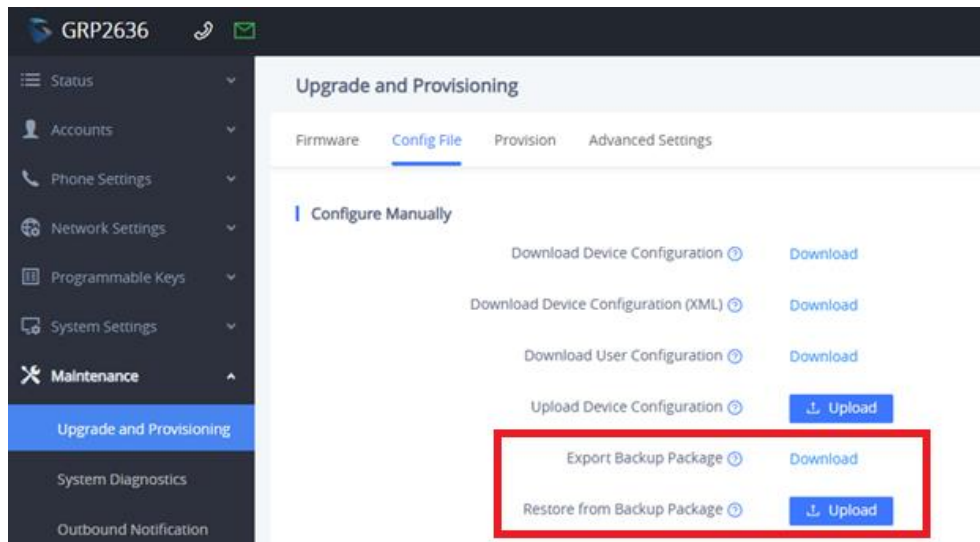

## ENHANCEMENT

- Improved performance on GRP2610(P)/GRP2611G/GRP2612(PW)/GRP2613
- Added “PC Port VLAN Tag” setting to LCD menu
- Improved Czech LCD translations
- Added support for French translations of the transfer softkeys
- Improved French softkey label translations
- Improved Wi-Fi security type naming
- Updated “Enable Local Features” options to use “Enabled/Disabled” instead of “Yes/No”
- Improved Public Mode pop-up string
- Added the ability to enlarge the font size on Idle, Dial, and Talking interfaces[ENLARGE FONT SIZE]
- Added ability to configure the keypad number keys to perform speed dial[PROGRAMMABLE NUMBER KEYS]
- Added support for obtaining BLF status via API
- Added support for allowing public mode login sessions to persist across reboots[ALLOW ACROSS REBOOTS]
- Added support for the “Call Features” softkey when Local Call Features is disabled and Feature Key Sync is enabled
- Added support for Auto-Answer Tone Gain[AUTO-ANSWER TONE GAIN]
- SSH is now disabled by default for improved security
- Added support for “Accept-Language” sip header in SIP 180/INVITE
- Added the ability to disable the local DTMF tones played when dialing in speaker mode[ENABLE DTMF TONE SPEAKER]
- Added WPA3 support (HW5 or higher models of GRP2613W and up only. If WPA2/WPA3 is selected on non-supporting hardware, WPA2 will be used)[WPA3]
- Added ability to perform early blind transfer with UCM server
- After connecting to wp\_master during a first-time boot, phones will now remain connected to it until the user replaces it with a different SSID
- Added TLS 1.3 support (GRP2613W and up only)[TLS1.3]
- After upgrading firmware, a pop-up will be displayed (all models) and a notification tone will be played (notification tone for GRP2613W and up only)
- After bootup, a pop-up will now be displayed (all models) and a notification tone will be played if the user has unread voicemail (notification tone for GRP2613W and up only)
- Upgraded various opensource packages to fix known vulnerabilities.

## BUG FIX

- Fixed an issue where the callee ID display wasn't updated after performing call pickup
- Fixed an issue where the phone keeps sending EAPOL Start messages when a Linux PC is connected to the PC port
- Fixed an issue where the setting "Register Before DNS SRV Failover" enabled could cause outgoing calls over IPv6 to fail on BroadSoft server
- Fixed an issue where the Auto Answer feature doesn't work with numbers that start with a "+" character
- Fixed an issue where the "RecordOn" softkey for Local Call Recording feature was displayed even though a USB device wasn't connected
- Fixed an issue where lock speaker volume wasn't always working
- Fixed an issue where Subscribe for BLF would fail on NetSapiens server if the Subscribe interval is too short
- Fixed an issue where the device was displaying the partially matched LDAP contact name
- Fixed an issue where 3CX Auto Provision wouldn't work when using IPv6
- Fixed an issue where BLF subscriptions would go on and off constantly after updating the NetSapiens server
- Fixed an issue where the system time would change to UTC+0 after reboot
- Fixed an issue where the caller ID number wasn't displayed in the call details screen
- Fixed an issue where long pressing MPK or EXT keys could result in the wrong key being selected
- Fixed an issue where "VPK Page Auto Return Timeout" wasn't working correctly
- Fixed an issue where the selected number wasn't dialed out after dialing the partially matched number and then pressing the Transfer hardkey
- Fixed an issue where the phone could run out of memory if you upload a large ringtone file on GRP2612/2613
- Fixed an issue where in some older hardware 802.11X Wi-Fi with EAP-TLS may not connect with larger certificates.

## KNOWN ISSUES

- external.cfg currently only supports 3 configs; this will be fixed in a future firmware.
- GDMS call quality statistics aren't being displayed properly on v2 phones; this will be fixed in a future firmware.

## NOTES

- Removed Hands-free Mode feature

## NEW FEATURE OVERVIEW

### ENLARGE FONT SIZE

#### Web Configuration

This option can be found under device web UI→System Settings→Preferences→Display Control→LCD

Enlarge Font Size ?



#### Functionality

Configures the phone to use a larger font size on Idle, Dial, and Talking interfaces.


## Pvalue

| Pvalue | Description                       | Value Range                                    | Default |
|--------|-----------------------------------|------------------------------------------------|---------|
| 8724   | <New Pvalue><br>Enlarge Font Size | 0-1<br>Value = 0; Disable<br>Value = 1; Enable | 0       |

## PROGRAMMABLE NUMBER KEYS

### Web Configuration

This option can be found under device web UI→Programmable Keys→Number Keys

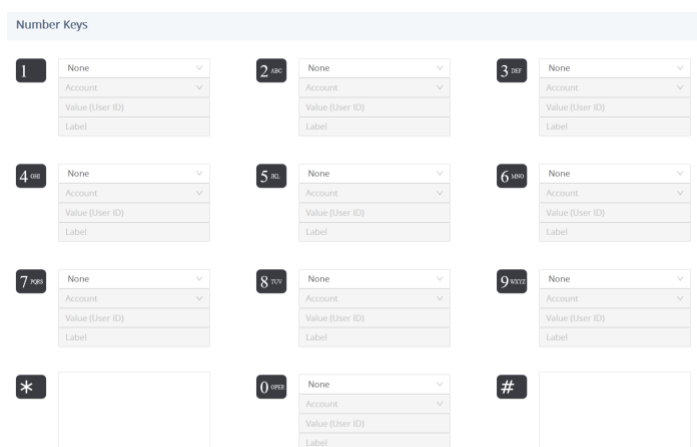

The screenshot displays the 'Number Keys' configuration interface. It features a grid of 12 key configuration boxes, each corresponding to a key on a numeric keypad (1-9, \*, #). Each box contains a dropdown menu with the following options: 'None', 'Account', 'Value (User ID)', and 'Label'. The 'None' option is currently selected for all keys.

### Functionality

Configures the keypad number keys to perform certain actions after holding on the key. Currently, only Speed Dial and Speed Dial via Active Account are supported.

## Pvalue

| Pvalue                          | Description                                  | Value Range                                    | Default |
|---------------------------------|----------------------------------------------|------------------------------------------------|---------|
| P8682, P8686, ..., P8714, P8718 | <New Pvalue><br>Keypad Key 0-9 – Key Mode    | 0-1<br>Value = 0; Disable<br>Value = 1; Enable | 0       |
| P8683, P8687, ..., P8715, P8719 | <New Pvalue><br>Keypad Key 0-9 – Account     | 0-15; Accounts 1-16                            | 0       |
| P8684, P8688, ..., P8716, P8720 | <New Pvalue><br>Keypad Key 0-9 – Description | String                                         |         |

|                                 |                                        |        |  |
|---------------------------------|----------------------------------------|--------|--|
| P8685, P8689, ..., P8717, P8721 | <New Pvalue><br>Keypad Key 0-9 – Value | String |  |
|---------------------------------|----------------------------------------|--------|--|

## ALLOW ACROSS REBOOTS

### Web Configuration

This option can be found under device web UI→Phone Settings→General Settings→Public Mode

Allow Across Reboots  ☐

### Functionality

Allows the public login session to persist across reboots.

### Pvalue

| Pvalue | Description                          | Value Range                                    | Default |
|--------|--------------------------------------|------------------------------------------------|---------|
| 8739   | <New Pvalue><br>Allow Across Reboots | 0-1<br>Value = 0; Disable<br>Value = 1; Enable | 0       |

## AUTO-ANSWER TONE GAIN

### Web Configuration

This option can be found under device web UI→Phone Settings→Ringtone

Auto-Answer Tone Gain  Medium 

### Functionality

Configures the auto-answer tone gain to adjust auto-answer tone volume.

### Pvalue

| Pvalue | Description                           | Value Range                                                                     | Default |
|--------|---------------------------------------|---------------------------------------------------------------------------------|---------|
| 22487  | <New Pvalue><br>Auto-Answer Tone Gain | 0-3<br>Value = 0; Off<br>Value = 1; Low<br>Value = 2; Medium<br>Value = 3; High | 2       |

## ENABLE DTMF TONE SPEAKER

### Web Configuration

This option can be found under device web UI→Phone Settings→Call Settings→Outgoing

Enable Local Dialing DTMF Tone in Speaker Mode  

### Functionality

Configures whether to play local DTMF tone during dialing when using the speaker.

### Pvalue

| Pvalue | Description                                                    | Value Range                            | Default |
|--------|----------------------------------------------------------------|----------------------------------------|---------|
| 22553  | <New Pvalue><br>Enable Local Dialing DTMF Tone in Speaker Mode | 0-1<br>Value = 0; No<br>Value = 1; Yes | 1       |

## WPA3

### Web Configuration

These options can be found under device web UI→Network Settings→Wi-Fi Settings→Add Network

## Add Network



ESSID

Security Mode

WPA/WPA2 Personal

None

WEP

**WPA/WPA2 Personal**

WPA2/WPA3 Personal

WPA3 Personal

WPA/WPA2 Enterprise

WPA2/WPA3 Enterprise

WPA3 Enterprise

Password

Hidden Wi-Fi

Network Priority

Advanced

Cancel

Connect

### Functionality

Can select various WPA3 security modes as an option when adding a Wi-Fi network.

### Pvalue

| Pvalue                          | Description                                        | Value Range                                                                                                                                                                                                     | Default |
|---------------------------------|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 83002, 83102, ..., 83802, 83902 | <New Pvalue><br>Access Points 1-10 - Security Type | 0-16<br>Value = 0; None<br>Value = 1; WEP<br>Value = 4;<br>WPA/WPA2 Personal<br>Value = 15;<br>WPA2/WPA3 Personal<br>Value = 11; WPA3 Personal<br>Value = 5;<br>WPA/WPA2 Enterprise<br>Value = 16;<br>WPA2/WPA3 | 4       |

|  |  |                                              |  |
|--|--|----------------------------------------------|--|
|  |  | Enterprise<br>Value = 12; WPA3<br>Enterprise |  |
|--|--|----------------------------------------------|--|

## TLS1.3

### Web Configuration

These options can be found under device web UI→System Settings→Security Settings→Client Certificate

Minimum TLS Version ?

TLS 1.3

Maximum TLS Version ?

TLS 1.3

### Functionality

Configures the phone's minimum or maximum supported TLS version; now includes TLS 1.3 as an option for both settings.

### Pvalue

| Pvalue | Description                         | Value Range                                                                                                                | Default |
|--------|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------|---------|
| P22293 | <New Pvalue><br>Minimum TLS Version | 10-13<br>Value = 10; TLS 1.0<br>Value = 11; TLS 1.1<br>Value = 12; TLS 1.2<br>Value = 13; TLS 1.3                          | 10      |
| P22294 | <New Pvalue><br>Maximum TLS Version | 10-99<br>Value = 10; TLS 1.0<br>Value = 11; TLS 1.1<br>Value = 12; TLS 1.2<br>Value = 13; TLS 1.3<br>Value = 99; Unlimited | 99      |

## FIRMWARE VERSION 1.0.13.127

### PRODUCT NAME

GRP2610, GRP2610P, GRP2611G, GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2613W, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

*Boot 1.0.13.1; Core 1.0.13.127; Prog 1.0.13.127; CPE 1.0.5.25*

### DATE

3/11/2026

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 683d040956fe9ccfb058ec25269b2818

### ENHANCEMENT

- Improved Turkish LCD strings
- Lowered the amount of time it takes to boot up after factory reset

### BUG FIX

- Fixed an issue where less common Chinese characters weren't being displayed properly on the LCD
- Fixed an issue where downloading the same XML phonebook would generate new contact IDs each time
- Fixed an issue where sometimes there was no popup when pressing a VPK and its configured account is unavailable
- Fixed an issue where the LCD would behave abnormally when call is attended transferred and ended at the same time when using NetSapiens server
- Fixed an issue where the PoE connection is prioritized over the WiFi connection even when the PoE connection has no network
- Fixed an issue on some devices where after reboot, the phone could lose its configuration

### KNOWN ISSUES

- external.cfg currently only supports 3 configs; this will be fixed in a future firmware.
- GDMS call quality statistics aren't being displayed properly on v2 phones; this will be fixed in a future firmware.

## FIRMWARE VERSION 1.0.13.122

### PRODUCT NAME

GRP2610, GRP2610P, GRP2611G, GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2613W, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

*Boot 1.0.13.1; Core 1.0.13.122; Prog 1.0.13.122; CPE 1.0.5.25*

### DATE

3/2/2026

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 53cdb176f96db83fa2e17baf7c2bccfc

### BUG FIX

- Fixed an issue where the phone could fail to respond to the call queue on servers that format the "P-Served-Queue" header in a specific way

### KNOWN ISSUES

- external.cfg currently only supports 3 configs; this will be fixed in a future firmware.
- GDMS call quality statistics aren't being displayed properly on v2 phones; this will be fixed in a future firmware.

## **FIRMWARE VERSION 1.0.13.119(REMOVED)**

### **PRODUCT NAME**

GRP2610, GRP2610P, GRP2611G, GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2613W, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### **DATE**

1/20/2026

### **FIRMWARE FILE INFORMATION**

- Firmware file name: grp2610fw.bin  
MD5: a8d14471c9a6454523edbd8637548911

### **ENHANCEMENT**

- Added ability to display location information on LCD under Status / System Info based on the HELD location response
- Added ability to configure DTMF tone duration for DTMF mode RFC2833 to use the codec sampling rate[DTMF TONE DURATION]
- When trying to enter the dialing screen, a Congestion Tone is now played when no accounts are configured and DirectIP calls are disabled
- Added support for Geolocation headers to follow RFC6442[GEOLOCATION HEADER FORMAT]
- Improved Italian and Czech LCD strings
- Added ability to configure SIP Registration Failure Retry Wait Time upon receiving 403 Forbidden[REGISTER RETRY ON 403]
- Added ability to configure “Features” softkey under Custom Idle Screen Softkey Layout
- Added ability to preserve DND status after reboot[PRESERVE DND STATUS]
- Added ability to configure whether or not the device will reboot when receiving “Event: Check-Sync”[CHECK-SYNC REBOOT]
- Added ability to download packet captures from Web UI when Capture Location is set to “USB”
- Improved Italian LCD strings
- Added “Dial DTMF” as a mode for Custom Call Screen Softkeys
- When configuring “Record” VMPK, if you configure the value field, it will now send that as DTMF to the server to start/stop server-side recording
- Added a “Enable VLAN” setting to the LCD menu under System → Network → Layer 2 QoS
- Updated TR069 remote configuration template

### **BUG FIX**

- Fixed an issue where time zone changes made on the LCD wouldn't take effect until the phone is rebooted
- Fixed an issue where the phone would fail to register to the secondary OBP after receiving 503 from the OBP
- Fixed a phone crash that could occur due to the processing of P-Served-User or P-Served-Queue headers
- Fixed an issue where retrieve parked call would always get the first parked call instead of the specified parked call in the list

- Fixed an issue where the phone would display the extension number over the contact name in Instant Messages
- Fixed some security vulnerabilities
- Fixed some Web UI string typos
- Fixed an issue where Wi-Fi credentials are wiped after trying to re-connect to Wi-Fi network, and the network doesn't respond
- Fixed an issue where after you switch the Web GUI language to Arabic, you will fail to add custom time features such as Scheduled Tasks and Office Hours
- Fixed an issue where "ForwardAll" softkey wasn't usable for users when "User Protection" is on
- Fixed an issue where the call waiting tone would play regardless if it is disabled, if the phone receives multiple incoming calls and then answers one of them
- Fixed an issue where setting Enable Hook Switch to "Yes, Except Answering Call" didn't work if you open another dialing screen after receiving an incoming call
- Fixed an issue where sip packets could be dropped by mistake if there are multiple TCP/TLS connections for the same account
- Fixed an issue where BLF status may not update in a busy BLF scenario
- Fixed an issue where the phone wouldn't play custom ringtone when receiving "Alert-Info: https://127.0.0.1"
- Fixed an issue where GDMS would generate a "Reboot" alert every time the phone loses its Wi-Fi connection
- Fixed an issue where if you provision the phone with a different ring volume, it wouldn't apply the change until after the phone reboots
- Fixed an issue in certain Wi-Fi environments where the phone may fail to connect to the AP
- Fixed an issue where Bluetooth could sometimes not work correctly if SNMP is enabled

## KNOWN ISSUES

- external.cfg currently only supports 3 configs; this will be fixed in a future firmware.
- GDMS call quality statistics aren't being displayed properly on v2 phones; this will be fixed in a future firmware.

## NEW FEATURE OVERVIEW

### DTMF TONE DURATION

- **No Web Configuration**
- **Functionality**

Configures the phone to use the codec sampling rate for the DTMF tone duration for DTMF mode RFC2833.

- **Pvalue**

| Pvalue      | Description                                                 | Value Range                                            | Default |
|-------------|-------------------------------------------------------------|--------------------------------------------------------|---------|
| 95028-96528 | <New Pvalue><br><br>Enable DTMF RFC2833 Codec Sampling Rate | 0-1<br><br>Value = 0; Disable<br><br>Value = 1; Enable | 0       |

## GEOLOCATION HEADER FORMAT

### Web Configuration

This option can be found under device web UI→Application→E911 Service

Geolocation Header Format ?

RFC6442

### Functionality

Configures the geolocation header format to follow RFC6442 or to use the previous legacy method.

### Pvalue

| Pvalue | Description                               | Value Range                      | Default |
|--------|-------------------------------------------|----------------------------------|---------|
| 8725   | <New Pvalue><br>Geolocation Header Format | 0-1<br>0 – Legacy<br>1 – RFC6442 | 0       |

## REGISTER RETRY ON 403

### Web Configuration

This option can be found under device web UI→Accounts→Account\_x→SIP Settings

Registration Retry Wait Time upon 403 Forbidden ?

1200

### Functionality

Configures the interval to retry registration if SIP registration failed due to 403 Forbidden.

### Pvalue

| Pvalue                      | Description                                                                                    | Value Range | Default |
|-----------------------------|------------------------------------------------------------------------------------------------|-------------|---------|
| 26002-26502,<br>52602-53502 | <New Pvalue><br>SIP Registration Failure Retry Wait Time<br>Upon 403 Forbidden – Accounts 1-16 | 0-3600      | 1200    |

## PRESERVE DND STATUS

### Web Configuration

This option can be found under device web UI→Phone Settings→Call Settings

Preserve DND Status  ☐

### Functionality

Configures whether you want the device to preserve its DND status after a reboot

### Pvalue

| Pvalue | Description                         | Value Range                                      | Default |
|--------|-------------------------------------|--------------------------------------------------|---------|
| 8537   | <New Pvalue><br>Preserve DND Status | 0-1<br>Value = 0; Disabled<br>Value = 1; Enabled | 0       |

## CHECK-SYNC REBOOT

### Web Configuration

This option can be found under device web UI→Accounts→Account\_x→Advanced Settings

Reboot on check-sync event without "reboot="  ☒

### Functionality

Configures whether you want the device to reboot on receiving “Event: Check-Sync”. If set to “Reboot”, the device will reboot. If set to “No reboot”, the device will provision and not reboot.

### Pvalue

| Pvalue      | Description                                                                     | Value Range                                      | Default |
|-------------|---------------------------------------------------------------------------------|--------------------------------------------------|---------|
| 95030-96530 | <New Pvalue><br>Reboot on check-sync event without<br>“reboot=” – Accounts 1-16 | 0-1<br>Value = 0; No reboot<br>Value = 1; Reboot | 1       |

## FIRMWARE VERSION 1.0.13.59

### PRODUCT NAME

GRP2610, GRP2610P, GRP2611G, GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2613W, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

09/29/2025

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 2ad16eae69c21cbe0ce506ed1a01ad96

### ENHANCEMENT

- Added support for AI Noise Suppression for non-legacy hardware(excludes models: GRP2610/P, GRP2611G, GRP2612/P/W/G and GRP2613) [NOISE SUPPRESSION MODE]
- Added a dialog box that appears 30 seconds before your public mode login times out which give you the option to reset the login timer
- Added support for listening in on a headset call using the handset[GROUP LISTEN WITH HANDSET]
- Added support for VPK mode: "Multicast Listener" which lets you monitor a configured multicast address[MULTICAST LISTENER VPK]
- Increased maximum custom idle softkeys from 3 to 6[CUSTOM IDLE SOFTKEYS 4-6]
- With "Ringback Tone at No Early Media" enabled, a ringback tone will now be played after a short timer if no early media audio arrives after receiving a 183 with SDP
- Updated "Minimum TLS Version" and "Enable/Disable Weak Ciphers" default values to be more secure
- Security version of the phone is now displayed on WebUI and LCD
- Added a status bar icon that is displayed when remote connection is taking place via GDMS
- Added support for taking screenshots of the LCD via GDMS
- Improved Ukrainian strings
- Added support for dialing server call features silently[SILENT SERVER CALL FEATURES]
- Added ability to display the year on the status bar[SHOW FULL DATE ON STATUS BAR]
- Increased maximum SSH public key length
- Added support for alert-info Bellcore mapping[ALERT-INFO BELLCORE MAPPING]
- Alert-Info header is now case insensitive
- Added ability to call flip with supported UCM[CALL FLIP WITH UCM]
- Added support for UCM Feature Code Request when the server supports "X-GS-Config"
- Increased maximum certificate key length

### BUG FIX

- Fixed an issue where intercom calls using FAC would sometimes fail with BroadSoft server
- Fixed an issue where the wrong port is used when sending SIP packets to the secondary OBP
- Fixed an issue where the wrong subscription dialog was being terminated which can cause BLF VPKs to not respond
- Fixed an issue on Zoom server where the shared line key kept blinking red even after the incoming call has been cancelled

- Fixed an issue on Zoom server where the shared line was not updating the LED or icon when making calls from another device on the same extension
- Fixed an issue where multicast paging would use the speaker instead of the handset even though the handset is off-hook
- Fixed an issue where dialing FACs could fail if feature key synchronization fails with the server
- Fixed an issue where the "Send" hardkey wasn't behaving correctly in some cases
- Fixed an issue where the "Wallpaper Source" setting was missing in the TR069 data model
- Reverted to dark wallpaper due to visibility concerns
- Fixed an issue where some words were still displayed in English when the phone is configured to use Ukrainian
- Fixed an issue where phonebook wasn't being downloaded immediately after provisioning on the 3CX server
- Fixed an issue where the packet capture feature wasn't working while VPN is enabled on the phone
- Fixed an issue where call park MPKs wouldn't update the LED when the parking lot status changes
- Fixed an issue where the VM icon had a higher priority than the call forward icon, so you might not see that call forwarding is enabled
- Fixed an issue where phones on legacy hardware using only WiFi can crash when the phone uses a custom ringtone and receives an incoming call
- Fixed an issue where the double quotes symbol(") wasn't an allowed character when entering characters for WiFi password authentication on the LCD menu
- Fixed an issue where alert-infos that don't start with http/https weren't working correctly
- Fixed an issue with Eventlist BLF where the BLF could stop working and the WebUI will show abnormal values for the affected VPKs
- Fixed an issue where it was slower than expected to use GDMS Remote Access to Web GUI
- Fixed some security vulnerability

## KNOWN ISSUES

- external.cfg currently only supports 3 configs; this will be fixed in a future firmware.
- GDMS call quality statistics aren't being displayed properly on v2 phones; this will be fixed in a future firmware.

## NEW FEATURE OVERVIEW

### NOISE SUPPRESSION MODE

- **Web Configuration**

This option can be found under device web UI→System Settings→ Preferences -> Other Noise Cancellation

#### | Other Noise Cancellation

Noise Suppression Mode ?

AI Noise Cancellation

- **Functionality**

Configures the user's preferred noise suppression mode.

- **Pvalue**

| Pvalue | Description                            | Value Range                                                                                  | Default |
|--------|----------------------------------------|----------------------------------------------------------------------------------------------|---------|
| 22574  | <New Pvalue><br>Noise Suppression Mode | 0-1<br><br>Value = 0; Traditional Noise Cancellation<br><br>Value = 1; AI Noise Cancellation | 0       |

## GROUP LISTEN WITH HANDSET

- Web Configuration**

This option can be found under device web UI→System Settings→ Preferences -> Headset

Group Listen with handset  ☐

- Functionality**

Enables the ability to use the handset to listen in on a headset call

- Pvalue**

| Pvalue | Description                               | Value Range                                              | Default |
|--------|-------------------------------------------|----------------------------------------------------------|---------|
| 22100  | <New Pvalue><br>Group Listen with handset | 0-1<br><br>Value = 0; Disabled<br><br>Value = 1; Enabled | 0       |

## MULTICAST LISTENER VPK

- Web Configuration**

This option can be found under VMPK modes on the device web UI

Mode

 Multicast Listener 

- Functionality**

After configuring a multicast address to listen to, the VPK will blink to indicate that multicast paging to that address is active. The user can then click on the VPK to listen to the multicast paging.

- **Value**

| Value | Description        | Value Range |
|-------|--------------------|-------------|
| 42    | Multicast Listener | String      |

#### CUSTOM IDLE SOFTKEYS 4-6

- **Web Configuration**

This option can be found under device web UI→Programmable Keys → Idle Screen Softkeys

| Custom Softkey (0/6) ?

Add Custom Softkey

- **Functionality**

Configures the idle screen custom softkeys

- **Pvalue**

| Pvalue | Description                             | Value Range              | Default |
|--------|-----------------------------------------|--------------------------|---------|
| P8726  | <New Pvalue><br>Key Mode – Softkey 4    | (-1)-35                  | -1      |
| P8727  | <New Pvalue><br>Account – Softkey 4     | 0-15, depending on model | 0       |
| P8728  | <New Pvalue><br>Description – Softkey 4 | String                   |         |
| P8729  | <New Pvalue><br>Value – Softkey 4       | String                   |         |
| P8730  | <New Pvalue><br>Key Mode – Softkey 5    | (-1)-35                  | -1      |

|       |                                         |                          |    |
|-------|-----------------------------------------|--------------------------|----|
| P8731 | <New Pvalue><br>Account – Softkey 5     | 0-15, depending on model | 0  |
| P8732 | <New Pvalue><br>Description – Softkey 5 | String                   |    |
| P8733 | <New Pvalue><br>Value – Softkey 5       | String                   |    |
| P8734 | <New Pvalue><br>Key Mode – Softkey 6    | (-1)-35                  | -1 |
| P8735 | <New Pvalue><br>Account – Softkey 6     | 0-15, depending on model | 0  |
| P8736 | <New Pvalue><br>Description – Softkey 6 | String                   |    |
| P8737 | <New Pvalue><br>Value – Softkey 6       | String                   |    |

## SILENT SERVER CALL FEATURE

- Web Configuration**

This option can be found under device web UI→Accounts → Account\_x → Feature Codes

Server Silent for Call Features [?](#)

☐ DND
 ☐ Call Forward Always
 ☐ Call Forward Busy
 ☐ Call Forward No Answer

- Functionality**

If configured, for the chosen call features, when you dial the server feature code for them, no audio will be played and the call will be ended automatically.

- Pvalue**

| Pvalue | Description | Value Range | Default |
|--------|-------------|-------------|---------|
|--------|-------------|-------------|---------|

|                   |                                                                 |        |  |
|-------------------|-----------------------------------------------------------------|--------|--|
| P60099-<br>P61599 | <New Pvalue><br>Server Silent for Call Features – Accounts 1-16 | String |  |
|-------------------|-----------------------------------------------------------------|--------|--|

## SHOW FULL DATE ON STATUS BAR

- Web Configuration**

This option can be found under device web UI→System Settings → Time and Language → Date and Time

Show Date on Status Bar ?

Full Date

- Functionality**

Configures whether to set the date on status bar and also how to display it. The “Short Date” setting displays the month and day, and the “Full Date” setting displays the month, day, and year.

- Pvalue**

| Pvalue | Description                             | Value Range | Default                                        |
|--------|-----------------------------------------|-------------|------------------------------------------------|
| P8387  | <Old Pvalue><br>Show Date on Status Bar | 0-2         | 0 – No Date<br>1 – Short Date<br>2 – Full Date |

## ALERT-INFO BELLCORE MAPPING

- Web Configuration**

This option can be found under device web UI→Accounts → Accounts\_x → Call Settings → Ringtone

Enable Alert-Info Bellcore Mapping ?



- Functionality**

This feature allows the IP phone to enable or disable the mapping of keywords in the Alert-Info header to predefined Bellcore ringtones. If the setting is enabled, when Alert-Info: <Bellcore-dr%N> is received the corresponding Bellcore tone will be played, where N is between 1 and 5. If the setting is disabled, then a corresponding custom ringtone will be played instead. If N is between 6 to 10 the custom ring file will always be played regardless of this setting. If N is 0, a silent ringtone will be used. If N is out of range (N<0 or N >10), the default ringtone will be used.

- Pvalue**

| Pvalue | Description | Value Range | Default |
|--------|-------------|-------------|---------|
|--------|-------------|-------------|---------|

|                   |                                                                       |                                                  |   |
|-------------------|-----------------------------------------------------------------------|--------------------------------------------------|---|
| P95026-<br>P96526 | <New Pvalue><br>Enable Alert-Info Bellcore Mapping –<br>Accounts 1-16 | 0-1<br>Value = 0; Disabled<br>Value = 1; Enabled | 1 |
|-------------------|-----------------------------------------------------------------------|--------------------------------------------------|---|

## CALL FLIP WITH UCM

- Web Configuration**

This option can be found under device web UI→Accounts → Accounts\_x → Call Settings → General

Call Flip Notification Mode 

No Call Info

- Functionality**

Added the call flip feature to receive the call flip popup when the same extension is calling on the other device. You can configure the setting to control how much of the call details should be displayed on the call flip popup.

- Pvalue**

| Pvalue            | Description                                                     | Value Range                                                                              | Default |
|-------------------|-----------------------------------------------------------------|------------------------------------------------------------------------------------------|---------|
| P95027-<br>P96527 | <New Pvalue><br>Call Flip Notification Mode – Accounts 1-<br>16 | 0-2<br>Value = 0; Disabled<br>Value = 1; No Call<br>Info<br>Value = 2; Full Call<br>Info | 1       |

## FIRMWARE VERSION 1.0.13.31

### PRODUCT NAME

GRP2610, GRP2610P, GRP2611G, GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2613W, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

06/13/2025

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 50964d6a42cc64b4b6ea3b6be61b79cf

### ENHANCEMENT

- Added the ability to ignore the diversion header [IGNORE DIVERSION HEADER]
- Added partial match support in Predictive Dialing Search for Phonebook contacts

### BUG FIX

- Fixed an issue where the phone would fail to re-register if the server responds with a 200 OK with no "expires" parameter
- Fixed a security vulnerability
- Fixed an issue where the phone was not updating the Remote-Party-ID number in call history
- Fixed an issue where the "Enable Busy Tone on Remote Disconnect" value was using the wrong default value after a factory reset
- Fixed an issue where the recommended time zone would be displayed as "Unknown" if it was using a time zone that doesn't belong to the list of time zones on the device
- Fixed an issue where LDAPS queries would fail on servers that don't support the "Type" attribute
- Fixed an issue where the LCD would sometimes show partial or missing contact data when using LDAP Lookup for incoming calls
- Fixed an issue where the VMPK may not light up properly if Handsfree mode is on.
- Fixed an issue where the phone can crash when attempting to dial an empty entry provided by remote phonebook
- Fixed an issue where the phone couldn't use the DIAL softkey to dial out selected partial matching number during transfer or conference
- Fixed an issue where the softkey layout wasn't displaying properly when Custom Call Screen Softkey Layout is enabled and the user is switching between 2 different types of calls.
- Fixed an issue with certain servers where the phone doesn't return to the idle screen automatically after completing semi-attended transfer
- Fixed an issue where the DUT can still make direct IP calls when account 1 is not enabled
- Fixed an issue where the Dial hard key was not working in the Phonebook List
- Fixed an issue where the Phonebook view may not focus correctly when navigating back and forth
- Fixed an issue where remote phonebooks 4 and 5 were not included in predictive dial search
- Fixed DUT resets CSeq but keeps same Call-ID tag after network change
- Fixed Local Phonebook dial popup does not work with SEND\_HARDKEY
- Fixed Mute indicators disappear when navigating to other calls

## KNOWN ISSUES

- external.cfg currently only supports 3 configs; this will be fixed in a future firmware.
- GDMS call quality statistics aren't being displayed properly on v2 phones; this will be fixed in a future firmware.

## NEW FEATURE OVERVIEW

### IGNORE DIVERSION HEADER

- Web Configuration**

This option can be found under device web UI→Phone Settings→ Call Settings

Enable diversion information display  

- Functionality**

When the setting is disabled, the information in the Diversion header won't be used

- Pvalue**

| Pvalue | Description                                          | Value Range                            | Default |
|--------|------------------------------------------------------|----------------------------------------|---------|
| 22237  | <New Pvalue><br>Enable diversion information display | 0-1<br>Value = 0; No<br>Value = 1; Yes | 1       |

## FIRMWARE VERSION 1.0.13.21

### PRODUCT NAME

GRP2610, GRP2610P, GRP2611G, GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2613W, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

03/13/2025

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 28b4ed3139c363efd799e80a5cdccdc4

### ENHANCEMENT

- Added Portuguese EU language support for LCD and WebUI
- Added support for downloading multiple custom config files in succession[MULTIPLE CUSTOM CONFIG]
- Added support for viewing call quality statistics via GDMS
- Added support for customizing early media response[EARLY MEDIA]
- Added support for filtering characters out of outbound numbers[FILTER CHARACTERS]
- There is now a countdown timer for when firmware upgrading will be performed
- Added support for LDAP type "Conference"
- Added support for phone type "Conference" in xml phonebook
- Added support for multiple XmlApp launch points where each launch point can be configured to use a different XmlApp server path
- Added support for token definitions under XmlApp server path configurations
- Added support for the "ShowLabel" softkey so you can see the complete VPK label during calls
- Added support for printing MPK label cards from the Web UI
- Added support for using contact names even if the number only partially matches[PARTIAL NUMBER LOOKUP]
- Optimized GDMS redirection and provision time
- Added support for rolling back to alternative firmware when booting up; when you bootup holding the 1+9 keys, you can choose if you want to factory reset or rollback to alternative firmware
- Added support for displaying the call queue name that the phone receives from UCM
- Improved Energy Savings page on WebUI to be more user-friendly
- Added support for a configurable station name label[CUSTOMIZED STATION LABEL]
- Added predictive dialing support for LDAP directory
- Added support for OpenVPN Client Key Password[OPENVPN CLIENT KEY PASSWORD]
- Added support for scheduled tasks[SCHEDULED TASKS]
- Added support for certificate uploading for WPA-EAP TLS method
- Added support for PTT(Push-to-talk)[PUSH-TO-TALK]
- Added support for hiding specific or all pop-ups[POP-UP HIDDEN SETTINGS]
- Added support for SIP URI
- Added support for DNS SRV mode for LDAP server lookup[LDAP SRV LOOKUP]
- Added support for multicast call timeout[MULTICAST CALL TIMEOUT]
- Added support for hiding remote user ID by digit plan[HIDDEN NUMBER PLAN]
- Added support for deleting call logs after guest checkout when using UCM
- Added support for disabling the headset key

- Added the “GDS Opendoor” softkey to the call screen softkeys list in Custom Softkey Layout
- Added support for the Transfer to VM feature code[TRANSFER TO VM FEATURE CODE]
- Added support for Enhanced Call Park[ENHANCED CALL PARK]
- Wallpaper tooltip now displays the recommended dimensions for the model in use
- Added support for hiding Bluetooth and WiFi settings from LCD and WebUI[HIDE BT AND WIFI]
- Added support for controlling DTMF Tone Gain[DTMF TONE GAIN]
- Now displays connected Wi-Fi signal strength on LCD
- Added support for configuring different settings for each WiFi SSID via pvalue/alias[WIFI SSID SETTINGS]
- Increased maximum number of SIP accounts of GRP2614/24/34 to 12 accounts and GRP2615/16/36/50/70 to 16 accounts
- Added support for provisioned ringtone soft reset[RINGTONE SOFT RESET]
- Added a “Login from LCD” button when accessing the Web GUI after factory reset; when you click the button, the phone’s LCD will prompt you to enter the PIN displayed on the Web UI, and then you can change the default admin password on the Web GUI
- Added support for OpenVPN failover[OPENVPN FAILOVER]
- Added support for remote access to Web UI via GDMS for firmwares 1.0.13.20+
- Improved SIP/TLS error handling

## BUG FIX

- Fixed an issue where you couldn’t use the menu button to select available Wi-Fi networks after scanning, you could only use the “Connect” softkey
- Fixed an issue where multicast paging would continue to play through the BT headset even after switching to the speakerphone
- Fixed an issue where call hold will fail if there are calls from the primary and secondary server at the same time
- Fixed an issue where a LDAP Search VPK wouldn’t display its label properly if you didn’t use a valid LDAP base domain as the label
- Fixed an issue where you can have no audio out if you receive the 200 OK too quickly after the 183 Session Progress
- Fixed an issue where some FXS devices were not able to play DTMF tones when receiving DTMF events from GRP261x legacy devices
- Fixed an issue where the GRP2670 was missing a MWI configuration on the WebUI
- Fixed an issue where the phone couldn’t be auto discovered by UCM using SIP-Message
- Fixed an issue where you couldn’t view the local phonebook on the LCD in public mode, but you could view it on the Web UI
- Fixed an issue where the xml app could fail to display a picture on the first load
- Fixed an issue where the CTI command for DND wasn’t working
- Fixed an issue where the OpenDoor softkey would open both GDS’ doors if both doors had the same password; now you can pick which door to open
- Removed limitation where you couldn’t use a programable key to transfer if the configured account for the key is different from the active account performing the transfer
- Fixed an issue where you would fail to connect using OpenVPN if the .ovpn file contains “auth-user-pass” but is missing the username and password
- Fixed an issue where the Record MPK wasn’t blinking when in use
- Fixed an issue where pressing the keypad digits could cause an incoming call ringing to be muted
- Fixed an issue where redialing certain SIP-URI would fail
- Fixed some security vulnerabilities
- Fixed an issue where the device couldn’t properly play ringtones in which the header size is over 64 bytes
- Fixed an issue where if you perform a LDAP search with “Sort Results” enabled, you would dial out using the first result even when you select the non-first results
- Fixed an issue where using LDAP lookup could result in the phone displaying the caller ID twice

- Fixed an issue where a error message would be displayed when performing an LDAP search with a “Number Filter” set with “%\*”
- Fixed a rare GBX20 fail to start up issue in prior 1.0.13.x when multiple GBX20s are used with legacy GRP261X hardware.

## KNOWN ISSUES

- external.cfg currently only supports 3 configs; this will be fixed in a future firmware.
- GDMS call quality statistics aren’t being displayed properly on v2 phones; this will be fixed in a future firmware.

## NEW FEATURE OVERVIEW

### MULTIPLE CUSTOM CONFIG

- **Functionality**

When the phone attempts to provision, it will check for a “external.cfg” file in the config file server path. The external.cfg file will include a list of .cfg files for the phone to attempt to download in succession. The format is as follows:  
 tftp://192.168.0.2/\$PN\_\$MAC/\$PN\_\$MAC.xml,[http://192.168.0.2/\\$MAC\\_\\$PN/\\$MAC\\_\\$PN.cfg](http://192.168.0.2/$MAC_$PN/$MAC_$PN.cfg)  
 where \$PN will automatically be replaced with the phone model and \$MAC will be automatically be replaced with the phone’s MAC address

### EARLY MEDIA

- **Web Configuration**

This option can be found under device web UI→Accounts→ Accounts →Account\_x→SIP Settings.

Use P-Early-Media Header  ☐

This option can be found under device web UI→Accounts→ Accounts →Account\_x→Call Settings.

Ringback Tone at No Early Media  ☐

- **Functionality**

The first setting configures if the “P-Early-Media” header should be supported. The second setting plays the ringback tone when you don’t receive early media RTP packets when “P-Early-Media” header is supported.

- **Pvalue**

| Pvalue | Description | Value Range | Default |
|--------|-------------|-------------|---------|
|--------|-------------|-------------|---------|

|       |                                                       |                                        |   |
|-------|-------------------------------------------------------|----------------------------------------|---|
| 60072 | <New Pvalue><br>Account 1 – Use P-Early-Media-Header  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60172 | <New Pvalue><br>Account 2 – Use P-Early-Media-Header  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60272 | <New Pvalue><br>Account 3 – Use P-Early-Media-Header  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60372 | <New Pvalue><br>Account 4 – Use P-Early-Media-Header  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60472 | <New Pvalue><br>Account 5 – Use P-Early-Media-Header  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60572 | <New Pvalue><br>Account 6 – Use P-Early-Media-Header  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60672 | <New Pvalue><br>Account 7 – Use P-Early-Media-Header  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60772 | <New Pvalue><br>Account 8 – Use P-Early-Media-Header  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60872 | <New Pvalue><br>Account 9 – Use P-Early-Media-Header  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60972 | <New Pvalue><br>Account 10 – Use P-Early-Media-Header | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61072 | <New Pvalue><br>Account 11 – Use P-Early-Media-Header | 0-1<br>Value = 0; No                   | 0 |

|       |                                                             |                                        |   |
|-------|-------------------------------------------------------------|----------------------------------------|---|
|       |                                                             | Value = 1; Yes                         |   |
| 61172 | <New Pvalue><br>Account 12 – Use P-Early-Media-Header       | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61272 | <New Pvalue><br>Account 13 – Use P-Early-Media-Header       | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61372 | <New Pvalue><br>Account 14 – Use P-Early-Media-Header       | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61472 | <New Pvalue><br>Account 15 – Use P-Early-Media-Header       | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61572 | <New Pvalue><br>Account 16 – Use P-Early-Media-Header       | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60073 | <New Pvalue><br>Account 1 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60173 | <New Pvalue><br>Account 2 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60273 | <New Pvalue><br>Account 3 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60373 | <New Pvalue><br>Account 4 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60473 | <New Pvalue><br>Account 5 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |

|       |                                                              |                                        |   |
|-------|--------------------------------------------------------------|----------------------------------------|---|
| 60573 | <New Pvalue><br>Account 6 – Ringback Tone at No Early Media  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60673 | <New Pvalue><br>Account 7 – Ringback Tone at No Early Media  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60773 | <New Pvalue><br>Account 8 – Ringback Tone at No Early Media  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60873 | <New Pvalue><br>Account 9 – Ringback Tone at No Early Media  | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 60973 | <New Pvalue><br>Account 10 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61073 | <New Pvalue><br>Account 11 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61173 | <New Pvalue><br>Account 12 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61273 | <New Pvalue><br>Account 13 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61373 | <New Pvalue><br>Account 14 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61473 | <New Pvalue><br>Account 15 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0 |
| 61573 | <New Pvalue><br>Account 16 – Ringback Tone at No Early Media | 0-1<br>Value = 0; No                   | 0 |

|  |  |                |  |
|--|--|----------------|--|
|  |  | Value = 1; Yes |  |
|--|--|----------------|--|

## FILTER CHARACTERS

- Web Configuration**

This option can be found under device web UI→Phone Settings→ Call Settings.

Filter Characters 

- Functionality**

Filters out specified characters in dial-out calls.

- Pvalue**

| Pvalue | Description                       | Value Range | Default  |
|--------|-----------------------------------|-------------|----------|
| 22012  | <New Pvalue><br>Filter Characters | String      | [( )- ]+ |

## PARTIAL CHARACTER LOOKUP

- Web Configuration**

This option can be found under device web UI→Phone Settings→ Call Settings.

Enable Partial Contact Number Lookup 



Minimum partial match length 

Maximum partial match length 

- Functionality**

Enables partial contact number lookup for incoming and outgoing calls. You can specify the minimum and maximum partial match length.

- Pvalue**

| Pvalue | Description                                          | Value Range                            | Default |
|--------|------------------------------------------------------|----------------------------------------|---------|
| 8633   | <New Pvalue><br>Enable Partial Contact Number Lookup | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0       |
| 8635   | <New Pvalue><br>Minimum partial match length         | 4-15                                   | 7       |
| 8634   | <New Pvalue><br>Maximum partial match length         | 4-15                                   | 10      |

## CUSTOMIZED STATION LABEL

- Web Configuration**

This option can be found under device web UI→Phone Settings→ General Settings.

Customized Station Label 

- Functionality**

Configures the customized station label that is displayed on the status bar of the LCD.

- Pvalue**

| Pvalue | Description                                          | Value Range | Default |
|--------|------------------------------------------------------|-------------|---------|
| 8638   | <New Pvalue><br>Enable Partial Contact Number Lookup | String      |         |

## OPENVPN CLIENT KEY PASSWORD

- Web Configuration**

This option can be found under device web UI→Network Settings→ OpenVPN ® Settings.

OpenVPN® Client Key Password 

- Functionality**

Configures the password for the client.key file

- **Pvalue**

| Pvalue | Description                                  | Value Range | Default |
|--------|----------------------------------------------|-------------|---------|
| 20715  | <New Pvalue><br>OpenVPN® Client Key Password | String      |         |

## SCHEDULED TASKS

- **Web Configuration**

This option can be found under device web UI→Maintenance→ Scheduled Tasks.

Add
×

---

Scheduled Tasks Type ?

Scheduled Reboot
▼

Repetition Period ?

No Repeat
▼

Effective Time ?

Custom
▼

00:00 🕒

---

Cancel

Save

- **Functionality**

Added support for scheduling tasks. Currently supported tasks are: Reboot, lock the phone, unlock the phone, and call forwarding.

- **Pvalue**

| Pvalue | Description                     | Value Range | Default |
|--------|---------------------------------|-------------|---------|
| 22448  | <New Pvalue><br>Scheduled Tasks | String      |         |

|       |                                    |        |             |
|-------|------------------------------------|--------|-------------|
| 22449 | <New Pvalue><br>Scheduled Worktime | String | 09:00-17:00 |
|-------|------------------------------------|--------|-------------|

## PUSH-TO-TALK

- Web Configuration**

This option can be found under device web UI→Programmable Keys→ Advanced Settings.

Enable Push-To-Talk  ☐

- Functionality**

Configures whether to enable Push-To-Talk functionality when long-pressing the Intercom VPK

- Pvalue**

| Pvalue | Description                         | Value Range                            | Default |
|--------|-------------------------------------|----------------------------------------|---------|
| 8667   | <New Pvalue><br>Enable Push-To-Talk | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0       |

## POP-UP HIDDEN SETTINGS

- Web Configuration**

This option can be found under device web UI→Phone Settings→ General Settings.

| Pop-up Hidden Settings

Hide Pop-up Options 

Disable 

- Functionality**

Configures which type of pop-ups to hide.

- Pvalue**

| Pvalue | Description | Value Range | Default |
|--------|-------------|-------------|---------|
|--------|-------------|-------------|---------|

|       |                                     |                                                                                                                                             |   |
|-------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---|
| 22530 | <New Pvalue><br>Hide Pop-up Options | 0-3<br>Value = 0; Disable<br>Value = 1; All Success<br>Value = 2; All Success & All Info<br>Value = 3; All Success & All Info & All Warning | 0 |
|-------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---|

## LDAP SRV LOOKUP

- Web Configuration**

This option can be found under device web UI→Application→ LDAP.

LDAP DNS Mode ?

A Record

- Functionality**

Configures which DNS mode to use for LDAP lookup

- Pvalue**

| Pvalue | Description                   | Value Range                                  | Default |
|--------|-------------------------------|----------------------------------------------|---------|
| 8668   | <New Pvalue><br>LDAP DNS Mode | 0-1<br>Value = 0; A Record<br>Value = 1; SRV | 0       |

## MULTICAST CALL TIMEOUT

- Web Configuration**

This option can be found under device web UI→Phone Settings→ Multicast Paging.

Multicast Call Timeout(s) ?

0

- Functionality**

Configures whether to hang up the multicast call after the duration has exceeded the configured

timeout. If set to 0, then there is no timeout.

- **Pvalue**

| Pvalue | Description                               | Value Range | Default |
|--------|-------------------------------------------|-------------|---------|
| 22532  | <New Pvalue><br>Multicast Call Timeout(s) | 0, 30-3600  | 0       |

## HIDDEN NUMBER PLAN

- **Web Configuration**

This option can be found under device web UI→Phone Settings→ Multicast Paging.

Hidden Number Features ?
 

Disabled

Hidden Number Plan List ?
 

x+(xxxx)xxxx

^

✓

✗

xx(xx+)xx

^

✓

✗

x(xx+)x

^

✓

✗

x(x+)

^

✓

✗

(x+)

^

✓

✗

+

Hidden Number Plan Test ?
 

Number

>>

Test result

- **Functionality**

Configures whether to hide the remote user ID for outgoing/incoming calls if it matches the configured syntax in the plan list

- **Pvalue**

| Pvalue | Description | Value Range | Default |
|--------|-------------|-------------|---------|
|--------|-------------|-------------|---------|

|       |                                                    |                                                                                                                                   |   |
|-------|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---|
| 26043 | <New Pvalue><br>Account 1 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls | 0 |
| 26143 | <New Pvalue><br>Account 2 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls | 0 |
| 26243 | <New Pvalue><br>Account 3 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls | 0 |
| 26343 | <New Pvalue><br>Account 4 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls | 0 |
| 26443 | <New Pvalue><br>Account 5 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only                                    | 0 |

|       |                                                     |                                                                                                                                            |   |
|-------|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---|
|       |                                                     | Value = 3; Both<br>Direction Calls                                                                                                         |   |
| 26543 | <New Pvalue><br>Account 6 - Hidden Number Features  | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming<br>Calls Only<br>Value = 2; Outgoing<br>Calls Only<br>Value = 3; Both<br>Direction Calls | 0 |
| 26643 | <New Pvalue><br>Account 7 - Hidden Number Features  | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming<br>Calls Only<br>Value = 2; Outgoing<br>Calls Only<br>Value = 3; Both<br>Direction Calls | 0 |
| 26743 | <New Pvalue><br>Account 8 - Hidden Number Features  | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming<br>Calls Only<br>Value = 2; Outgoing<br>Calls Only<br>Value = 3; Both<br>Direction Calls | 0 |
| 26843 | <New Pvalue><br>Account 9 - Hidden Number Features  | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming<br>Calls Only<br>Value = 2; Outgoing<br>Calls Only<br>Value = 3; Both<br>Direction Calls | 0 |
| 26943 | <New Pvalue><br>Account 10 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming                                                                                          | 0 |

|       |                                                     |                                                                                                                                   |   |
|-------|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---|
|       |                                                     | Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls                                                   |   |
| 27043 | <New Pvalue><br>Account 11 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls | 0 |
| 27143 | <New Pvalue><br>Account 12 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls | 0 |
| 27243 | <New Pvalue><br>Account 13 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls | 0 |
| 27343 | <New Pvalue><br>Account 14 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls | 0 |

|       |                                                     |                                                                                                                                   |                                                       |
|-------|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| 27443 | <New Pvalue><br>Account 15 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls | 0                                                     |
| 27543 | <New Pvalue><br>Account 16 - Hidden Number Features | 0-3<br>Value = 0; Disabled<br>Value = 1; Incoming Calls Only<br>Value = 2; Outgoing Calls Only<br>Value = 3; Both Direction Calls | 0                                                     |
| 60058 | <New Pvalue><br>Account 1 – Hidden Number Plan List | String                                                                                                                            | { x+(xxxx)xxxx   xx(xx+)xx   x(xx+)x   x(x+)   (x+) } |
| 60158 | <New Pvalue><br>Account 2 – Hidden Number Plan List | String                                                                                                                            | { x+(xxxx)xxxx   xx(xx+)xx   x(xx+)x   x(x+)   (x+) } |
| 60258 | <New Pvalue><br>Account 3 – Hidden Number Plan List | String                                                                                                                            | { x+(xxxx)xxxx   xx(xx+)xx   x(xx+)x   x(x+)   (x+) } |
| 60358 | <New Pvalue><br>Account 4 – Hidden Number Plan List | String                                                                                                                            | { x+(xxxx)xxxx   xx(xx+)xx   x(xx+)x   x(x+)   (x+) } |
| 60458 | <New Pvalue><br>Account 5 – Hidden Number Plan List | String                                                                                                                            | { x+(xxxx)xxxx   xx(xx+)xx   x(xx+)x   x(x+)   (x+) } |
| 60558 | <New Pvalue><br>Account 6 – Hidden Number Plan List | String                                                                                                                            | { x+(xxxx)xxxx   xx(xx+)xx   x(xx+)x   x(x+)   (x+) } |
| 60658 | <New Pvalue><br>Account 7 – Hidden Number Plan List | String                                                                                                                            | { x+(xxxx)xxxx   xx(xx+)xx   x(xx+)x   x(x+)   (x+) } |

|       |                                                      |        |                                                                |
|-------|------------------------------------------------------|--------|----------------------------------------------------------------|
| 60758 | <New Pvalue><br>Account 8 – Hidden Number Plan List  | String | { x+(xxxx)xxxx  <br>xx(xx+)xx  <br>x(xx+)x   x(x+)  <br>(x+) } |
| 60858 | <New Pvalue><br>Account 9 – Hidden Number Plan List  | String | { x+(xxxx)xxxx  <br>xx(xx+)xx  <br>x(xx+)x   x(x+)  <br>(x+) } |
| 60958 | <New Pvalue><br>Account 10 – Hidden Number Plan List | String | { x+(xxxx)xxxx  <br>xx(xx+)xx  <br>x(xx+)x   x(x+)  <br>(x+) } |
| 61058 | <New Pvalue><br>Account 11 – Hidden Number Plan List | String | { x+(xxxx)xxxx  <br>xx(xx+)xx  <br>x(xx+)x   x(x+)  <br>(x+) } |
| 61158 | <New Pvalue><br>Account 12 – Hidden Number Plan List | String | { x+(xxxx)xxxx  <br>xx(xx+)xx  <br>x(xx+)x   x(x+)  <br>(x+) } |
| 61258 | <New Pvalue><br>Account 13 – Hidden Number Plan List | String | { x+(xxxx)xxxx  <br>xx(xx+)xx  <br>x(xx+)x   x(x+)  <br>(x+) } |
| 61358 | <New Pvalue><br>Account 14 – Hidden Number Plan List | String | { x+(xxxx)xxxx  <br>xx(xx+)xx  <br>x(xx+)x   x(x+)  <br>(x+) } |
| 61458 | <New Pvalue><br>Account 15 – Hidden Number Plan List | String | { x+(xxxx)xxxx  <br>xx(xx+)xx  <br>x(xx+)x   x(x+)  <br>(x+) } |
| 61558 | <New Pvalue><br>Account 16 – Hidden Number Plan List | String | { x+(xxxx)xxxx  <br>xx(xx+)xx  <br>x(xx+)x   x(x+)  <br>(x+) } |

## TRANSFER TO VM FEATURE CODE

- **Web Configuration**

This option can be found under device web UI→Accounts→Accounts→Accounts\_x→Call Settings.

Transfer to VM feature code [?](#)

\*

- **Functionality**

Configures the feature code to be used as an extension prefix when performing a transfer to voicemail. During a call, you can either:

1. Press the “Transfer” softkey, and enter the target voicemail number. Then you can either long press the “BlindTrnf” softkey or press the VM hardkey to perform the transfer to voicemail.
2. Press the VM hardkey to enter the VM transfer screen and enter the target VM number. Then you can either press the “TRNF>VM” softkey or VM hardkey to perform the transfer to voicemail.

- **Pvalue**

| Pvalue | Description                                             | Value Range | Default |
|--------|---------------------------------------------------------|-------------|---------|
| 60092  | <New Pvalue><br>Account 1 - Transfer to VM feature code | String      | *       |
| 60192  | <New Pvalue><br>Account 2 - Transfer to VM feature code | String      | *       |
| 60292  | <New Pvalue><br>Account 3 - Transfer to VM feature code | String      | *       |
| 60392  | <New Pvalue><br>Account 4 - Transfer to VM feature code | String      | *       |
| 60492  | <New Pvalue><br>Account 5 - Transfer to VM feature code | String      | *       |
| 60592  | <New Pvalue><br>Account 6 - Transfer to VM feature code | String      | *       |
| 60692  | <New Pvalue><br>Account 7 - Transfer to VM feature code | String      | *       |
| 60792  | <New Pvalue><br>Account 8 - Transfer to VM feature code | String      | *       |
| 60892  | <New Pvalue><br>Account 9 - Transfer to VM feature code | String      | *       |

|       |                                                          |        |   |
|-------|----------------------------------------------------------|--------|---|
| 60992 | <New Pvalue><br>Account 10 - Transfer to VM feature code | String | * |
| 61092 | <New Pvalue><br>Account 11 - Transfer to VM feature code | String | * |
| 61192 | <New Pvalue><br>Account 12 - Transfer to VM feature code | String | * |
| 61292 | <New Pvalue><br>Account 13 - Transfer to VM feature code | String | * |
| 61392 | <New Pvalue><br>Account 14 - Transfer to VM feature code | String | * |
| 61492 | <New Pvalue><br>Account 15 - Transfer to VM feature code | String | * |
| 61592 | <New Pvalue><br>Account 16 - Transfer to VM feature code | String | * |

## ENHANCED CALL PARK

- Web Configuration**

This option can be found under device web UI→Phone Settings→ Call Settings.

Call Park Mode ?

Transfer

This option can be found under device web UI→Phone Settings→ Call Settings.

Group Call Park Softkey Feature Code ?

- Functionality**

After setting Call Park Mode to “Transfer”, you can perform call parks while in call using the “CallPark” softkey.

- **Pvalue**

| Pvalue | Description                                          | Value Range                                                    | Default |
|--------|------------------------------------------------------|----------------------------------------------------------------|---------|
| 8612   | <New Pvalue><br>Call Park Mode                       | 0-2<br>Value = 0; FAC<br>Value = 1; XSI<br>Value = 2; Transfer | 0       |
| 22559  | <New Pvalue><br>Group Call Park Softkey Feature Code | String                                                         |         |

### HIDE BT AND WIFI

- **Functionality**

Enabling these pvalues will lockdown access to Bluetooth and/or WiFi-related settings on the device's LCD & WebGUI.

- **Pvalue**

| Pvalue | Description                    | Value Range                                    | Default |
|--------|--------------------------------|------------------------------------------------|---------|
| 22037  | <New Pvalue><br>Hide Bluetooth | 0-1<br>Value = 0; Disable<br>Value = 1; Enable | 0       |
| 22038  | <New Pvalue><br>Hide WiFi      | 0-1<br>Value = 0; Disable<br>Value = 1; Enable | 0       |

### DTMF TONE GAIN

- **Web Configuration**

This option can be found under device web UI→Phone Settings→ Ringtone.

DTMF Tone Gain 

High 

- **Functionality**

Configures the DTMF tone gain to adjust the volume of DTMF tones.

- **Pvalue**

| Pvalue | Description                    | Value Range                                                                     | Default |
|--------|--------------------------------|---------------------------------------------------------------------------------|---------|
| 8722   | <New Pvalue><br>DTMF Tone Gain | 0-3<br>Value = 0; Off<br>Value = 1; Low<br>Value = 2; Medium<br>Value = 3; High | 3       |

## WIFI SSID SETTINGS

- **Functionality**

You can now configure different settings for each SSID via pvalue/alias.

- **Note**

While upgrading to 1.0.13.x, existing Wi-Fi settings will be migrated to the new pvalues automatically. If you downgrade from 1.0.13.x to earlier builds, new changes made on 1.0.13.x won't be carried over and the values that were saved on old pvalues will be applied. For example, if you changed SSID name from A to B and configure the EAP Certificate for SSID 10 on fw 1.0.13.x via pvalue/alias, after you downgrade, the SSID name will be reverted to A and the EAP Certificate will be lost.

- **Pvalue**

Please refer to the configuration templates in the “Wi-Fi Settings” section for the list of pvalues.

## RINGTONE SOFT RESET

- **Web Configuration**

This option can be found under device web UI→Phone Settings→ Ringtone.

Total Number of Custom Ringtone Update ?

- **Functionality**

All other ringtones that are greater than the configured value will be reset. For example, if you configure the value to 3, the device will try to download and keep the downloaded ringtone 1, 2, and 3. Ringtones > 3 such as 4, 5, 6, 7, 8, 9, 10 will all reset to the factory ringtone.

- **Pvalue**

| Pvalue | Description | Value Range | Default |
|--------|-------------|-------------|---------|
|--------|-------------|-------------|---------|

|      |                                                        |     |   |
|------|--------------------------------------------------------|-----|---|
| 8509 | <New Pvalue><br>Total Number of Custom Ringtone Update | 0-9 | 3 |
|------|--------------------------------------------------------|-----|---|

## OPENVPN FAILOVER

- Web Configuration**

This option can be found under device web UI→Network Settings→ OpenVPN® Settings.

OpenVPN® Server Secondary Address ?

OpenVPN® Secondary Port ?

1194

Randomly Select Server ?

☐

- Functionality**

Allows the user to configure a secondary OpenVPN server as a backup incase the primary server is down. If “Randomly Select Server” is enabled, then when a request is made, it will randomly choose from the primary or secondary instead of going to the primary first.

- Pvalue**

| Pvalue | Description                                      | Value Range                                    | Default |
|--------|--------------------------------------------------|------------------------------------------------|---------|
| 22597  | <New Pvalue><br>OpenVPN Server Secondary Address | Server Address                                 |         |
| 22598  | <New Pvalue><br>OpenVPN Server Secondary Port    | 1-65535                                        | 1194    |
| 22599  | <New Pvalue><br>Randomly Select Server           | 0-1<br>Value = 0; Disable<br>Value = 1; Enable | 0       |

## FIRMWARE VERSION 1.0.11.23

### PRODUCT NAME

GRP2610, GRP2610P, GRP2611G, GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2613W, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

10/16/2024

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: f839fbb342bf735697f503ae6b5b909a

### ENHANCEMENT

- Added support for RFC3164 compliant syslogs[SYSLOG HEADER FORMAT]
- Adjusted Static DNS behavior to attempt to retrieve latest result from DNS server before using static value
- Added support for a management interface to allow the splitting of public management data and private voice data on different network interfaces[MANAGEMENT INTERFACE]

### BUG FIX

- Fixed an issue where World model units didn't default to country code DE for Germany
- Fixed a special case where if RTP timestamp jump back occurs then the audio during this interval will be discarded

### NEW FEATURE OVERVIEW

#### SYSLOG HEADER FORMAT

- **Web Configuration**

This option can be found under device web UI→Maintenance→System Diagnostics→Syslog.

Syslog Header Format 

Legacy 

- **Functionality**

Configures the preferred header format for syslogs

- **Pvalue**

| Pvalue | Description                          | Value Range                                                 | Default |
|--------|--------------------------------------|-------------------------------------------------------------|---------|
| 8723   | <New Pvalue><br>Syslog Header Format | 0-1<br>Value = 0; Legacy<br>Value = 1; RFC3164<br>Complaint | 0       |

## MANAGEMENT INTERFACE

- **Web Configuration**

This option can be found under device web UI→Network Settings→Management Interface→ Management Interface.

## Management Interface

Management Interface TR-069

Enable Secondary Network Interface ?

☐

WEB/SSH via ?

ALL Network Interface



SNMP via ?

Primary Network Interface



TR-069 via ?

Primary Network Interface



Syslog via ?

Primary Network Interface



### Secondary Network Interface IPv4 Address

802.1Q/VLAN Tag ?

0

802.1p Priority Value ?

0

IPv4 Address Type ?

Dynamically assigned via DHCP



IPv4 Address ?

Subnet Mask ?

Gateway ?

Save

Save and Apply

Reset

- Functionality**

Configures a secondary network interface that public management data can be routed through

- Pvalue**

| Pvalue | Description                                        | Value Range                            | Default |
|--------|----------------------------------------------------|----------------------------------------|---------|
| 28161  | <New Pvalue><br>Enable Secondary Network Interface | 0-1<br>Value = 0; No<br>Value = 1; Yes | 0       |

|       |                                       |                                                                                                         |   |
|-------|---------------------------------------|---------------------------------------------------------------------------------------------------------|---|
| 28162 | <New Pvalue><br>WEB/SSH via           | 0-1<br><br>Value = 0; ALL<br>Network Interface<br><br>Value = 1; Secondary<br>Network Interface         | 0 |
| 28209 | <New Pvalue><br>SNMP via              | 0-1<br><br>Value = 0; Primary<br>Network Interface<br><br>Value = 1; Secondary<br>Network Interface     | 0 |
| 8607  | <New Pvalue><br>TR-069 via            | 0-1<br><br>Value = 0; Primary<br>Network Interface<br><br>Value = 1; Secondary<br>Network Interface     | 0 |
| 8610  | <New Pvalue><br>Syslog via            | 0-1<br><br>Value = 0; Primary<br>Network Interface<br><br>Value = 1; Secondary<br>Network Interface     | 0 |
| 22111 | <New Pvalue><br>802.1Q/VLAN Tag       | 0-4094                                                                                                  | 0 |
| 22112 | <New Pvalue><br>802.1p Priority Value | 0-7                                                                                                     | 0 |
| 22105 | <New Pvalue><br>IPv4 Address Type     | 0-1<br><br>Value = 0;<br>Dynamically assigned<br>via DHCP<br><br>Value = 1; Statically<br>configured as | 0 |
| 22106 | <New Pvalue><br>IPv4 Address          | IPv4 address                                                                                            |   |
| 22107 | <New Pvalue><br>Subnet Mask           | 256 characters max                                                                                      |   |

|       |                         |              |  |
|-------|-------------------------|--------------|--|
| 22108 | <New Pvalue><br>Gateway | IPv4 address |  |
|-------|-------------------------|--------------|--|

## **FIRMWARE VERSION 1.0.11.18**

### **PRODUCT NAME**

GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### **DATE**

09/04/2024

### **FIRMWARE FILE INFORMATION**

- Firmware file name: grp2610fw.bin  
MD5: f14d0dbbaa92d29298ed08eb88424c7e

### **ENHANCEMENT**

- When performing LDAP search, results will now load dynamically rather than after you press the search softkey
- Added support for P-Served-Queue header from NetSapiens server
- Increased the maximum number of accounts of GRP2614 and GRP2615 to 6 accounts

### **BUG FIX**

- Fixed an issue where the phone couldn't support calls using RTP/AVP + crypto media type
- Fixed an issue where BLF Presence LED/icon was failing to change after receiving the NOTIFY
- Fixed an issue where legacy phones couldn't connect to wp\_master after factory reset
- Fixed an issue on GRP2670 where interacting with remote phonebook via touchscreen would have no response
- Fixed an issue where RTP at the beginning of a call can be delayed if STUN detection is occurring at the same time
- Removed unnecessary voltage warning when using some third-party PSU

## FIRMWARE VERSION 1.0.11.15

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

06/19/2024

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 34de978969f8440d91392082e778b36b

### BUG FIX

- Fixed an issue in rare scenario that a phone may fail to complete upgrade from 1.0.9.x to 1.0.11.11
- Provided a workaround for when factory reset isn't properly resetting the device to default: after SSH, run command "format 3" and answer "y"
- Fixed an issue where INVITE didn't include all of the relevant E911 information
- Fixed an issue where when using the handset, there is a chance for the mic audio to be very small in the beginning of the call
- Fixed an issue where the phone wasn't updating CNAM correctly after performing a BLF pickup
- Fixed an issue where the Outbound Proxy wasn't provisioning properly via alias
- Fixed an issue where under a rare occasion the phone may continue to send RTP/RTCP after a call is ended

## **FIRMWARE VERSION 1.0.11.11 (REPLACED BY 1.0.11.15)**

### **PRODUCT NAME**

GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### **DATE**

06/06/2024

### **FIRMWARE FILE INFORMATION**

- Firmware file name: grp2610fw.bin  
MD5: e50a9a661c6929fcbb90fa488dd9716

### **ENHANCEMENT**

- Improved English Web UI strings

### **BUG FIX**

- Fixed an issue where the default user password was still usable for logging in and now it will require you to change the user password before being able to log in as user
- Fixed an issue where when connected to SSID wp\_master and provisioning via GAPS, after the redirection, the phone will be disconnected from wp\_master before completing the provisioning process
- Fixed an issue where you couldn't provision the phone via URL if the port number was 65XXX and ends with 6-9

### **KNOWN ISSUES**

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

## **FIRMWARE VERSION 1.0.11.10 (REPLACED BY 1.0.11.15)**

### **PRODUCT NAME**

GRP2612, GRP2612P, GRP2612W, GRP2612G, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### **DATE**

05/8/2024

### **FIRMWARE FILE INFORMATION**

- Firmware file name: grp2610fw.bin  
MD5: 70bc846b87d43a50bf3817b2fa51b8cf

### **ENHANCEMENT**

- Added ability to configure a timeout to return to the first page of VPKs[VPK PAGING AUTO RETURN TIMEOUT]
- Increased maximum number of SIP accounts of GRP2612/13 to 4 accounts and GRP2624/34 to 6 accounts (Except on legacy hardware discontinued after 2020)
- Disabled the “User” Web UI account by default
- Platform optimization that improves performance (Except on GRP2612/3/4/5/6 legacy hardware discontinued after 2020)

### **BUG FIX**

- Fixed issue where Display Report on Web UI wasn't displaying all the call records or the correct call information
- Fixed issue where if you are performing an attended transfer in line mode, using the line key to resume the previously held call would instead complete the transfer
- Fixed DST issues with time zones for Helsinki, Athens, Talin, and Tehran
- Fixed issue where you couldn't edit the value field of the Shared VPK
- Fixed issue where softkeys on the LDAP page would be unresponsive in some cases

### **KNOWN ISSUES**

- When using USB headset with GRP2615/2616, if “Always Ring Speaker” is set to “Yes both” on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

### **NEW FEATURE OVERVIEW**

#### **VPK PAGING AUTO RETURN TIMEOUT**

- **Web Configuration**

This option can be found under device web UI→System Settings→Preferences→Display Control→LCD.

VPK Paging Auto Return Timeout ?

- **Functionality**

Configures how long in seconds to wait before switching back to the first VPK page.

- **Pvalue**

| Pvalue | Description                                    | Value Range | Default |
|--------|------------------------------------------------|-------------|---------|
| 8670   | <New Pvalue><br>VPK Paging Auto Return Timeout | 0, 5-90     | 0       |

## FIRMWARE VERSION 1.0.9.141

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

03/29/2024

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 8a0709f57cedde32ed4fbb612c1564ea

### ENHANCEMENT

- Added ability to configure the Alert-Info Remote Ringtone Download Timeout [REMOTE RINGTONE DOWNLOAD TIMEOUT]
- Added visual indicators to reflect changes in presence status [PRESENCE ENHANCEMENT]
- Updated English and Chinese Web UI labels and tooltips

### BUG FIX

- Fixed an issue where LDAPS couldn't use the pre-installed trusted CA list to validate the server's certificate
- Fixed a one-way audio issue that was caused by the phone not updating the new SRTP key properly during the call
- Fixed an issue that the phone didn't accept the tag value of crypto attribute in SDP offer
- Fixed an issue where speed dial via active account was dialing out with the wrong account
- Fixed an issue where the ping tool returns "No Response" when pinging public IP over Ethernet
- Fixed an issue on the handset microphone where if you speak too softly at the beginning of the call, the audio won't be picked up until you speak loudly once
- Fixed wrong RTCP packets data issue

### KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

### NEW FEATURE OVERVIEW

#### REMOTE RINGTONE DOWNLOAD TIMEOUT

- **Web Configuration**

This option can be found under device web UI → Phone Settings → Ringtone.

Alert-info Remote Ringtone Download Timeout [?](#)

1

- **Functionality**

Configures how long in seconds before the phone falls back to using the local ringtone if the alert-info remote ringtone fails to download.

- **Pvalue**

| Pvalue | Description                                                 | Value Range | Default |
|--------|-------------------------------------------------------------|-------------|---------|
| 22554  | <New Pvalue><br>Alert-info Remote Ringtone Download Timeout | 1-5         | 1       |

## PRESENCE ENHANCEMENT

- **Functionality**

Added visual indicators to the monitored keys that reflect the received SIP NOTIFY Event:presence

- 1) <rpidd:endpoint-registered/> : Solid Green
- 2) <rpidd:on-the-phone-ringing/> : Blinking Grteen
- 3) <rpidd:on-the-phone/> : Solid Red
- 4) <rpidd:on-the-phone-held/> : Blinking Red

## FIRMWARE VERSION 1.0.9.136

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

02/05/2024

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 3dfa14438629fe452d75b132508089a1

### ENHANCEMENT

- Added support for authentication on XMP apps[XML APP AUTH]
- Added ability to disable playing the local in-call DTMF tone when using speakers[DTMF TONE WHEN USING SPEAKERS]
- Made improvements to English and Chinese Web UI settings and tooltips strings

### BUG FIX

- Fixed an audio issue when using VPN where it only worked correctly if “Use NAT IP” was configured
- Fixed an issue where VPK/MPK values and descriptions had a string limit of 64 characters instead of 256
- Fixed an issue where the phone can sometimes crash if it gets interrupted while it is receiving early media
- Fixed an issue where the phone occasionally fails to register in certain NAT environments that can’t get an external IP address in a timely manner

### KNOWN ISSUES

- When using USB headset with GRP2615/2616, if “Always Ring Speaker” is set to “Yes both” on the phone’s web UI, you will only hear the ringtone through the headset, not the speaker.

### NEW FEATURE OVERVIEW

#### XML APP AUTH

- **Web Configuration**

This option can be found under device web UI → Application → XML Application.

### XML Application

Server Path 

Username 

Password   

- **Functionality**

Allows the user to configure a username/password when using an XML application.

- **Pvalue**

| Pvalue | Description                                       | Value Range      | Default |
|--------|---------------------------------------------------|------------------|---------|
| 22550  | <New Pvalue><br>XML Application Download Username | 0-128 characters |         |
| 22551  | <New Pvalue><br>XML Application Download Password | 0-128 characters |         |

### DTMF TONE WHEN USING SPEAKERS

- **Web Configuration**

This option can be found under device web UI → Programmable Keys → USB MPK Key

Enable Local In-call DTMF Tone in Speaker Mode  ☒

- **Functionality**

Configures whether to play local DTMF tone during call when using speaker.

- **Pvalue**

| Pvalue | Description                                                    | Value Range                     | Default |
|--------|----------------------------------------------------------------|---------------------------------|---------|
| 22552  | <New Pvalue><br>Enable Local In-call DTMF Tone in Speaker Mode | Value = 0; No<br>Value = 1; Yes | 1       |

## FIRMWARE VERSION 1.0.9.132

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

12/26/2023

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 6d3011470b8bd91f3667d6ff4608d4fa

### ENHANCEMENT

- Supported provisioning alias config template using alias in both uppercase and lowercase letters.
- Improved TFTP firmware upgrade speed
- Added ability to display Serial Number on the Web UI
- Added a new VPK/MPK mode called "Silent Call" which allows you to dial to an extension while the LCD makes no change so you can't tell that a call is made/ongoing on (except legacy hardware)
- Added support for USB MPK keys (except legacy hardware) [USB MPK]
- Added a new VPK/MPK called "HTTP Command" which allows you to send HTTP commands
- Added ability to configure connected GBX20's font size[EXTENSION BOARD FONT SIZE]
- Added ability to configure VQ reports to be sent to the same address used for SIP REGISTER[AUTO VQ COLLECTOR ADDRESS]
- Improved slow performance on lower memory models
- Added ability to automatically record calls locally
- Improved local call recording filename to be more useful
- Added ability to send out star codes to the server while being able to use local call features via LCD
- Added ability to configure static NAPTR/SRV/A records[STATIC DNS RECORDS]
- Improved Hebrew translations
- Added ability to have syslog settings and internal logs be saved after a factory reset[PRESERVE SYSLOG AFTER RESET]
- Changed DNS SRV Fail-over Mode option 3 alias name so that it matches the GRP260x version

### BUG FIX

- Fixed issue where device didn't respect the NTP update interval when DHCP option 42 was used
- Fixed issue where the phone would drop the current call when using a BT headset if the phone receives an incoming call and the incoming call gets cancelled
- Fixed issue where "ForwardAll" softkey wouldn't change to "CancelFWD" after forwarding is enabled if User Protection setting is enabled
- Fixed issue where device would feel slow when no account is registered
- Fixed issue where sometimes you would fail to connect to a router if it was too slow to respond
- Fixed issue where Metaswitch server couldn't recognize DTMF events if the same events were repeated twice
- Fixed issue where the phone had trouble playing 8-bit ringtones properly

- Fixed issue where remotename and remotenumber were not being retrieved properly in CTI command response
- Fixed issue where when both Wi-Fi and Ethernet are being used at the same time, audio may be dropped during a call
- Fixed an issue where registration via TLS could fail due to “Trusted Domain Name List” feature not working correctly
- Fixed an issue where “Enable Busy Tone on Remote Disconnect” was not working correctly
- Fixed an issue on legacy phones, where DTMF sometimes fails to work
- Fixed an issue where the phone couldn’t handle abnormal audio type(UDP/TLS/RTP/SAVPF)
- Fixed an issue with XML app “AppendInputURL” action
- Fixed an issue where the phone could fail to download remote ringtone
- Fixed an issue where if the SIP server or OBP has no port configured, then the default UDP/TCP/TLS port will be used in the SIP request instead of the DNS SRV response’s port
- Fixed an issue where sometimes BLF keys go offline due to subscription loss
- Fixed a typo on one of the “Enable Local Call Features” alias options
- Fixed an issue where the Fiji timezone was one hour ahead of what it should be

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if “Always Ring Speaker” is set to “Yes both” on the phone’s web UI, you will only hear the ringtone through the headset, not the speaker.

## NEW FEATURE OVERVIEW

### USB MPK

- **Web Configuration**

This option can be found under device web UI → Programmable Keys → USB MPK Key.

#### USB MPK Key

| Order | Mode | Account | Value | Label |
|-------|------|---------|-------|-------|
| 1     | None |         |       |       |

- **Functionality**

Allows the user to configure an MPK that triggers when the connected USB device is used.

- **Pvalue**

| Pvalue | Description                        | Value Range                               | Default |
|--------|------------------------------------|-------------------------------------------|---------|
| 8640   | <New Pvalue><br>USB MPK Key – Mode | Value = -1; None<br>Value = 0; Speed Dial | -1      |

|      |                                       |                         |   |
|------|---------------------------------------|-------------------------|---|
|      |                                       | Value = 35; Silent Call |   |
| 8641 | <New Pvalue><br>USB MPK Key – Account | 0-5                     | 0 |
| 8642 | <New Pvalue><br>USB MPK Key – Label   | String                  |   |
| 8643 | <New Pvalue><br>USB MPK Key – Value   | String                  |   |

## EXTENSION BOARD FONT SIZE

- Web Configuration**

This option can be found under device web UI → Programmable Keys → Advanced Settings → EXT Settings

Font Size on Extension Board ?

Normal

- Functionality**

Allows the user to configure the font size of text displayed on the extension board(s).

- Pvalue**

| Pvalue | Description                                  | Value Range                                               | Default |
|--------|----------------------------------------------|-----------------------------------------------------------|---------|
| 8639   | <New Pvalue><br>Font Size on Extension Board | Value = 0; Normal<br>Value = 1; Small<br>Value = 2; Large | 0       |

## AUTO VQ COLLECTOR ADDRESS

- Web Configuration**

This option can be found under device web UI → Accounts → Account\_x → Codec Settings

Collector Address Selection ?

Manual

- **Functionality**

If set to Manual mode, VQ RTCP-XR Collector Name/Address/Port will be used to publish the VQ report. If set to Auto mode, the phone will use the same address as SIP REGISTER to publish the VQ report.

- **Pvalue**

| Pvalue | Description                                             | Value Range                          | Default |
|--------|---------------------------------------------------------|--------------------------------------|---------|
| 60087  | <New Pvalue><br>Account 1 – Collector Address Selection | Value = 0; Manual<br>Value = 1; Auto | 0       |
| 60187  | <New Pvalue><br>Account 2 – Collector Address Selection | Value = 0; Manual<br>Value = 1; Auto | 0       |
| 60287  | <New Pvalue><br>Account 3 – Collector Address Selection | Value = 0; Manual<br>Value = 1; Auto | 0       |
| 60387  | <New Pvalue><br>Account 4 – Collector Address Selection | Value = 0; Manual<br>Value = 1; Auto | 0       |
| 60487  | <New Pvalue><br>Account 5 – Collector Address Selection | Value = 0; Manual<br>Value = 1; Auto | 0       |
| 60587  | <New Pvalue><br>Account 6 – Collector Address Selection | Value = 0; Manual<br>Value = 1; Auto | 0       |

## STATIC DNS RECORDS

- **Web Configuration**

This option can be found under device web UI → Network Settings → Advanced Settings → Static DNS Cache

Advanced Settings
 **Static DNS Cache**

NAPTR
 SRV
 A

Add

|                |                   |           |
|----------------|-------------------|-----------|
| DNS Cache Name | Time Interval (s) | Operation |
|----------------|-------------------|-----------|


 No Data

- **Functionality**

Configures static NATPR/SRV/A records to be used as a backup for when DNS query fails or server is unreachable

- **Pvalue**

| Pvalue                          | Description                                           | Value Range | Default |
|---------------------------------|-------------------------------------------------------|-------------|---------|
| 93000, 93020, 93040, ..., 93340 | <New Pvalue><br>NAPTR DNS Cache Name 1-18             | String      |         |
| 93001, 93021, 93041, ..., 93341 | <New Pvalue><br>NAPTR DNS Cache Time Interval(s) 1-18 | 300-65535   | 300     |
| 93002, 93022, 93042, ..., 93342 | <New Pvalue><br>NAPTR DNS Cache Order 1-18            | 0-65535     | 0       |
| 93003, 93023, 93043, ..., 93343 | <New Pvalue><br>NAPTR DNS Cache Preference 1-18       | 0-65535     | 0       |
| 93007, 93027, 93047, ..., 93347 | <New Pvalue><br>NAPTR DNS Cache Replacement 1-18      | String      |         |
| 93005, 93025, 93045, ..., 93345 | <New Pvalue><br>NAPTR DNS Cache Service 1-18          | String      | SIP+D2U |
| 93008, 93028, 93048, ..., 93348 | <New Pvalue><br>SRV DNS Cache Name 1-18               | String      |         |
| 93009, 93029, 93049, ..., 93349 | <New Pvalue><br>SRV DNS Cache Time Interval(s) 1-18   | 300-65535   | 300     |
| 93010, 93030, 93050, ..., 93350 | <New Pvalue><br>SRV DNS Cache Priority 1-18           | 0-65535     | 0       |
| 93011, 93031, 93051, ..., 93351 | <New Pvalue><br>SRV DNS Cache Weight 1-18             | 0-65535     | 0       |

|                                 |                                                   |           |     |
|---------------------------------|---------------------------------------------------|-----------|-----|
| 93013, 93033, 93053, ..., 93353 | <New Pvalue><br>SRV DNS Cache Target 1-18         | String    |     |
| 93012, 93032, 93052, ..., 93352 | <New Pvalue><br>SRV DNS Cache Port 1-18           | 0-65535   | 0   |
| 93014, 93034, 93054, ..., 93354 | <New Pvalue><br>A DNS Cache Name 1-18             | String    |     |
| 93015, 93035, 93055, ..., 93355 | <New Pvalue><br>A DNS Cache Time Interval(s) 1-18 | 300-65535 | 300 |
| 93016, 93036, 93056, ..., 93356 | <New Pvalue><br>A DNS Cache IP Address 1-18       | String    |     |

## PRESERVE SYSLOG AFTER RESET

- Web Configuration**

Not available, only provisionable by pvalue or alias(maintain.syslog.persist.factoryreset).

- Functionality**

Allows the user to configure their syslog settings and internal logs to be saved across a factory reset.

- Pvalue**

| Pvalue | Description                                 | Value Range                     | Default |
|--------|---------------------------------------------|---------------------------------|---------|
| 82307  | <New Pvalue><br>Preserve Syslog After Reset | Value = 0; No<br>Value = 1; Yes | 0       |

## **FIRMWARE VERSION 1.0.9.103**

### **PRODUCT NAME**

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### **DATE**

08/15/2023

### **FIRMWARE FILE INFORMATION**

- Firmware file name: grp2610fw.bin  
MD5: 1c76b141272c04a16cc5ad8d864a329b

### **BUG FIX**

- Fixed issue where the phone didn't respect the NTP update interval when DHCP option 42 was used

### **KNOWN ISSUES**

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

## FIRMWARE VERSION 1.0.9.99

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

07/13/2023

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 68aa48983b3d06a2fe83c62bf90f904c

### ENHANCEMENT

- Added a prompt that displays when recording file storage is getting close to full
- Added support for including the upgrade method in the firmware/config server path
- Added support for playing remote ringtones via Alert-Info
- Updated Greek translations
- Added support for FTP for downloading phonebook XML
- Added support for a trusted domain name list[TRUSTED DOMAIN NAME LIST]
- Added ability to disable the call recording indicator on LCD when a recording is started by the other party[ENABLE CALL RECORDING LCD INDICATOR]
- Added support for increasing RTP jitter buffer target delay[JITTER BUFFER TARGET DELAY]

### BUG FIX

- Fixed issue where local 802.1Q priority affected the acquisition of VLAN IP and Wi-Fi IP
- Fixed issue when performing call hold or call transfer when using SRTP
- Fixed issue when playing 16-bit stereo custom ringtone
- Fixed abnormal idle line issue when using account swap between a non-SCA account and a SCA account
- Fixed issue where making a new call fails if you receive an incoming call and the call gets cancelled while you are dialing out
- Added missing web tooltips for Multicast IGMP Interval
- Fixed issue where some symbols are ignored when setting a new password after factory reset
- Fixed issue where you couldn't transfer a call to a MPK key set up as BLF
- Fixed issue where switching lines while performing an attended transfer will end the current call
- Removed DST for Mexico timezone
- Fixed issue where newer models were missing the mic1/mic2 options in the Audio Loopback test
- Fixed issue where wrong VPK label is being updated after call forward is enabled
- Fixed issue where phone was auto answering paging during calls without playing a warning tone
- Fixed issue where phone would stop updating BLF status after a long time has passed
- Fixed issue where auto provisioned keys wouldn't transfer from the GBX20 to VPKs after disconnecting the GBX20
- Fixed issue where the ringtone will stop ringing early if you change the ringtone volume while it is playing
- Added missing RTCP-XR parameters in SIP Publish

- Fixed issue where MPK keys configured on the LCD are not synchronized on GDMS
- Fixed issue where wrong alias value was being using when provisioning Israel time zone via UCM or GDMS
- Fixed issue where phone wouldn't ring if you receive an 2<sup>nd</sup> incoming call immediately after the 1<sup>st</sup> incoming call is cancelled
- Fixed issue where Auto Redial feature wasn't working
- Fixed issue where the phone wouldn't accept DHCP option 132 inside DHCP option 43 without DHCP option 133
- Fixed issue where LCD wouldn't popup a authentication window after FTP authentication failed
- Fixed issue where the wrong caller ID was displayed after transferring a call with the BLF key
- Fixed issue where phone would crash if you used the CallReturn VPK when there are no call records
- Fixed issue where the phone would randomly reboot in a network environment where the MTU is greater than 1500
- Fixed issue where active VPK page would display a white box instead of the normal icon
- Fixed issue where Route header was being added even though the OBP mode is set to "Always send to"
- Fixed issue where reboot would fail if you just stopped receiving multicast paging
- Fixed issue where phone would get stuck when trying to do a factory reset while the phone isn't connected to the network
- Fixed issue where the first call will always terminate with a "No Response" message
- Fixed issue where phone would frequently lose registration on Zoom platform
- Fixed issue where phone would perform DNS queries on language.txt during Zoom Zero Touch Provisioning
- Fixed issue where phone doesn't send config file requests to updated config server after GDMS redirection
- Fixed issue where the warning tone for auto answering multicast paging was more quiet than it should have been
- Fixed issue where Voicemail VMPK wasn't changing the name with the label parameter

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

## NEW FEATURE OVERVIEW

### TRUSTED DOMAIN NAME LIST

- **Web Configuration**

This option can be found under device web UI → Accounts → Accounts\_x → Advanced Settings

Trusted Domain Name List 



- **Functionality**

Fill in the list of trusted domain names, which supports filling in the SAN list used only for domain name verification in TLS to obtain certificates. If it matches any item in the trusted domain name list, the certificate is trusted. By default, the remote proxy domain name and SIP server domain name are trusted. This feature supports filling in numbers/letters/-/./\*, supports setting wildcard domain names

such as "\*.grandstream.com", and trust any domains that end with ".grandstream.com".

- **Pvalue**

| Pvalue | Description                                          | Value Range | Default |
|--------|------------------------------------------------------|-------------|---------|
| 60082  | <New Pvalue><br>Account 1 - Trusted Domain Name List | String      | 0       |
| 60182  | <New Pvalue><br>Account 2 - Trusted Domain Name List | String      | 0       |
| 60282  | <New Pvalue><br>Account 3 - Trusted Domain Name List | String      | 0       |
| 60382  | <New Pvalue><br>Account 4 - Trusted Domain Name List | String      | 0       |
| 60482  | <New Pvalue><br>Account 5 - Trusted Domain Name List | String      | 0       |
| 60582  | <New Pvalue><br>Account 6 - Trusted Domain Name List | String      | 0       |

## ENABLE CALL RECORDING LCD INDICATOR

- **Web Configuration**

This option can be found under device web UI → Phone Settings → Call Settings → Call Features

Enable Call Recording LCD Indicator ?



- **Functionality**

Configures whether to show the call recording indicator on LCD for local and remote call recording

- **Pvalue**

| Pvalue | Description | Value Range | Default |
|--------|-------------|-------------|---------|
|--------|-------------|-------------|---------|

|      |                                                     |                                 |   |
|------|-----------------------------------------------------|---------------------------------|---|
| 1697 | <New Pvalue><br>Enable Call Recording LCD Indicator | Value = 0; No<br>Value = 1; Yes | 1 |
|------|-----------------------------------------------------|---------------------------------|---|

## JITTER BUFFER TARGET DELAY

- Web Configuration**

This option can be found under device web UI → Network Settings → Wi-Fi Settings → Advanced Settings

VoWLAN Target Delay  ☒ Low ☐ Medium ☐ High

- Functionality**

Configures the amount of jitter buffer target delay over Wi-Fi. Low is 100ms, Medium is 200ms, and High is 400ms.

- Pvalue**

| Pvalue | Description                         | Value Range                                            | Default |
|--------|-------------------------------------|--------------------------------------------------------|---------|
| 82281  | <New Pvalue><br>VoWLAN Target Delay | Value = 0; Low<br>Value = 1; Medium<br>Value = 2; High | 0       |

## FIRMWARE VERSION 1.0.9.83

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

03/20/2023

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: f4aae79b7d99a1d67d62a46d4cd33c5d

### ENHANCEMENT

- Added ability to configure default input method for Contacts and LDAP[DEFAULT INPUT METHOD]
- Added provision button on top right corner of Web UI
- Improved Chinese translations for energy savings related settings
- Added the ability to connect to the pre-configured default SSID "wp\_master" on Wi-Fi supported models
- Improved Greek LCD strings
- Changed DHCP options 150/160/161 to all be enabled by default[DHCP 150/160/161]
- Added support for EAP-PEAP with Microsoft servers
- "Release DHCP On Reboot" setting changed to "No" by default

### BUG FIX

- Fixed issue where MPK wasn't usable while the screensaver is displayed if "Use Programmable Keys in Screensaver" is set to "LED only"
- Fixed issue where the phone wasn't sending IGMP Join group and Leave group messages
- Fixed issue where seizing a shared line would fail if you made an IP call previously
- Fixed issue where BLF doesn't turn off after the expiration of the "Active Backlight Timeout"
- Fixed issue where GRP2612W could be slow in starting calls
- Fixed issue where BLF LED on GBX20 wasn't blinking correctly when monitoring a parked call
- Fixed issue where the re-registration didn't increment the nonce counter
- Fixed issue where the record icon wouldn't show on the phone when auto record is enabled on the ring group
- Fixed issue where phone wasn't waking up from idle power saving state after receiving a provision request via Web UI
- Fixed issue where phone wouldn't try to connect to primary OBP after registered to the secondary OBP
- Fixed issue where Sync Backlight with LCD was not working properly with the GBX20
- Fixed issue where you couldn't use the arrows keys to select a phonebook sort mode on GRP2670
- Fixed issue where you can still change the ring volume via Preference -> Sounds even with the lock speaker volume setting enabled
- Fixed issue where certain models were missing specific custom softkeys if the hardkey already existed on the phone
- Fixed issue where sometimes the phone would not play incoming RTP

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if “Always Ring Speaker” is set to “Yes both” on the phone’s web UI, you will only hear the ringtone through the headset, not the speaker.

## NEW FEATURE OVERVIEW

### DEFAULT INPUT METHOD

- Web Configuration**

This option can be found under device web UI → System Settings → Input Method

Input Method for Contacts ⓘ

123 ▼

Input Method for LDAP ⓘ

123 ▼

- Functionality**

Configures the default input method for Contacts or LDAP

- Pvalue**

| Pvalue | Description                               | Value Range                                                         | Default |
|--------|-------------------------------------------|---------------------------------------------------------------------|---------|
| 22465  | <New Pvalue><br>Input Method for Contacts | Value = 0;123<br>Value = 1; abc<br>Value = 2; ABC<br>Value = 3; 1Bc | 0       |
| 22466  | <New Pvalue><br>Input Method for LDAP     | Value = 0;123<br>Value = 1; abc<br>Value = 2; ABC<br>Value = 3; 1Bc | 0       |

## DHCP 150/160/161

- Web Configuration**

This option can be found under device web UI → Maintenance → Upgrade and Provisioning → Provision

Enable DHCP Option 150  

Enable DHCP Option 160  

Enable DHCP Option 161  

- **Functionality**

Configures whether to enable DHCP Option 150/160/161

- **Pvalue**

| Pvalue | Description                            | Value Range                     | Default |
|--------|----------------------------------------|---------------------------------|---------|
| 1007   | <New Pvalue><br>Enable DHCP Option 150 | Value = 0; No<br>Value = 1; Yes | 1       |
| 1008   | <New Pvalue><br>Enable DHCP Option 160 | Value = 0; No<br>Value = 1; Yes | 1       |
| 1009   | <New Pvalue><br>Enable DHCP Option 161 | Value = 0; No<br>Value = 1; Yes | 1       |

## FIRMWARE VERSION 1.0.9.74

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

12/21/2022

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: c2700f28a927ba2cd844ec8baf0761df

### ENHANCEMENT

- Added the Energy Saving Feature[ENERGY SAVING]
- Added ability to define input fields in XML applications
- Added ability to reboot and provision to XML applications
- Added ability for voicemail VPK to dial into target's mailbox[MONITORED VOICEMAIL ACCESS NUMBER]
- Added ability to configure X-switch-info SIP header[X-SWITCH-INFO]
- Improved English WebUI strings
- System Information page will now display the VPN IP address
- Added a WebUI option to enable/disable SIP intercom[ENABLE PAGING CALL MODE]
- Improved Japanese LCD strings
- Added a softkey to toggle displaying or hiding the WIFI password when inputting the field
- Added option to set timeout for Public Mode[LOGIN TIMEOUT]
- Added support for Greek LCD strings
- Added ability to configure whether the phone will release DHCP lease on reboot[RELEASE DHCP ON REBOOT]
- Improved Chinese translations
- Added HAC support (except legacy hardware) [HAC]
- Added support for DTMF hard key press to command element

### BUG FIX

- Fixed issue where sometimes the subscription would be refreshed too late
- Fixed issue where the HF line will still flash red after answering a call
- Fixed issue in line mode where if you have 2 established calls and switch to a held call, the line LED will be solid green instead of blinking green
- Fixed issue where audio will switch to speaker instead of disconnecting if you offhook then onhook too quickly when picking up an incoming call
- Fixed issue where dial tone wouldn't be interrupted if inputting numbers while a popup is displayed
- Fixed issue where some LCD settings are not being fully displayed on the smaller-screen models
- Fixed issue where after using account swap, the setting "Maximum Number of SIP Request Retries" wasn't swapped
- Fixed issue where after running a search on your contacts, if you scroll to the next page and then go back to the previous page, it would start at the topmost contact instead of the bottommost contact

- Fixed issue where WPA/EAP identity and password were not mandatory fields when selecting WPA/WPA2 EAP security mode
- Fixed issue where you can click save and apply twice before it gives you the popup that no changes have been made
- Fixed issue where sometimes the backlight wouldn't turn off after setting the idle LCD brightness to 0
- Fixed issue where the web option "Delete All Groups" was missing under Group Management
- Fixed issue where you can't enable keypad locking when public mode is enabled
- Fixed issue where the LDAP search failed popup message is incomplete
- Fixed issue where OpenVPN wasn't working
- Fixed issue where the shared line wouldn't light up on receiving an incoming call after enabling the account
- Fixed issue where a shared line in Account Mode will stop blinking red if you receive 2 calls, answer one of the calls and then end it
- Fixed issue where the call screen is displayed incorrectly when you transfer the call to a non-existent number
- Fixed issue where using an EHS headset to answer incoming call would require extra clicks when Always Ring Speaker is set to "Speaker only"
- Fixed issue where the tooltip info of LCD backlight brightness displayed the wrong range
- Fixed issue where in OpenSER environment, if you set a Music On Hold URI, and put a call on hold, the other user can still hear the GRP
- Fixed issue where the phone would continue playing the default ringtone when using a Plantronics EHS headset, setting EHS Headset Ringtone as Plantronics EHS, and setting the phone's ringtone to something other than the default ringtone
- Fixed issue where wallpaper isn't being applied after provisioning via GDMS
- Fixed weird behavior after swapping a SCA account and a normal account
- Fixed issue where the first call will automatically hang up when connected to Bluetooth and you press the swap softkey
- Fixed issue where sometimes when you delete an office hour, it will delete the wrong one
- Fixed issue where after you establish a BroadSoft network conference, the top of the screen would display UCM
- Fixed issues with BroadSoft R23 redundancy
- Fixed issue with provisioning Custom Idle Screen Softkeys via GDMS
- Fixed issue where the MPKs preview on Web UI was different from the actual MPK display
- Fixed issue where redial would dial the wrong extension after performing a network conference
- Fixed issue where phone would continue downloading contacts even after download contact limit has been reached
- Fixed BroadSoft call log icons on GRP2650
- Fixed issue where the Bluetooth options for different call states for custom call screen softkey were not showing up on Web UI
- Fixed audio issue when performing attended transfer in a SRTP call using OpenSER platform
- Fixed issue where DHCP Option 12 wasn't taking effect
- Fixed issue where Idle Screen softkeys couldn't be provisioned with P-values
- Fixed issue where GRP2615 and GRP2624 were missing the "Disable Active MPK Page" feature
- Fixed issue where you can get 1-way audio if you enable RFC2543 hold and then hold/unhold a call using specific codecs
- Fixed issue where there was a small range of ports that you couldn't configure for multicast listening
- Fixed issue where resetting the Call Screen Softkeys page would reset the More Softkey Display Mode option
- Fixed issue where tone wasn't being played when receiving IM
- Fixed issue where the screen wouldn't wake up after receiving an IM in energy savings mode
- Fixed issue where BLF pickup sound wasn't working
- Fixed issue where the screen wouldn't wake up after receiving a network down prompt in energy savings mode
- Fixed issue where auto answer could behave abnormally after a reboot

- Fixed issue where phones without a USB port would still have the USB option on Web UI for Saved Local Call Recording Location
- Fixed issue where the phone occasionally failed to perform a BS XSI directory request after config provisioning
- Fixed issue where the GUI could crash when the phone uses a USB headset to adjust the volume while on the onhook dialing screen
- Fixed issue where phone would sometimes fail to send out an invite when adding a new participant to a network conference
- Fixed issue where even with user protection enabled, rebooting the phone could cause a user configured setting to be reset
- Fixed issue where if you press the speaker key and offhook at the same time, the offhook doesn't get acknowledged
- Fixed issue where active backlight timeout wasn't being synced with GBX20

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

## NEW FEATURE OVERVIEW

### ENERGY SAVING

- **Web Configuration**

This option can be found under device web UI → System Settings → Energy Saving

|                                                                |                                     |
|----------------------------------------------------------------|-------------------------------------|
| Office Hours ⓘ                                                 | Standard ▼                          |
| Non-Office Hours ⓘ                                             | Customized Energy Saving ▼          |
| Override Backlight Brightness: Active ⓘ                        | 80                                  |
| Override Backlight Brightness: Idle ⓘ                          | 0                                   |
| Override Active Backlight Timeout ⓘ                            | 1                                   |
| Override Blank Screen Timeout ⓘ                                | 1                                   |
| Override Enable Missed Call Backlight ⓘ                        | No, but flash MWI LED ▼             |
| Override Enable IEEE 802.3az EEE (Energy Efficient Ethernet) ⓘ | <input checked="" type="checkbox"/> |

- **Functionality**

Provides users the option to reduce their energy cost if they configure the energy saving feature

- **Pvalue**

| Pvalue | Description                                                                  | Value Range                                                                                    | Default |
|--------|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------|
| 1000   | <New Pvalue><br>Office Hours                                                 | Value = 0; Standard<br>Value = 1; Maximum Energy Saving<br>Value = 2; Customized Energy Saving | 0       |
| 1001   | <New Pvalue><br>Non-Office Hours                                             | Value = 0; Standard<br>Value = 1; Maximum Energy Saving<br>Value = 2; Customized Energy Saving | 0       |
| 1006   | <New Pvalue><br>Override Backlight Brightness: Active                        | 10-100                                                                                         | 80      |
| 1002   | <New Pvalue><br>Override Backlight Brightness: Idle                          | 0-100                                                                                          | 0       |
| 1003   | <New Pvalue><br>Override Active Backlight Timeout                            | 0-90                                                                                           | 1       |
| 1004   | <New Pvalue><br>Override Blank Screen Timeout                                | 0-90                                                                                           | 1       |
| 1005   | <New Pvalue><br>Override Enable Missed Call Backlight                        | Value = 0; Yes<br>Value = 1; No<br>Value = 2; No, but flash MWI LED                            | 1       |
| 8499   | <New Pvalue><br>Override Enable IEEE 802.3az EEE (Energy Efficient Ethernet) | Value = 0; No<br>Value = 1; Yes                                                                | 1       |

## MONITORED VOICEMAIL ACCESS NUMBER

- **Web Configuration**

This option can be found under device web UI →Accounts → Account\_x →General Settings

Monitored Voicemail Access Number 


- **Functionality**

Allows users to access the voice messages of monitored extension. This value is used together with the voicemail programmable keys.

- **Pvalue**

| Pvalue | Description                                                   | Value Range | Default |
|--------|---------------------------------------------------------------|-------------|---------|
| 60076  | <New Pvalue><br>Account 1 – Monitored Voicemail Access Number | String      |         |
| 60176  | <New Pvalue><br>Account 2 – Monitored Voicemail Access Number | String      |         |
| 60276  | <New Pvalue><br>Account 3 – Monitored Voicemail Access Number | String      |         |
| 60376  | <New Pvalue><br>Account 4 – Monitored Voicemail Access Number | String      |         |
| 60476  | <New Pvalue><br>Account 5 – Monitored Voicemail Access Number | String      |         |
| 60576  | <New Pvalue><br>Account 6 – Monitored Voicemail Access Number | String      |         |

### X-SWITCH-INFO

- **Web Configuration**

This option can be found under device web UI →Accounts → Account\_x →SIP Settings

 Use X-switch-info Header 


- **Functionality**

Configures whether the X-switch-info Header is included in the SIP REGISTER request

- **Pvalue**

| Pvalue | Description                                          | Value Range                     | Default |
|--------|------------------------------------------------------|---------------------------------|---------|
| 60070  | <New Pvalue><br>Account 1 – Use X-switch-info Header | Value = 0; No<br>Value = 1; Yes | 0       |
| 60170  | <New Pvalue><br>Account 2 – Use X-switch-info Header | Value = 0; No<br>Value = 1; Yes | 0       |
| 60270  | <New Pvalue><br>Account 3 – Use X-switch-info Header | Value = 0; No<br>Value = 1; Yes | 0       |
| 60370  | <New Pvalue><br>Account 4 – Use X-switch-info Header | Value = 0; No<br>Value = 1; Yes | 0       |
| 60470  | <New Pvalue><br>Account 5 – Use X-switch-info Header | Value = 0; No<br>Value = 1; Yes | 0       |
| 60570  | <New Pvalue><br>Account 6 – Use X-switch-info Header | Value = 0; No<br>Value = 1; Yes | 0       |

## ENABLE PAGING CALL MODE

- **Web Configuration**

This option can be found under device web UI →Phone Settings → Call Settings

Enable Paging Call Mode ?



- **Functionality**

Configures if a user is able to dial out a paging call

- **Pvalue**

| Pvalue | Description | Value Range | Default |
|--------|-------------|-------------|---------|
|--------|-------------|-------------|---------|

|       |                                         |                                 |   |
|-------|-----------------------------------------|---------------------------------|---|
| 22278 | <New Pvalue><br>Enable Paging Call Mode | Value = 0; No<br>Value = 1; Yes | 0 |
|-------|-----------------------------------------|---------------------------------|---|

## LOGIN TIMEOUT

- Web Configuration**

This option can be found under device web UI →Phone Settings → General Settings

Login Timeout 

- Functionality**

Configures the login timeout in minutes in Public Mode

- Pvalue**

| Pvalue | Description                   | Value Range | Default |
|--------|-------------------------------|-------------|---------|
| 2915   | <New Pvalue><br>Login Timeout | 0, 10-1440  | 10      |

## RELEASE DHCP ON REBOOT

- Web Configuration**

This option can be found under device web UI →Network Settings → Advanced Settings

Release DHCP On Reboot  ☒

- Functionality**

Configures whether the phone will release DHCP lease on reboot

- Pvalue**

| Pvalue | Description                            | Value Range                     | Default |
|--------|----------------------------------------|---------------------------------|---------|
| 22380  | <New Pvalue><br>Release DHCP On Reboot | Value = 0; No<br>Value = 1; Yes | 1       |

## HAC

- **Web Configuration**

This option can be found under device web UI → System Settings → Preferences → Audio Control

Enable HAC [?](#) ☐

- **Functionality**

Provides users the option to enable hearing aid compatibility to optimize audio tuning (except legacy hardware).

- **Pvalue**

| Pvalue | Description                | Value Range                     | Default |
|--------|----------------------------|---------------------------------|---------|
| 22485  | <New Pvalue><br>Enable HAC | Value = 0; No<br>Value = 1; Yes | 0       |

## FIRMWARE VERSION 1.0.9.22

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2636, GRP2650, GRP2670

### DATE

07/22/2022

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 7601dc5e7d7b86f69e1780a7b24da49c

### ENHANCEMENT

- Added the ability to customize the SSH port[SSH PORT]
- Modernized the look of the Web UI
- Added the ability to send DTMF while the DUT has call waiting on screen
- Added the ability to view the number of participants in a network conference
- Added the ability to launch the XML application on startup or on receiving an incoming call[XML APP AUTO LAUNCH]
- Added support for GRP2650 and GRP2636

### BUG FIX

- Fixed an issue where the account wouldn't register after a reboot if "Unregister on Reboot" is set to "All" or "Instance"
- Fixed an issue where the ringtone would continue to play through the EHS headset after answering the call
- Fixed an issue where GDMS diagnostics failed to obtain the system state and local network information
- Fixed an issue where there is a delay stabilizing the call when the primary SIP server is down
- Fixed some issues with voice monitoring
- Fixed some incorrect German and Chinese translations
- Fixed an issue where the Wi-Fi scan list would sometimes display a network with weaker signal ahead of a stronger signal network
- Fixed an issue where the call forward icon wouldn't show up on the idle screen if call forwarding is set for any account other than account 1
- Fixed an issue where if you are using a non-default ringtone, when you answer a call, you sometimes hear a short ringtone immediately after answering
- Fixed an issue where it wouldn't display an error prompt when running packet capture with USB even though no USB device is connected
- Fixed an issue where the locale version would be displayed as "Unknown"
- Fixed an issue where DTMF would play through the speakers instead of the handset after the handset is lifted
- Fixed web-based security issues

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if “Always Ring Speaker” is set to “Yes both” on the phone’s web UI, you will only hear the ringtone through the headset, not the speaker.

## NEW FEATURE OVERVIEW

### SSH PORT

- Web Configuration**

This option can be found under device web UI → System Settings → Security Settings → Web/SSH Access

SSH Port 

- Functionality**

Configures the port used for SSH access

- Pvalue**

| Pvalue | Description              | Value Range | Default |
|--------|--------------------------|-------------|---------|
| 27006  | <New Pvalue><br>SSH Port | 22-65535    | 22      |

### XML APP AUTO LAUNCH

- Web Configuration**

This option can be found under device web UI → Application → XML Application

Enable XML Application Auto Launch 

☒ No
 ☐ On Incoming Call
 ☐ On Boot Up
 ☐ When No Account Configured

- Functionality**

Configures whether you want the XML Application to launch automatically based on certain criteria. If set to "On Incoming Call", the phone will launch XML application when there is incoming call. If set to "On Boot Up", it will launch the XML application automatically after boot up. If set to "When No Account Configured", it will only auto-launch the XML application when no account is configured.

- Pvalue**

| Pvalue | Description                                        | Value Range                                                                                                    | Default |
|--------|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------|
| 8533   | <New Pvalue><br>Enable XML Application Auto Launch | Value = 0; No<br>Value = 1; On Incoming Call<br>Value = 2; On Boot Up<br>Value = 3; When No Account Configured | 0       |

## FIRMWARE VERSION 1.0.7.33

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2670

### DATE

06/24/2022

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: d8245ed95c8e1c34d94addb37d429ad2

### ENHANCEMENT

- Added ability to send P-Asserted-Identity header on SIP INVITE instead of P-Preferred-Identity[P-ASSERTED-IDENTITY]
- Added support for RFC6035 reports without RTCPXR PDUs
- Added device certificate upgrade support
- Added LCD/Web UI check for device certificate

### BUG FIX

- Fixed issue where hold URL was called twice when the on-hold button was pressed
- Fixed issue where RFC6035 reports wasn't working with other vendors
- Fixed issue where phone would not ring intermittently
- Fixed issue where you couldn't re-upload a new .ovpn file after uploading the initial .ovpn file under expert mode
- Fixed issue where sslkeylogfile feature wasn't decoding the SIP properly
- Fixed issue where the Maximum Number of SIP Request Retries tooltip in Chinese was wrong
- Fixed issue where phone would fail to dial \*x even though dial plan includes this case
- Fixed issue where BLF label changes to URI after call is parked
- Fixed French translation of "Dismiss" to "Ignorer" to avoid confusion
- Fixed issue where config file download times out when using DHCP option 6 and it falls back to 2<sup>nd</sup> DNS server

### KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

### NEW FEATURE OVERVIEW

#### P-ASSERTED-IDENTITY

- **Web Configuration**

This option can be found under device web UI →Accounts → Account\_x→SIP Settings→Custom SIP Headers.

Use P-Asserted-Identity Header    ☒ No   ☐ Yes

- **Functionality**

Configure whether the "P-Asserted-Identity Header" is present in the SIP INVITE message

- **Pvalue**

| Pvalue | Description                                                | Value Range                     | Default |
|--------|------------------------------------------------------------|---------------------------------|---------|
| 29098  | <New Pvalue><br>Use P-Asserted-Identity Header – Account 1 | Value = 0; No<br>Value = 1; Yes | 0       |
| 29198  | <New Pvalue><br>Use P-Asserted-Identity Header – Account 2 | Value = 0; No<br>Value = 1; Yes | 0       |
| 29298  | <New Pvalue><br>Use P-Asserted-Identity Header – Account 3 | Value = 0; No<br>Value = 1; Yes | 0       |
| 29398  | <New Pvalue><br>Use P-Asserted-Identity Header – Account 4 | Value = 0; No<br>Value = 1; Yes | 0       |
| 29498  | <New Pvalue><br>Use P-Asserted-Identity Header – Account 5 | Value = 0; No<br>Value = 1; Yes | 0       |
| 29598  | <New Pvalue><br>Use P-Asserted-Identity Header – Account 6 | Value = 0; No<br>Value = 1; Yes | 0       |

## FIRMWARE VERSION 1.0.7.25

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2670

### DATE

05/13/2022

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 8de0e44ef4d15598c5f1a679432b9b2e

### ENHANCEMENT

- Added the ability to also enable the speakerphone during a call when using either the handset or headset [GROUP LISTEN]
- Added support for distinctive ringtone based on alert-info string syntax match
- Added the ability to use special characters on the 802.1X MD5 password
- Added ability to configure multicast IGMP query interval [IGMP INTERVAL]
- Added support for uploading .pem trusted CA certificate files
- Added the user-agent field in action URL

### BUG FIX

- Fixed an issue with uploading trusted CA certificates
- Fixed an issue where negotiated RTP events were not honored
- Fixed an issue where you couldn't answer a call using a Plantronics EHS headset with GRP2616
- Fixed issues with RTCP-XR SIP PUBLISH/6035 reports
- Fixed an issue where phone was playing the ringtone inside the dial tone randomly after rejecting calls
- Fixed an issue where if you perform a call pickup on a 3CX server while using SRTP, you will get 1-way audio
- Fixed an issue where the phone will play sound through the speakerphone for about 1 second before the call terminates
- Fixed an issue where dialing DTMF very fast will create 0 duration RTP events
- Fixed an issue where the volume bar wouldn't be displayed when adjusting the volume using a USB headset
- Fixed an issue where the phone would play the busy tone through the speakerphone after hanging up the call using a Plantronics BT headset
- Fixed an issue where GDS stream was displayed too small on GRP2670
- Fixed an issue where the speakerphone would sometimes play the mic sounds from a Plantronics BT headset
- Fixed an issue where BLF dialing wasn't considering the dial plan prefix
- Fixed an issue where sometimes after provisioning via 3CX server, the phone would not fetch the logo or it wouldn't register
- Fixed an issue where the dial tone would sometimes come through the speakerphone instead of the handset after pressing the transfer softkey

- Fixed an issue on GRP2670 where the call park indicator doesn't show busy(red) when there is a call in progress
- Fixed an issue where AirPods V1 weren't able to make or receive calls
- Fixed an issue where the action URL wasn't working when terminating a call via a BT headset

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

## NEW FEATURE OVERVIEW

### GROUP LISTEN

- **Web Configuration**

This option can be found under device web UI →Settings→Preferences->Audio Control

Group Listen with Speaker ☐ No ☒ Yes

- **Functionality**

After enabling the setting, if you are in a call using either the handset/headset, the group listening softkey(SpkOn) will show up and if you click it, it will enable the speakerphone in addition to keeping the handset/headset active.

- **Pvalue**

| Pvalue | Description                               | Value Range                     | Default |
|--------|-------------------------------------------|---------------------------------|---------|
| 22163  | <New Pvalue><br>Group Listen with Speaker | Value = 0; No<br>Value = 1; Yes | 0       |

### IGMP INTERVAL

- **Web Configuration**

This option can be found under device web UI →Settings→Multicast Paging.

Multicast IGMP Interval

120

- **Functionality**

Configures the interval for the phone to send out IGMP membership join request.

- **Pvalue**

| Pvalue | Description                             | Value Range    | Default |
|--------|-----------------------------------------|----------------|---------|
| 22251  | <New Pvalue><br>Multicast IGMP Interval | Value = 30-300 | 120     |

## **FIRMWARE VERSION 1.0.7.23**

### **PRODUCT NAME**

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2670

### **DATE**

04/19/2022

### **FIRMWARE FILE INFORMATION**

- Firmware file name: grp2610fw.bin  
MD5: 309433eedde3bf05b0ce71110f98ac6a

### **BUG FIX**

- Fixed an issue where USB storage would no longer be accessible after a reboot
- Fixed an issue where sometimes when you try scanning for Wi-Fi networks, it will display “Scan Error” and you will have to reboot to fix it

### **KNOWN ISSUES**

- When using USB headset with GRP2615/2616, if “Always Ring Speaker” is set to “Yes both” on the phone’s web UI, you will only hear the ringtone through the headset, not the speaker.

## FIRMWARE VERSION 1.0.7.22

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2670

### DATE

04/05/2022

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 63389925fb864582d1d1b09a4fd96e4b

### ENHANCEMENT

- Added ability to configure custom Call Park/Retrieve Feature Codes [CALL PARK FEATURE CODES]
- Added support for manually importing a single OpenVPN® configuration file [OPENVPN CFG]

### BUG FIX

- Fixed an issue where you couldn't reject an incoming call using GUV3050 BT headset
- Fixed an issue where the BroadSoft Call Park softkey wasn't being displayed in the call connected state
- Fixed an issue where a connected GBX20 wouldn't be able to reconnect properly after factory resetting the GRP phone unless you unplug and replug the GBX20
- Fixed an issue where using a BLF key to retrieve a BroadSoft parked call was not dialing the correct feature code
- Fixed an issue where the PC port would start losing connection after a day of use
- Fixed an issue where LetsEncrypt TLS Certificate was expired

### KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

### NEW FEATURE OVERVIEW

#### CALL PARK FEATURE CODES

- **Web Configuration**

This option can be found under device web UI →Account\_x→SIP Settings→Advanced Features.

Call Park Feature Code

Call Park Retrieve Feature Code

- **Functionality**

This function allows the user to customize the call park/retrieve feature codes used by the call park/retrieve softkeys.

- **Pvalue**

| Pvalue | Description                                                 | Value Range | Default |
|--------|-------------------------------------------------------------|-------------|---------|
| 60069  | <New Pvalue><br>Account 1 - Call Park Feature Code          | String      |         |
| 2336   | <New Pvalue><br>Account 1 - Call Park Retrieve Feature Code | String      |         |
| 60169  | <New Pvalue><br>Account 2 - Call Park Feature Code          | String      |         |
| 2436   | <New Pvalue><br>Account 2 - Call Park Retrieve Feature Code | String      |         |
| 60269  | <New Pvalue><br>Account 3 - Call Park Feature Code          | String      |         |
| 2536   | <New Pvalue><br>Account 3 - Call Park Retrieve Feature Code | String      |         |
| 60369  | <New Pvalue><br>Account 4 - Call Park Feature Code          | String      |         |
| 2636   | <New Pvalue><br>Account 4 - Call Park Retrieve Feature Code | String      |         |
| 60469  | <New Pvalue><br>Account 5 - Call Park Feature Code          | String      |         |
| 2736   | <New Pvalue><br>Account 5 - Call Park Retrieve Feature Code | String      |         |

|       |                                                             |        |  |
|-------|-------------------------------------------------------------|--------|--|
| 60569 | <New Pvalue><br>Account 6 - Call Park Feature Code          | String |  |
| 2836  | <New Pvalue><br>Account 6 - Call Park Retrieve Feature Code | String |  |

## OPENVPN CFG

- Web Configuration**

This option can be found under device web UI →Network→OpenVPN® Settings.

OpenVPN® mode

expert mode ▼

---

Upload OpenVPN® config zip file

Upload

- Functionality**

After switching to “expert mode”, you can manually upload a single OpenVPN client(.ovpn) file.

- Pvalue**

| Pvalue | Description                   | Value Range                                      | Default |
|--------|-------------------------------|--------------------------------------------------|---------|
| 22292  | <New Pvalue><br>OpenVPN® mode | Value = 0; simple mode<br>Value = 1; expert mode | 0       |

## FIRMWARE VERSION 1.0.7.19

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2670

### DATE

03/07/2022

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: d3b8c6cf02b0fbeacd654107ef137ee6

### ENHANCEMENT

- Added "Yerevan" to GMT+04:00 Timezone
- Added option to disable all Local Call Features except Call Forwarding and DND
- Added e911 compliance and HELD protocol support[E911 SERVICE]
- Added support for additional display headers: P-Served-Application and P-Served-User

### BUG FIX

- Fixed issue where using a custom ringtone would cause the phone to eventually stop ringing
- Fixed issue where device wasn't following the NTP update interval when using DHCP option 42
- Updated deprecated SSH cryptographic settings
- Fixed issue where voicemail VMPK wouldn't blink red after receiving a voicemail
- Fixed issue where LDAP Lookup wasn't working for incoming/outbound numbers
- Fixed issue where using the system ringtone would cause the phone to eventually stop ringing
- Fixed issue where the hold URL is called twice when the on-hold button is pressed
- Fixed issue where LCD would sometimes flash after switching from active to idle
- Fixed issue where headset icon wouldn't display for the first incoming call after changing the "Always Ring Speaker" setting
- Fixed issue where the phone wasn't able to make calls using the secondary SIP server if the secondary SIP server doesn't support shared lines but the primary SIP server does
- Fixed issue where SRV request was using TCP even after SIP transport is changed from TCP to UDP
- Fixed issue where if "Network Signaling" was the topmost Contact Source Priority option the other options would still have higher priority
- Fixed issue where a BLF monitored extension created using Auto Provision Eventlists did not display the ID of the extension calling the monitored extension
- Fixed issue where sometimes if you try to answer a call using the handset, it wouldn't get answered
- Fixed issue where incoming calls with SRTP would get dropped after answering
- Fixed issue where phone couldn't initiate multicast paging over WiFi
- Fixed issue where phone would stop sending RTP packets after getting transferred
- Fixed issue where if you set a secondary outbound proxy, the phone only sends DNS request type A even if DNS Mode is set as SRV
- Fixed issue where the phone would sometimes freeze on bootup or when disconnected from network
- Fixed issue where ringing volume will sometimes increase when using Sennheiser SD and DW headsets

- Fixed issue where handset would get staticky, garbled audio after switching from headset to handset when using USB or BT headset

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if “Always Ring Speaker” is set to “Yes both” on the phone’s web UI, you will only hear the ringtone through the headset, not the speaker.

## NEW FEATURE OVERVIEW

### E911 SERVICE

- **Web Configuration**

This option can be found under device web UI →Settings →E911 Service

### E911 Service

|                                    |                                                                   |
|------------------------------------|-------------------------------------------------------------------|
| Enable E911                        | <input checked="" type="radio"/> No <input type="radio"/> Yes     |
| HELD Protocol                      | <input checked="" type="radio"/> HTTP <input type="radio"/> HTTPS |
| HELD Synchronization Interval      | <input type="text" value="0"/>                                    |
| Location Server                    | <input type="text"/>                                              |
| Location Server Username           | <input type="text"/>                                              |
| Location Server Password           | <input type="text"/>                                              |
| Secondary Location Server          | <input type="text"/>                                              |
| Secondary Location Server Username | <input type="text"/>                                              |
| Secondary Location Server Password | <input type="text"/>                                              |
| HELD Location Types                | <input type="button" value="Modify"/>                             |
| HELD Use LLDP Information          | <input checked="" type="radio"/> No <input type="radio"/> Yes     |
| HELD NAI                           | <input checked="" type="radio"/> No <input type="radio"/> Yes     |

- **Functionality**

Allows user to enable enhanced 911 call and configure HELD transfer protocol

- **Pvalue**

| Pvalue | Description                 | Value Range                             | Default |
|--------|-----------------------------|-----------------------------------------|---------|
| 8565   | <New Pvalue><br>Enable E911 | Value = 0; Disable<br>Value = 1; Enable | 0       |

|      |                                                    |                                                |                            |
|------|----------------------------------------------------|------------------------------------------------|----------------------------|
| 8566 | <New Pvalue><br>HELD Protocol                      | Value = 0; HTTP<br>Value = 1; HTTPS            | 0                          |
| 8567 | <New Pvalue><br>HELD Synchronization Interval      | Value = 0; Disable<br>Range: 0, 30-1440 (mins) | 0                          |
| 8568 | <New Pvalue><br>Location Server                    | String                                         |                            |
| 8569 | <New Pvalue><br>Location Server Username           | String                                         |                            |
| 8570 | <New Pvalue><br>Location Server Password           | String                                         |                            |
| 8571 | <New Pvalue><br>Secondary Location Server          | String                                         |                            |
| 8572 | <New Pvalue><br>Secondary Location Server Username | String                                         |                            |
| 8573 | <New Pvalue><br>Secondary Location Server Password | String                                         |                            |
| 8574 | <New Pvalue><br>HELD Location Types                | String                                         | Geodetic,civic,locationURI |
| 8575 | <New Pvalue><br>HELD Use LLDP Information          | Value = 0; No<br>Value = 1; Yes                | 0                          |
| 8576 | <New Pvalue><br>HELD NAI                           | Value = 0; No<br>Value = 1; Yes                | 0                          |
| 8577 | <New Pvalue><br>HELD Identity 1                    | String                                         |                            |
| 8578 | <New Pvalue><br>HELD Identity 1 Value              | String                                         |                            |
| 8579 | <New Pvalue><br>HELD Identity 2                    | String                                         |                            |
| 8580 | <New Pvalue><br>HELD Identity 2 Value              | String                                         |                            |

|      |                                       |        |  |
|------|---------------------------------------|--------|--|
| 8581 | <New Pvalue><br>HELD Identity 3       | String |  |
| 8582 | <New Pvalue><br>HELD Identity 3 Value | String |  |
| 8583 | <New Pvalue><br>HELD Identity 4       | String |  |
| 8584 | <New Pvalue><br>HELD Identity 4 Value | String |  |
| 8585 | <New Pvalue><br>HELD Identity 5       | String |  |
| 8586 | <New Pvalue><br>HELD Identity 5 Value | String |  |
| 8587 | <New Pvalue><br>HELD Identity 6       | String |  |
| 8588 | <New Pvalue><br>HELD Identity 6 Value | String |  |
| 8589 | <New Pvalue><br>HELD Identity 7       | String |  |
| 8590 | <New Pvalue><br>HELD Identity 7 Value | String |  |
| 8591 | <New Pvalue><br>HELD Identity 8       | String |  |
| 8592 | <New Pvalue><br>HELD Identity 8 Value | String |  |
| 8593 | <New Pvalue><br>HELD Identity 9       | String |  |
| 8594 | <New Pvalue><br>HELD Identity 9 Value | String |  |
| 8595 | <New Pvalue><br>HELD Identity 10      | String |  |

|      |                                            |                                 |     |
|------|--------------------------------------------|---------------------------------|-----|
| 8596 | <New Pvalue><br>HELD Identity 10 Value     | String                          |     |
| 8597 | <New Pvalue><br>E911 Emergency Numbers     | String                          | 911 |
| 8598 | <New Pvalue><br>Geolocation-Routing Header | Value = 0; No<br>Value = 1; Yes | 0   |
| 8599 | <New Pvalue><br>Priority Header            | Value = 0; No<br>Value = 1; Yes | 0   |

## FIRMWARE VERSION 1.0.5.93

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634, GRP2670

### DATE

11/30/2021

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 640d4799cc4973778e623d28f9ca61c5

### ENHANCEMENT

- "Blacklist/Whitelist" has been renamed to "Blocklist/Allowlist"
- Added a voicemail notification popup when receiving a new voicemail message or after reboot/reset if there are new(or not played) voicemail messages
- Renamed the Web UI string "Sending provision request to the Phone" to "Starting provisioning..." to avoid confusion
- Added ability to auto answer pre-defined numbers[AUTO ANSWER NUMBERS]
- Added ability to login/logout from all UCM queues in one click[UCM CALL CENTER FAST LOGIN/LOGOUT]
- Added support of the Contact Source Priority Feature[CONTACT SOURCE PRIORITY]
- Added ability to display entire VPK description label by holding the VPK for 3 seconds; it will return to normal after a 5 second wait or if you press the VPK again
- Added ability to end the call on hold without having to resume it first
- Added support for GRP2670

### BUG FIX

- Added additional fixes for the custom ringtone going silent after a few days issue
- Fixed an issue where the phone wouldn't send EAPOL-Logoff when the computer on the PC port is disconnected or turned off
- Fixed an issue where a transferring line would show up in the conference dialing page on OpenSER platform
- Fixed an issue where you could edit remote phonebook entries on the LCD
- Fixed an issue where if you started a conference using the line key, the conference would be displayed incorrectly
- Fixed an issue where the Register Before DNS SRV Failover setting wasn't behaving correctly if the device receives a 503 response
- Fixed an issue where the XML Config File Password would be shown when downloading the device configuration
- Fixed an issue where the ringtone volume wasn't updating if you made changes from the sound page on the LCD
- Fixed an issue where the RTPStatus softkey didn't display in call if you enabled the Custom Softkey Layout setting

- Fixed an issue where a shared line's LED would continue to display as solid green even if you seize the line using another shared line VPK
- Fixed an issue where you couldn't dial a phonebook contact using the dial softkey
- Fixed an issue where the CallPark softkeys weren't being displayed correctly
- Fixed an issue where an incoming call popup would continue to show up after being dismissed if the person calling has been assigned a contact picture
- Fixed an issue where LDAP search would fail using certain filters
- Fixed an issue where a Bluetooth headset would fail to end the call if the call has been put on hold and resumed
- Fixed an issue where LLDP was causing issues with 802.1x authentication
- Fixed an issue where the "More" softkey was shown even though there were no more softkeys
- Fixed an issue where softkeys for replying and deleting would still be displayed after all instant messages were deleted
- Fixed an issue where the REC icon was being displayed in a call even though Recording is disabled
- Fixed an issue where switching from ethernet to Wi-Fi will cause registration and calling issues
- Fixed an issue where the phone would send 2 GET requests when deleting a simultaneous ring entry or BroadWorks Anywhere Location on BroadSoft server
- Fixed an issue where the user could modify the admin password in Basic Settings only mode
- Fixed an issue where the phone was getting multiple IPv6 addresses
- Fixed an issue where the LCD would flicker on screensaver mode
- Fixed an issue where some devices were failing to upgrade
- Fixed an issue where the phonebook download would fail after the first successful download
- Fixed an issue where phone VMPK3 would show the label of VMPK2 when monitoring parking
- Fixed an issue where the mode "Paging" wasn't provisionable as a idle screen softkey
- Fixed an issue where users were able to alter the multicast address when using the paging softkey while Configuration via Keypad Menu is set to Constraint/Basic

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

## NEW FEATURE OVERVIEW

### AUTO ANSWER NUMBERS

- **Web Configuration**

This option can be found under device web UI →Account\_x →Call Settings

Auto Answer Numbers

- **Functionality**

The function allows users to have the phone configured with a pre-defined list of numbers that will perform auto answer.

For "Auto Answer Numbers", it accepts: Digits :1,2,3,4,5,6,7,8,9; x – any digit from 0-9; xx – any two digits from 0-9; [1-5] – any digit from 1 to 5; +: it matches the previous character as many time as needed like regular expression. Please note Auto Answer Numbers can be split with ";", for example: 1x;2xxx;3x+

- **Pvalue**

| Pvalue | Description                                     | Value Range                | Default |
|--------|-------------------------------------------------|----------------------------|---------|
| 29064  | <New Pvalue><br>Auto Answer Numbers – Account 1 | String: Max length is 512. | NULL    |
| 29164  | <New Pvalue><br>Auto Answer Numbers – Account 2 | String: Max length is 512. | NULL    |
| 29264  | <New Pvalue><br>Auto Answer Numbers – Account 3 | String: Max length is 512. | NULL    |
| 29364  | <New Pvalue><br>Auto Answer Numbers – Account 4 | String: Max length is 512. | NULL    |
| 29464  | <New Pvalue><br>Auto Answer Numbers – Account 5 | String: Max length is 512. | NULL    |
| 29564  | <New Pvalue><br>Auto Answer Numbers – Account 6 | String: Max length is 512. | NULL    |

### UCM CALL CENTER FAST LOGIN/LOGOUT

- **Web Configuration**

This option can be found under device web UI →Settings →General Settings

Enable UCM Call Center Fast Login/Logout ☒ Disabled ☐ Enabled

- **Functionality**

This function allow a user to perform the Login/Logout action toward all available call queues with the LoginAll/LogoutAll softkey.

- **Pvalue**

| Pvalue | Description | Value Range | Default |
|--------|-------------|-------------|---------|
|--------|-------------|-------------|---------|

|       |                                                          |                                           |            |
|-------|----------------------------------------------------------|-------------------------------------------|------------|
| 22456 | <New Pvalue><br>Enable UCM Call Center Fast Login/Logout | Value = 0; Disabled<br>Value = 1; Enabled | Value = 0; |
|-------|----------------------------------------------------------|-------------------------------------------|------------|

## CONTACT SOURCE PRIORITY

- Web Configuration**

This option can be found under device web UI →Settings →Call Features

Contact Source Priority

Modify

[Local Phonebook](#), [Remote Phonebook](#), [LDAP](#), [Broadsoft XSI](#), [Network Signaling](#)

- Functionality**

Configures the order of the contact sources for ID lookup in incoming/outgoing calls

- Pvalue**

| Pvalue | Description                             | Value Range                                                       | Default                                                                    |
|--------|-----------------------------------------|-------------------------------------------------------------------|----------------------------------------------------------------------------|
| 22439  | <New Pvalue><br>Contact Source Priority | LocalPhonebook,RemotePhonebook,LDAP,BroadSoftXsi,NetworkSignaling | Value = LocalPhonebook,RemotePhonebook,LDAP,BroadSoftXsi,NetworkSignaling; |

## FIRMWARE VERSION 1.0.5.67

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634

### DATE

11/3/2021

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: c47d4fd1cd1b172aea795fa0914c1066

### ENHANCEMENT

- Added support for special characters in 802.1X identity field
- Added support for playing call waiting tone through the connected headset while option "Ring for Call Waiting" is enabled
- Added support to turn on the LED of VPK/MPK while the screensaver is being displayed on the screen[SCREENSAVER VPK LED]
- Added support to replace duplicate items when downloading a XML phonebook[REPLACE DUPLICATE ITEMS]
- Added support to use RFC3261 instead of RFC6665 for subscription refresh[USE ROUTE SET IN NOTIFY]
- Added support for up to 3 Remote Phonebooks[3 REMOTE PHONEBOOKS]
- Added support for RTCP port negotiation mode[RTCP PORT SELECTION]
- Previous setting "Enable EDRC Feature" has changed to "Headset Noise Shield 2.0"[HEADSET NOISE SHIELD 2.0]
- Added support for Noise Shield for handset[HANDSET NOISE SHIELD 2.0]
- Added option to Show/Hide VPK label on call screen[SHOW KEYS LABEL]
- Added option BroadSoft Contacts Download Limit[BS CONTACTS DOWNLOAD LIMIT]
- Added option Broadsoft Contacts Search Limit[BS CONTACTS SEARCH LIMIT]
- Added support for sending syslogs over IPv6
- Updated Wi-Fi firmware for FragAttacks Wi-Fi Vulnerability
- Updated some Spanish translations
- Updated some German translations
- Added ability to end a held call without resuming it first
- Added support to customize the incoming call screen to show longer VPK labels(press the line key for 3 seconds to show the entire long VPK label; press the line key again or wait 5 seconds and it will timeout)
- Added VPK mode "Paging" as value 33
- Users can no longer edit the multicast address in Constraint Mode
- Added ability to allow users to use the other remaining SIP accounts in public mode [ALLOW MULTIPLE ACCOUNTS]
- Added ability to force a reboot after provisioning if you include the reboot pvalue(22421) set to 1 and the downloaded config file includes any change
- Added support for Ukrainian language input
- Added configurable option to perform factory reset when "Configuration via Keypad Menu" isn't in Unrestricted mode[FACTORY RESET SECURITY LEVEL]
- Added more customization options for idle screen softkeys[CUSTOMIZE IDLE SCREEN SOFTKEY]

## BUG FIX

- Fixed an issue where after provisioning with BroadSoft, the REGISTER request Via header has port number 0
- Fixed an issue where if you remove a headset during a call, it would also end the call
- Fixed an issue where if you set the VLAN tag to 0 and the priority value to non 0, then after you reboot the phone, the phone will display "NETWORK DOWN" all the time
- Fixed an issue where the first LDAP query after reboot will always fail
- Fixed an issue where all MPKs weren't being displayed properly on the Web UI status section
- Fixed an issue where RTCP PUBLISH wasn't being sent correctly on Metaswitch server
- Fixed an issue where there was an abnormally long delay to end a conference call.
- Fixed an issue where the phone wasn't displaying an error message after receiving a 503 Service Unavailable response from BroadWorks
- Fixed an issue where it was harder to notice changes at LCD brightness levels at the lowest settings
- Fixed an issue where the device couldn't modify the country code through cfgmac.xml royalty feature config of GAPS
- Fixed an issue where the phone will sometimes cancel the call after making an outgoing call without pressing any keys
- Fixed an issue where the phone would fail to retrieve back a transferred call on 3CX server
- Fixed an issue where the phone would send out an extra SUBSCRIBE for as-feature-event after provisioning
- Fixed incorrect string formatting for BroadSoft XSI contact details
- Enabled attribute httpOnly by default to prevent executing JS scripts for hijacking attacks
- Fixed an issue where BroadSoft XSI voice mail Number field contained the BroadWorks User ID instead of the number
- Fixed an issue where the BroadSoft IM&P "All" list is cut off on both sides
- Fixed an issue where the Eventlist BLF will disappear after the re-subscription
- Fixed an issue where the phone would experience high values of packet delay
- Fixed an issue where changing a default line to a shared line wouldn't send out a SUBSCRIBE
- Fixed an issue where the ringtone wouldn't be muted after setting the ringtone volume to 0
- Fixed an issue where the predictive dialing list was still displayed after disabling the Predictive Dialing Feature
- Fixed an issue where the Office Hours on the LCD wouldn't synchronize changes made to Office Hours on the Web UI until the phone is rebooted
- Fixed an issue where you couldn't dial a number and then select the SCA line to dial out when in Line Mode
- Fixed an issue where the phone wasn't able to dial out using a BroadSoft call log
- Fixed an issue where the phone would use speakers instead of the handset when answering a call while the handset is offhook
- Fixed an issue where the setting "Bypass Dial Plan" wasn't working with MPKs
- Fixed an issue where USB headsets couldn't trigger the Off-hook Auto Dial feature by pressing their dial key
- Fixed an issue where USB headsets was bypassing the All Keypad Lock mode
- Fixed an issue where the missed call popup would disappear after plugging in USB storage
- Fixed an issue where VMPKs were showing the wrong labels in Account mode
- Fixed an issue where the device would behave abnormal if you press USB headset key in audio loopback mode
- Fixed an issue where the conference call would fail if using the "New Call" softkey to bring in more members
- Fixed an issue where using the line key to answer a call when using the GUV3005 USB headset would fail
- Fixed an issue where pressing the NewCall softkey when using a shared line in Account Mode will cause the device to call itself
- Fixed an issue where the LCD would display the mute icon even after the other party ended the call

- Fixed an issue where the GUV3000/3005 USB headset lights would stay lit even after the device has ended the call
- Fixed an issue where the device didn't synchronize contacts after enabling Remote Synchronization in public mode
- Fixed an issue where phonebook download only works the first time
- Fixed an issue where conference participants list included numbers from dismissed calls
- Fixed an issue where editing and deleting the dial plan on Web UI wasn't working
- Fixed an issue where the LCD doesn't turn on automatically once the office hour is reached
- Fixed an issue where RTCP was not reporting round trip or end system delay correctly
- Fixed an issue where a local conference with mixing audio will show one party as "remote held"
- Fixed an issue where the participant status would be displayed wrong if the call was transferred and then it established a 3-Way Conference using OpenSER server
- Fixed an issue where the shared line will initially play the dial tone after picking a public call off hold
- Fixed an issue where putting a call on a private hold would still display the call as on hold to other devices
- Fixed an issue where the GBX20 backlight wasn't syncing up with the phone's LCD
- Fixed an issue where some Sennheiser USB headsets had issues using the volume up button
- Fixed an issue where the headset key LED wasn't lighting up in Toggle headset/speaker mode
- Fixed an issue where after making a BroadSoft XSI search, it will continue to make the same search each time it performs the interval directory update
- Fixed an issue with Broadsoft XSI where the call logs were being sorted by months before years
- Fixed an issue where the CID wasn't updating after receiving the SIP UPDATE
- Fixed an issue where the device would fail to conference multiple held lines
- Fixed an issue where the GUV3050 wasn't able to reject an incoming call
- Fixed an issue where the device would re-register every time a Call Forward status change is made from the phone
- Fixed an issue where the phone would prevent the user from performing a factory reset on the LCD in Constraint Mode
- Fixed an issue where the contact information is being displayed incorrectly on the MPK LCD
- Fixed an issue where the Grandstream logo was being displayed instead of the Cytracom OEM logo
- Fixed an issue where the device wasn't recording call logs and the LCD and Web UI were displaying that it had no ringtone options
- Fixed an issue where the device was failing to failover back to the primary OBP after the primary OBP has returned online
- Fixed an issue where the device was unable to answer a attended transfer call on the 3CX Web client
- Fixed an issue where the device was unable to answer multiple concurrent incoming calls on the 3CX Web client
- Fixed an issue where you can't make outgoing calls if your Caller ID name is too long and uses a multi-byte encoding language such as Russian
- Fixed an issue where if you have 2 VPKs, one set to Default and one set to Shared, both for the same account, if you seize one line, it'll instead seize both lines at the same time
- Fixed an issue where you provision the device to change its Web Access Mode and register a new account, both in one instance, then the account may not register
- Fixed an issue where the physical MPKs for configured BLF keys will flash on/off every time the device re-registers If the account is configured with primary and secondary SIP servers
- Fixed an issue where the device would stop ringing after a few days if using custom ringtone
- Fixed issue where some of the LCD strings were being displayed in English even though it was set to display Chinese
- Fixed an issue where the SIP T1 Timeout setting was not behaving correctly

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

## NEW FEATURE OVERVIEW

### SCREENSAVER VPK LED

- Web Configuration**

This option can be found under device web UI →Settings →Preferences→LCD Display

Use Programmable Keys in Screensaver ☐ No ☐ LED only ☒ Yes

- Functionality**

Configures whether you can use VPK/MPK while the screensaver is being displayed. You can also configure it so that only the LED will be displayed and that pressing the button will not perform the appropriate action.

- Pvalue**

| Pvalue | Description                                          | Value Range                                            | Default    |
|--------|------------------------------------------------------|--------------------------------------------------------|------------|
| 22363  | <New Pvalue><br>Use Programmable Keys in Screensaver | Value = 0; No<br>Value = 1; LED only<br>Value = 2; Yes | Value = 0; |

### REPLACE DUPLICATE ITEMS

- Web Configuration**

This option can be found under device web UI →Directory →Phonebook Management

Replace Duplicate Items ☒ No  
☐ Replace by Name  
☐ Replace by Number

- Functionality**

Configures whether to replace duplicate items in a downloaded xml phonebook by name or number. If you select Replace by Name, the last and first name both must match. If you select Replace by Number, the number and corresponding type must match.

- Pvalue**

| Pvalue | Description                             | Value Range                                                                 | Default    |
|--------|-----------------------------------------|-----------------------------------------------------------------------------|------------|
| 1436   | <New Pvalue><br>Replace Duplicate Items | Value = 0; No<br>Value = 1; Replace by Name<br>Value = 2; Replace by Number | Value = 0; |

## USE ROUTE SET IN NOTIFY

- Web Configuration**

This option can be found under device web UI →Account\_x →SIP Settings→Basic Settings

Use Route Set In NOTIFY ☐ No ☒ Yes

- Functionality**

Configures whether to use route set in NOTIFY (follow RFC 6665).

- If enabled, the Request URI of the refresh subscription will use the URI in the received NOTIFY Contact (RFC 6665).

- If disabled, the URI in the previously subscribed 200 OK Contact will be used.

- Pvalue**

| Pvalue | Description                                         | Value Range                     | Default    |
|--------|-----------------------------------------------------|---------------------------------|------------|
| 60059  | <New Pvalue><br>Use Route Set in NOTIFY – Account 1 | Value = 0; No<br>Value = 1; Yes | Value = 1; |
| 60159  | <New Pvalue><br>Use Route Set in NOTIFY – Account 2 | Value = 0; No<br>Value = 1; Yes | Value = 1; |
| 60259  | <New Pvalue><br>Use Route Set in NOTIFY – Account 3 | Value = 0; No<br>Value = 1; Yes | Value = 1; |
| 60359  | <New Pvalue><br>Use Route Set in NOTIFY – Account 4 | Value = 0; No<br>Value = 1; Yes | Value = 1; |
| 60459  | <New Pvalue><br>Use Route Set in NOTIFY – Account 5 | Value = 0; No<br>Value = 1; Yes | Value = 1; |

|       |                                                     |                                 |            |
|-------|-----------------------------------------------------|---------------------------------|------------|
| 60559 | <New Pvalue><br>Use Route Set in NOTIFY – Account 6 | Value = 0; No<br>Value = 1; Yes | Value = 1; |
|-------|-----------------------------------------------------|---------------------------------|------------|

### 3 REMOTE PHONEBOOKS

- Web Configuration**

This option can be found under device web UI→Directory→Remote Phonebook

## Remote Phonebook

Phonebook Download Interval

### Remote Phonebook 1

Display Name

HTTP/HTTPS Username

HTTP/HTTPS Password

Phonebook XML Server Path

### Remote Phonebook 2

Display Name

HTTP/HTTPS Username

HTTP/HTTPS Password

Phonebook XML Server Path

### Remote Phonebook 3

Display Name

HTTP/HTTPS Username

HTTP/HTTPS Password

Phonebook XML Server Path

- Functionality**

Allows the user to configure up to 3 XML Phonebook URLs

- Pvalues**

| Pvalue | Description                                             | Value Range         | Default |
|--------|---------------------------------------------------------|---------------------|---------|
| 22427  | <New Pvalue><br>Display Name – Phonebook 1              | 0 to 128 characters |         |
| 22428  | <New Pvalue><br>Phonebook XML Server Path – Phonebook 1 | 0 to 256 characters |         |
| 22429  | <New Pvalue><br>Username – Phonebook 1                  | 0 to 128 characters |         |
| 22430  | <New Pvalue><br>Password – Phonebook 1                  | 0 to 128 characters |         |
| 22431  | <New Pvalue><br>Display Name – Phonebook 2              | 0 to 128 characters |         |
| 22432  | <New Pvalue><br>Phonebook XML Server Path – Phonebook 2 | 0 to 256 characters |         |
| 22433  | <New Pvalue><br>Username – Phonebook 2                  | 0 to 128 characters |         |
| 22434  | <New Pvalue><br>Password – Phonebook 2                  | 0 to 128 characters |         |
| 22435  | <New Pvalue><br>Display Name – Phonebook 3              | 0 to 128 characters |         |
| 22436  | <New Pvalue><br>Phonebook XML Server Path – Phonebook 3 | 0 to 256 characters |         |
| 22437  | <New Pvalue><br>Username – Phonebook 3                  | 0 to 128 characters |         |
| 22438  | <New Pvalue><br>Password – Phonebook 3                  | 0 to 128 characters |         |
| 22426  | <New Pvalue><br>Remote Phonebook Update Interval(m)     | 0, 5-720            | 0       |

## RTCP PORT SELECTION

- Web Configuration**

This option can be found under device web UI →Account\_x →Audio Settings

RTCP Port Selection

Default ▼

- Functionality**

Configures how the RTCP port is selected.

If Default: the next higher (odd) port number following the RTP port.

If Negotiated: use the RTCP port attribute value in SDP exchange.

- **Pvalue**

| Pvalue | Description                                     | Value Range                                 | Default    |
|--------|-------------------------------------------------|---------------------------------------------|------------|
| 60060  | <New Pvalue><br>RTCP Port Selection – Account 1 | Value = 0; Default<br>Value = 1; Negotiated | Value = 0; |
| 60160  | <New Pvalue><br>RTCP Port Selection – Account 2 | Value = 0; Default<br>Value = 1; Negotiated | Value = 0; |
| 60260  | <New Pvalue><br>RTCP Port Selection – Account 3 | Value = 0; Default<br>Value = 1; Negotiated | Value = 0; |
| 60360  | <New Pvalue><br>RTCP Port Selection – Account 4 | Value = 0; Default<br>Value = 1; Negotiated | Value = 0; |
| 60460  | <New Pvalue><br>RTCP Port Selection – Account 5 | Value = 0; Default<br>Value = 1; Negotiated | Value = 0; |
| 60560  | <New Pvalue><br>RTCP Port Selection – Account 6 | Value = 0; Default<br>Value = 1; Negotiated | Value = 0; |

## HEADSET NOISE SHIELD 2.0

- **Web Configuration**

This option can be found under device web UI →Settings →Preferences→Audio Control

Headset Noise Shield 2.0

Medium ▼

- **Functionality**

When enabled, the Noise Shield feature creates a virtual "noise shield" which blocks the outside sounds. When the value is set to "high" power, the shield is created closer to the user which filters more noise. When the value is set to "low" power, the shield is created further from the user which filters less noise.

- **Pvalue**

| Pvalue | Description                              | Value Range                                                                  | Default    |
|--------|------------------------------------------|------------------------------------------------------------------------------|------------|
| 8563   | <New Pvalue><br>Headset Noise Shield 2.0 | Value = 0; Disable<br>Value = 1; Medium<br>Value = 2; High<br>Value = 3; Low | Value = 1; |

## HANDSET NOISE SHIELD 2.0

- Web Configuration**

This option can be found under device web UI →Settings →Preferences→Audio Control

Handset Noise Shield 2.0

High ▼

- Functionality**

When enabled, the Noise Shield feature creates a virtual "noise shield" which blocks the outside sounds. When the value is set to "high" power, the shield is created closer to the user which filters more noise. When the value is set to "low" power, the shield is created further from the user which filters less noise.

- Pvalue**

| Pvalue | Description                              | Value Range                                             | Default    |
|--------|------------------------------------------|---------------------------------------------------------|------------|
| 8538   | <New Pvalue><br>Handset Noise Shield 2.0 | Value = 0; Disable<br>Value = 1; High<br>Value = 2; Low | Value = 1; |

## SHOW KEYS LABEL

- Web Configuration**

This option can be found under device web UI →Settings →Programmable Keys→Virtual Multi-Purpose Keys Settings

Show Keys Label

☒ Show ☐ Hide ☐ Toggle

- Functionality**

When set to "Show", the side labels will be shown during calls.  
 When set to "Hide", side labels will be hidden during calls for more space to display the user information.  
 When set to "Toggle", a softkey will appear so that users can click to Show/Hide the side labels.

- **Pvalue**

| Pvalue | Description                     | Value Range                                             | Default    |
|--------|---------------------------------|---------------------------------------------------------|------------|
| 8386   | <New Pvalue><br>Show Keys Label | Value = 0; Toggle<br>Value = 1; Show<br>Value = 2; Hide | Value = 1; |

## BS CONTACTS DOWNLOAD LIMIT

- **Web Configuration**

This option can be found under device web UI →Settings →BroadSoft→ BroadSoft Xsi

BroadSoft Contacts Download  
Limit

100

- **Functionality**

Configures the maximum number of contacts that can be downloaded for each BroadSoft Xsi server directory. If set to 0, the server's default contact limit will be used. If the total contact records returned by the server is larger than this limit then it will not be downloaded and the device will be limited to remote search.

- **Pvalue**

| Pvalue | Description                                       | Value Range    | Default      |
|--------|---------------------------------------------------|----------------|--------------|
| 8464   | <New Pvalue><br>BroadSoft Contacts Download Limit | Value = 0-2000 | Value = 100; |

## BS CONTACTS SEARCH LIMIT

- **Web Configuration**

This option can be found under device web UI →Settings →BroadSoft→ BroadSoft Xsi

BroadSoft Contacts Search Limit

100

- **Functionality**

Configures the maximum number of remote search records that can be downloaded for the BroadSoft Xsi server directory. If set to 0, there is no limit. If the search result total records exceeds this value, it will not be downloaded, and you will need to narrow the search scope.

- **Pvalue**

| Pvalue | Description                                     | Value Range    | Default      |
|--------|-------------------------------------------------|----------------|--------------|
| 8465   | <New Pvalue><br>BroadSoft Contacts Search Limit | Value = 0-2000 | Value = 100; |

### ALLOW MULTIPLE ACCOUNTS

- **Web Configuration**

This option can be found under device web UI →Settings →General Settings

Allow Multiple Accounts ☒ No ☐ Yes

- **Functionality**

If set to "No", then after the user logs in to the public mode account on LCD, only the public mode account can be used on the phone even though there are other configured SIP accounts. If set to "Yes", then after the user logs in to the public mode account on LCD, other configured SIP accounts on the phone can also be used. Note: This option requires enabling public mode to take effect.

- **Pvalue**

| Pvalue | Description                             | Value Range                     | Default    |
|--------|-----------------------------------------|---------------------------------|------------|
| 8564   | <New Pvalue><br>Allow Multiple Accounts | Value = 0; No<br>Value = 1; Yes | Value = 0; |

### FACTORY RESET SECURITY LEVEL

- **Web Configuration**

This option can be found under device web UI →Maintenance →Security Settings→Security

Factory Reset Security Level  ▼

- **Functionality**

Configure the password inquiry for factory reset. In default, the device ask for password when "Configuration via Keypad Menu" is not unrestricted mode


- **Pvalue**

| Pvalue | Description                                  | Value Range                                                                                 | Default    |
|--------|----------------------------------------------|---------------------------------------------------------------------------------------------|------------|
| 22373  | <New Pvalue><br>Factory Reset Security Level | Value = 0; Default<br>Value = 1; Always Require Password<br>Value = 2; No Password Required | Value = 0; |

## CUSTOMIZE IDLE SCREEN SOFTKEYS

- Web Configuration**

This option can be found under device web UI →Settings →Programmable Keys→Softkey Settings

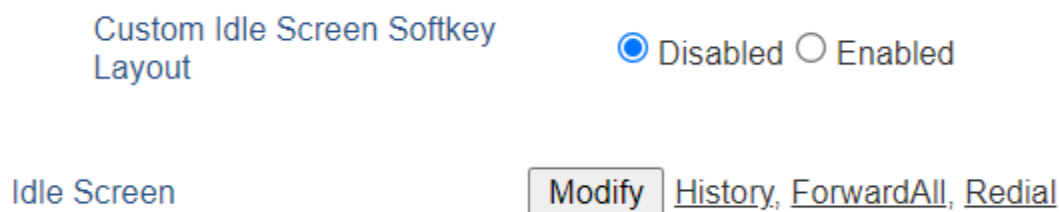

- Functionality**

Allows the user to configure a custom idle screen softkey layout

- Pvalue**

| Pvalue | Description                                       | Value Range                                          | Default                            |
|--------|---------------------------------------------------|------------------------------------------------------|------------------------------------|
| 2939   | <New Pvalue><br>Custom Idle Screen Softkey Layout | Value = 0; Disabled<br>Value = 1; Enabled            | Value = 0;                         |
| 2940   | <New Pvalue><br>Idle Screen                       | Value = History,ForwardAll,Redial,Menu,Contacts,DND; | Value = History,ForwardAll,Redial; |

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if “Always Ring Speaker” is set to “Yes both” on the phone’s web UI, you will only hear the ringtone through the headset, not the speaker.

## **FIRMWARE VERSION 1.0.5.48**

### **PRODUCT NAME**

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616, GRP2624, GRP2634

### **DATE**

4/19/2021

### **FIRMWARE FILE INFORMATION**

- Firmware file name: grp2610fw.bin  
MD5: f7587e4e87c51c9979f92e34b6d78199

### **ENHANCEMENT**

- Added support for port number and IPv6 address for BLF server address
- Added support for Ukrainian language on LCD
- Added support for GRP2624/GRP2634

### **BUG FIX**

- Fixed issue where the phone would freeze randomly when using the Sennheiser DW Office USB headset
- Fixed issue where the phone would send the “#2” code instead of the default code “#72” when using the CallPark softkey
- Fixed issue where INVITE should be sent to the registered secondary server when the primary server is down on NetSapiens
- Fixed issue where when web access is disabled by provisioning, the web UI is still accessible until the phone is rebooted
- Fixed issue where the “Maximum TLS Version” setting set to “Unlimited” wasn’t taking effect
- Fixed issue where the phone would have no audio after making an outgoing call in Handsfree mode
- Fixed issue where call audio will drop every 20 seconds continually(audio clipping) on the Netsapiens Server
- Fixed issue where the phone would always fail to register to the primary server on its first try because it uses the wrong SIP port
- Fixed issue where the phone would randomly crash when using a Plantronics EHS headset
- Fixed issue where the initial REGISTER request after provisioning is always duplicated
- Fixed issue where phone is failing to resolve DNS query for hostname

### **KNOWN ISSUES**

- When using USB headset with GRP2615/2616, if “Always Ring Speaker” is set to “Yes both” on the phone’s web UI, you will only hear the ringtone through the headset, not the speaker.

## **FIRMWARE VERSION 1.0.5.45**

### **PRODUCT NAME**

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616

### **DATE**

03/11/2021

### **FIRMWARE FILE INFORMATION**

- Firmware file name: grp2610fw.bin  
MD5: 0c2dacb920777cd8106d7e4c6d882671

### **BUG FIX**

- Fixed issue where the phone wouldn't automatically re-register after being disconnected from the network for a long time(10+ minutes)
- Fixed issue where downloading a phonebook that contains an entry that has an empty phone number or name field or contains a duplicate contact will result in the entire file being rejected

### **KNOWN ISSUES**

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

## **FIRMWARE VERSION 1.0.5.44**

### **PRODUCT NAME**

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616

### **DATE**

02/03/2021

### **FIRMWARE FILE INFORMATION**

- Firmware file name: grp2610fw.bin  
MD5: 4dc98674a92b3f38d110723ae274e1cf

### **BUG FIX**

- Fixed issue where voice monitoring was not working
- Fixed issue where RTCP was not being sent after being enabled

### **KNOWN ISSUES**

- When using USB headset with GRP2615/2616, if “Always Ring Speaker” is set to “Yes both” on the phone’s web UI, you will only hear the ringtone through the headset, not the speaker.

## FIRMWARE VERSION 1.0.5.36

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616

### DATE

1/8/2021

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 1b77a0f45e7eb51308c76f736b373d07

### ENHANCEMENT

- Added support for a power-saving feature of turning off the LCD display automatically according to a configurable schedule(OFFICE HOUR)
- Added support for a power-saving feature of turning off the LCD display automatically according to a timer when not during office hours(POWER SAVING TIMEOUT)
- Added support for using variables(\$PN and \$MAC) on the configuration server path

### BUG FIX

- Fixed issue where VPK paging softkey is missing if you enabled "Use Custom Softkey Layout"
- Fixed issue where the number of missed calls was not displayed correctly when using the Hebrew language
- Fixed issue where softkeys were missing during a BroadSoft N-Way conference
- Fixed issue where the user would hear a loud tone from the handset occasionally when transferring a call
- Fixed issue where the phone would boot up too fast to factory reset via 1 + 9 keys
- Fixed issue where VPK disappears when enabling Bluetooth Handsfree mode
- Fixed issue where booting messages would be displayed from left to right when using Hebrew to instead use English

### KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

### NEW FEATURE OVERVIEW

#### POWER SAVING TIMEOUT

- **Web Configuration**

This option can be found under device web UI →Settings →Preferences→LCD Display

## Power Saving Timeout

- **Functionality**

Configures how long to wait before it turns off the LCD automatically during non-office hours. The valid range is 0 to 90 minutes, where 0 means disabling the feature.

- **Pvalue**

| Pvalue | Description                          | Value Range     | Default    |
|--------|--------------------------------------|-----------------|------------|
| 22361  | <New Pvalue><br>Power Saving Timeout | Value = 0 to 90 | Value = 0; |

## OFFICE HOUR

- **Web Configuration**

This option can be found under device web UI →Settings →Preferences→Office Hour

## Office Hour

|                                                                                                                       | Start Hour(0-24) | End Hour(0-24)                        |
|-----------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------------|
| Monday                                                                                                                |                  | <input type="button" value="Delete"/> |
| Tuesday                                                                                                               |                  | <input type="button" value="Delete"/> |
| Wednesday                                                                                                             |                  | <input type="button" value="Delete"/> |
| Thursday                                                                                                              |                  | <input type="button" value="Delete"/> |
| Friday                                                                                                                |                  | <input type="button" value="Delete"/> |
| Saturday                                                                                                              |                  | <input type="button" value="Delete"/> |
| Sunday                                                                                                                |                  | <input type="button" value="Delete"/> |
| <input type="button" value="Add"/> <input type="button" value="Save and Apply"/> <input type="button" value="Reset"/> |                  |                                       |

- **Functionality**

Configures how long to wait before it turns off the LCD automatically during non-office hours. The valid range is 0 to 90 minutes, where 0 means disabling the feature.

- **Pvalue**

| Pvalue | Description                  | Value Range                                                                                                                                                     | Default        |
|--------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| 22360  | <New Pvalue><br>Office Hours | Value = string:  <br>separate hours in day<br>of the week and ,<br>separate hours within<br>the day e.g.  9-12,13-<br>17  means 9-12<br>and 13-17 on<br>Tuesday | Value =      ; |

## FIRMWARE VERSION 1.0.5.33

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, GRP2616

### DATE

12/16/2020

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 613b218c6177b1dfcdd068c0e14c283c

### ENHANCEMENT

- Allows use of Primary SIP server URI in REGISTER for both Primary and Secondary SIP servers
- Extended the amount of text that can be displayed on the Extension label.
- Added support for Blacklist/Whitelist IP addresses for web access. [BLACKLIST/WHITELIST WEB ACCESS]
- Added support for disabling the feature of selecting an account from LCD. [SELECT ACCOUNT FROM LCD]
- Added support for choosing between RTCP and RTCP-XR. [ENABLE RTCP]
- Device will now only send one SIP SUBSCRIBE to BLF server while both primary and secondary SIP server is used.
- Added "Disable Active MPK Page" option for GRP2614/2616 when before it only existed for GRP2615.

### BUG FIX

- Fixed issue where using Mute button on GUV3000 would end the call.
- Fixed issue where when using a Jabra EHS headset, if you picked the headset up from the dock, it would not enter the dialing page when on the idle screen and it would not answer an incoming call.
- Fixed issue where when using GUV3005, the first call after you change the codec would have 0-way audio.
- Fixed issue where MAC Header wouldn't always be sent after setting "Use MAC Header" to "Yes to all SIP".
- Fixed issue where the device didn't play the correct ringtone matching incoming caller ID when receiving its second incoming call.
- Fixed issue where phone would crash when using BroadSoft Call Center during a call.
- Fixed issue where error popups on LCD couldn't be closed immediately by switching to dialing screen.
- Fixed issue where BroadSoft Phonebook menu will open up each time the BroadSoft Contact Download starts.
- Fixed issue where BroadSoft Call Log page would display abnormally on GRP2612/13.
- Fixed issue where pressing the "End Call" softkey when using a BT headset would temporarily route the audio to the speaker before ending the call.
- Fixed issue where after enabling public mode, the account's registration isn't refreshed after the SIP Register Expiration.
- Fixed issue where phone wouldn't hear ringtone when receiving a second consecutive call on 3CX.
- Fixed issue where Contact picture wasn't shown clearly in a call.

- Fixed issue where users wouldn't need to enter admin password to rollback firmware when in Constraint Mode.
- Fixed issue where switching from Custom Certificates to All Certificates will cause the account registration to fail.
- Fixed web-based security issues.

## KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

## NEW FEATURE OVERVIEW

### BLACKLIST/WHITELIST WEB ACCESS

- **Web Configuration**

This option can be found under device web UI →Maintenance →Security Settings→Security

Web Access Control
☒ None
☐ Whitelist
☐ Blacklist

Web Access Control List

- **Functionality**

Web Access Control lets you choose if you want to follow a whitelisting or blacklisting scheme for choosing who to allow to access the Web UI. Web Access Control List will list out the IP addresses that you allow or won't allow depending on what you selected on Web Access Control.

- **Pvalue**

| Pvalue | Description                             | Value Range                                                     | Default    |
|--------|-----------------------------------------|-----------------------------------------------------------------|------------|
| 22374  | <New Pvalue><br>Web Access Control      | Value = 0; None<br>Value = 1; Whitelist<br>Value = 2; Blacklist | Value = 0; |
| 22375  | <New Pvalue><br>Web Access Control List | 0 to 512 characters                                             |            |

### SELECT ACCOUNT FROM LCD

- **Web Configuration**

This option can be found under device web UI →Settings →Call Features

Select Account from LCD
☐ Disabled
☒ Enabled

- **Functionality**

Configures whether the user can use the Up/Down key to select an account in the idle screen.

- **Pvalue**

| Pvalue | Description                             | Value Range                               | Default    |
|--------|-----------------------------------------|-------------------------------------------|------------|
| 22381  | <New Pvalue><br>Select Account from LCD | Value = 0; Disabled<br>Value = 1; Enabled | Value = 0; |

### ENABLE RTCP

- **Web Configuration**

This option can be found under device web UI →Accounts →Account\_x →SIP Settings →Advanced Features

☒ Enable RTCP
 ☐ Disable
 ☐ RTCP
 ☒ RTCP-XR

- **Functionality**

Enables user to select to use RTCP, RTCP-XR, or disable the feature.

- **Pvalue**

| Pvalue | Description                            | Value Range                                                  | Default    |
|--------|----------------------------------------|--------------------------------------------------------------|------------|
| 2392   | <New Pvalue><br>Account 1, Enable RTCP | Value = 0; Disabled<br>Value = 1; RTCP<br>Value = 2; RTCP-XR | Value = 2; |
| 2492   | <New Pvalue><br>Account 2, Enable RTCP | Value = 0; Disabled<br>Value = 1; RTCP<br>Value = 2; RTCP-XR | Value = 2; |
| 2592   | <New Pvalue><br>Account 3, Enable RTCP | Value = 0; Disabled<br>Value = 1; RTCP<br>Value = 2; RTCP-XR | Value = 2; |
| 2692   | <New Pvalue><br>Account 4, Enable RTCP | Value = 0; Disabled<br>Value = 1; RTCP<br>Value = 2; RTCP-XR | Value = 2; |

|      |                                        |                                                              |            |
|------|----------------------------------------|--------------------------------------------------------------|------------|
| 2792 | <New Pvalue><br>Account 5, Enable RTCP | Value = 0; Disabled<br>Value = 1; RTCP<br>Value = 2; RTCP-XR | Value = 2; |
| 2892 | <New Pvalue><br>Account 6, Enable RTCP | Value = 0; Disabled<br>Value = 1; RTCP<br>Value = 2; RTCP-XR | Value = 2; |

## FIRMWARE VERSION 1.0.5.15

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, and GRP2616

### DATE

8/14/2020

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 687bd5bff54b2a6a2732f4bd959dcb57

### ENHANCEMENT

- Added GUV300x USB headset support
- Added ability to configure Headset TX/RX gain on LCD.
- Added support for a new config file that can provision using p-values and aliases [DEV.CFG]
- Added option to adjust Call Tone Volume [CALL TONE VOLUME]
- Added Enable EDRC feature, the remote party won't hear the environmental noise during a call. [ENABLE EDRC FEATURE]
- Line status indicator on LCD will now show account name while VPK label on LCD will show VPK description

### BUG FIX

- Fixed issue where GRP2615+GBX20 were not updating the BLF lights properly on the extension board when having more than 1 call.
- Fixed issue where GRP261x was displaying wrong alternative firmware version
- Fixed issue where MPK's would display the key mode name instead of the description
- Fixed issue where Voicemail MPK wouldn't blink when there is an unread voicemail.
- Fixed issue where there is noise in a multicast paging call when you set the Multicast Channel Number to a number that isn't 0.
- Fixed issue where running Ping/Traceroute on the phone LCD wasn't working properly
- Fixed issue where the phone will automatically disconnect/reconnect often when using a Telstra provided router
- Fixed issue where using 256-bit SRTP Key Length on GRP261x does not work with Asterisk 16.5

### KNOWN ISSUES

- When using USB headset with GRP2615/2616, if "Always Ring Speaker" is set to "Yes both" on the phone's web UI, you will only hear the ringtone through the headset, not the speaker.

### NEW FEATURE OVERVIEW

This section lists major new features and describes how to use it from the user's point of view.

## DEV.CFG

- **Functionality**

We now support the new config file “dev[MAC ADDRESS].cfg”. This file allows users to provision using both p-values and aliases. ‘

The new file format is as follows:

```
#
account.2.name=2225
P407=114
#
```

The values need to be placed between lines that begin with a ‘#’ to be able to be provisioned. Lines that start with a ‘#’ have their data ignored and so they can be used as comments.

## CALL TONE VOLUME

- **Web Configuration**

This option can be found under device web UI →Settings →Preferences→Ringtone

Call Tone Volume

- **Functionality**

Call Tone Volume is used to configure the tones level in dB. Values range from -15 to 15.

- **Pvalue**

| Pvalue | Description                      | Value Range | Default    |
|--------|----------------------------------|-------------|------------|
| 22370  | <New Pvalue><br>Call Tone Volume | -15 to 15   | Value = 0; |

## ENABLE EDRC FEATURE

- **Web Configuration**

This option can be found under device web UI →Settings →Preferences→Audio Control

Enable EDRC Feature

☐ No ☒ Yes

- **Functionality**

If this setting is enabled, the remote party won't hear the environmental noise during a call

- **Pvalue**

| Pvalue | Description                         | Value Range                     | Default       |
|--------|-------------------------------------|---------------------------------|---------------|
| 8538   | <New Pvalue><br>Enable EDRC Feature | Value = 0; No<br>Value = 1; Yes | Value = 0; No |

## FIRMWARE VERSION 1.0.3.6

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, and GRP2616

### DATE

1/8/2020

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 950a9398652f599db8af9e590a0e40fa

### ENHANCEMENT

- Added GUI performance improvement
- Added support of exact match lookup method for LDAP search [EXACT MATCH SEARCH]

### BUG FIX

- Fixed an issue with an unresponsive LCD-Features softkey
- Fixed an issue where the LCD wouldn't open the authentication interface after an authentication fail
- Fixed an issue where there is one-way audio if you answer an incoming call while trying to establish a separate conference call
- Fixed an issue where GBX20 was displaying the wrong icons for Eventlist BLF or Presence VPK when provisioned by a GRP261X in HF mode
- Fixed an issue where you couldn't provision a Phonebook VMPK using "phonebook" string on v1 config
- Fixed an issue where you couldn't provision a Phonebook VMPK without a value
- Fixed an issue with firmware upgrading failure
- Fixed an issue where configuring incorrect OpenVPN info caused all SIP accounts to fail to register
- Fixed an issue where updating entries in the phonebook doesn't update in real time
- Fixed an issue where the phone would crash after ending an SRTP call

### NEW FEATURE OVERVIEW

This section lists major new features and describes how to use it from the user's point of view.

#### EXACT MATCH SEARCH

- **Web Configuration**

This option can be found under device web UI →Directory →LDAP.

Exact Match Search

☒ No ☐ Yes

- **Functionality**

With LDAP Lookup: Incoming call and Outgoing call selected, DUT will perform a LDAP search during the incoming and outgoing call. If exact match search is enabled, during the LDAP search, DUT will only get

the result that matches the search input exactly. i.e. if 100 is the incoming/outgoing number only 100 will get searched, \*100\* will not.

- **Pvalue**

| Pvalue | Description                              | Value Range                     | Default       |
|--------|------------------------------------------|---------------------------------|---------------|
| 8505   | <New Pvalue><br>LDAP, Exact Match Search | Value = 0; No<br>Value = 1; Yes | Value = 0; No |

## FIRMWARE VERSION 1.0.1.23

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, and GRP2616

### DATE

12/4/2019

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 7889b5ce581b91cdcc47e26bea2d561c

### ENHANCEMENT

- Improved DNS SRV Failover Design for NetSapiens servers and other server types [REGISTER BEFORE DNS SRV FAIL-OVER]
- Added Phonebook mode to all VPKs and MPKs

### BUG FIX

- Fixed an issue where Hebrew characters wouldn't show up on the MPK LCD screen
- Fixed an issue where JPEG Preview wasn't displaying from GDS3710
- Fixed an issue where Call Park and BLF VPKs weren't lighting up after provisioning

### NEW FEATURE OVERVIEW

This section lists major new features and describes how to use it from the user's point of view.

#### REGISTER BEFORE DNS SRV FAIL-OVER

- Web Configuration**

This option can be found under device web UI →Accounts →Account x →Network Settings

Register Before DNS SRV Fail-over ☒ No ☐ Yes

- Functionality**

Now the users can choose the behavior for registering before DNS SRV Fail-over

- If set to "No", a REGISTER request will not be initiated when a server failover occurred under DNS SRV mode.
- If set to "Yes", a REGISTER request will be initiated when a server failover occurred under DNS SRV mode.

- Pvalue**

| Pvalue | Description | Value Range | Default |
|--------|-------------|-------------|---------|
|--------|-------------|-------------|---------|

|       |                                                              |                                 |               |
|-------|--------------------------------------------------------------|---------------------------------|---------------|
| 29095 | <New Pvalue><br>Account 1, Register Before DNS SRV Fail-over | Value = 0; No<br>Value = 1; Yes | Value = 0; No |
| 29195 | <New Pvalue><br>Account 2, Register Before DNS SRV Fail-over | Value = 0; No<br>Value = 1; Yes | Value = 0; No |
| 29295 | <New Pvalue><br>Account 3, Register Before DNS SRV Fail-over | Value = 0; No<br>Value = 1; Yes | Value = 0; No |
| 29395 | <New Pvalue><br>Account 4, Register Before DNS SRV Fail-over | Value = 0; No<br>Value = 1; Yes | Value = 0; No |
| 29495 | <New Pvalue><br>Account 5, Register Before DNS SRV Fail-over | Value = 0; No<br>Value = 1; Yes | Value = 0; No |
| 29595 | <New Pvalue><br>Account 6, Register Before DNS SRV Fail-over | Value = 0; No<br>Value = 1; Yes | Value = 0; No |

## FIRMWARE VERSION 1.0.1.17

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614, GRP2615, and GRP2616

### DATE

11/6/2019

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: 31f060b5742235491028f197f76791ed

### ENHANCEMENT

- Added the ability to add the MAC address to the User-Agent [ADD MAC IN USER-AGENT]
- Added Support for Chile time zone

### BUG FIX

- Fixed Some timezone values are incorrect
- Fixed Alias name issue for some options in tooltips.
- Fixed Device freezes randomly
- Fixed Device mute icon issue when call is held
- Fixed The line key indicator of shared line key works abnormal when the device holds a call
- Fixed Device misses lock icon when SRTP mode is set to Enabled and Forced
- Fixed Subscribe keeps trying without following the T2 rules when using UDP
- Fixed Device abnormal DND behavior with Metaswitch
- Fixed Call history does not get update on phone's web UI after modifying contact info
- Fixed Saving local call recording to USB works abnormal
- Fixed Calls can't get disconnected when using TLS
- Fixed Softkey turns invalid after onhook dialing times out
- Fixed Device can't be provisioned by zero config with UCM
- Fixed BLF LED turns off when 2<sup>nd</sup> server registration fails

### NEW FEATURE OVERVIEW

This section lists major new features and describes how to use it from the user's point of view.

#### ADD MAC IN USER-AGENT

- **Web Configuration**

This option can be found under device web UI→Accounts→Account x→SIP Settings→Custom SIP Headers.

Add MAC in User-Agent

☒ No ☐ Yes except REGISTER ☐ Yes to all SIP

Save

Save and Apply

Reset

### • Functionality

Now the users can choose the behavior for adding the MAC address in the User-Agent

- If set to “No”, the phone won’t attach the MAC address to the User-Agent header for any outgoing SIP messages.
- If set to “Yes except REGISTER”, the SIP messages for register or unregister will not contain the MAC address in the User-Agent header and all the other outgoing SIP messages will attach the MAC address to the User-Agent header.
- If set to “Yes to all SIP”, all the outgoing SIP messages will attach the MAC address to the User-Agent header.

### • Pvalue

| Pvalue | Description                                      | Value Range                                                                  | Default       |
|--------|--------------------------------------------------|------------------------------------------------------------------------------|---------------|
| P26061 | <New Pvalue><br>Account 1, Add MAC in User-Agent | Value = 0; No<br>Value = 1; Yes except REGISTER<br>Value = 2; Yes to all SIP | Value = 0; No |
| P26161 | <New Pvalue><br>Account 2, Add MAC in User-Agent | Value = 0; No<br>Value = 1; Yes except REGISTER<br>Value = 2; Yes to all SIP | Value = 0; No |
| P26261 | <New Pvalue><br>Account 3, Add MAC in User-Agent | Value = 0; No<br>Value = 1; Yes except REGISTER<br>Value = 2; Yes to all SIP | Value = 0; No |
| P26361 | <New Pvalue><br>Account 4, Add MAC in User-Agent | Value = 0; No<br>Value = 1; Yes except REGISTER<br>Value = 2; Yes to all SIP | Value = 0; No |
| P26461 | <New Pvalue><br>Account 5, Add MAC in User-Agent | Value = 0; No<br>Value = 1; Yes except REGISTER<br>Value = 2; Yes to all SIP | Value = 0; No |
| P26561 | <New Pvalue><br>Account 6, Add MAC in User-Agent | Value = 0; No<br>Value = 1; Yes except REGISTER<br>Value = 2; Yes to all SIP | Value = 0; No |

## **FIRMWARE VERSION 1.0.1.7**

### **PRODUCT NAME**

GRP2612, GRP2612P, GRP2612W, GRP2613, GRP2614 and GRP2615

### **DATE**

09/20/2019

### **FIRMWARE FILE INFORMATION**

- Firmware file name: grp2610fw.bin  
MD5: 854b063762434652190725e7517498d6

### **ENHANCEMENT**

- Improved Feature of blacklist and whitelist in Contact
- Added Support of Bluetooth handsfree feature on GRP2614
- Added support for GRP2615

### **BUG FIX**

- Fixed Eventlist BLF VPK/MPK does not work correctly
- Fixed Device works abnormally if some values are configured with long strings on web UI
- Fixed Default value turns wrong after closing timeout popup warning window
- Fixed VPK configuration with "Default" mode through LCD works abnormal
- Fixed Forwarding popup window doesn't disappear after far end hangs up
- Fixed Device freezes issue during upgrading
- Fixed Device downloads and uploads wallpaper abnormally

## FIRMWARE VERSION 1.0.0.31

### PRODUCT NAME

GRP2612, GRP2612P, GRP2612W, GRP2613, and GRP2614

### DATE

05/17/2019

### FIRMWARE FILE INFORMATION

- Firmware file name: grp2610fw.bin  
MD5: c4e620081714a9387e439e4a46539ce4

### ENHANCEMENT

- Added support to accept P parameter's value in string format instead of number for MPK/VPK mode configuration in xml config file. The string for the mode is case-insensitive.

For example:

**<P1367>0</P1367>** can be replaced by **<P1367>Line</P1367>** or **<P1367>line</P1367>**.

This will configure VPK 3 as "Line" mode.

Here is the full list for the mode options:

"none"  
"line"  
"sharedline"  
"speeddial"  
"blf"  
"presencewatcher"  
"eventlistblf"  
"speeddialaa"  
"dialdtmf"  
"voicemail"  
"callreturn"  
"transfer"  
"callpark"  
"intercom"  
"ldapsearch"  
"conference"  
"multicastpaging"  
"record"  
"calllog"  
"monitoredcp"  
"moniteredcp" // backward compatible version  
"menu"  
"xmlapp"  
"information"  
"message"  
"forward"

"dnd"  
"redial"  
"instantmessage"  
"multicastlistenaddress"  
"keypadlock"  
"gdsopendoor"  
"presenceeventlist"  
"provision"

## BUG FIX

- Fixed compatibility issues with GDMS
- Fixed call recording file abnormal issue
- Fixed issues related to display and options on web UI
- Fixed UI related issues
- Fixed WiFi related issues
- Fixed device does not continue to play ringtone after end of the call
- Fixed MPK/VPK related issues
- Fixed no sort softkey in searched result list of local phone book
- Fixed device does not display instant messages properly
- Fixed phone book entries in All tag displays incompletely
- Fixed the number and recording icon overlap in call history
- Fixed issues when using with Broadsoft platform
- Fixed new message entries show wrong number
- Fixed device cannot adjust volume after connecting Bluetooth
- Fixed dialing icon displays incorrectly after switching pages
- Fixed phone fails to redial in call failure page
- Fixed IPv6 related issues

## APPENDIX A: PREVIOUS UPGRADING NOTES

- After upgrading to 1.0.15.x, to downgrade back to 1.0.13.x and lower, you'll need to first downgrade to a separate transition firmware. This transition firmware will be released at a later date.
- For GRP2650 hardware 5.0B+, once upgraded to 1.0.13.27, downgrading to lower firmware versions is not allowed.
- For GRP2650 hardware 5.0A+ and 1.1B+, once upgraded to 1.0.13.23, downgrading to lower firmware versions is not allowed.
- Firmware 1.0.11.23 is the first public firmware for GRP2610, GRP2610P, GRP2611G and GRP2613W. Please do not attempt downgrading to previous firmware such as 1.0.11.18 which is for GRP2612/2612P/2612W/2613/2614/2615/2616/2624/2634/2636/2650/2670 only.
- For GRP261x hardware v5.0+, once upgraded to 1.0.11.15, downgrading to lower firmware versions is not allowed.
- Firmware 1.0.9.22 is the first public firmware for GRP2650 and GRP2636. Please do not attempt downgrading GRP2650 or GRP2636 to previous firmware such as 1.0.7.33 which is for GRP2612/2612P/2612W/2613/2614/2615/2616/2624/2634/2670 only.
- After upgrading to new certificate ECDSA+SHA384, you can no longer revert to the old certificate RSA+SHA256, and you can no longer downgrade to any firmware below 1.0.7.33.
- For GRP2612/2613/2614/2615/2616 hardware v1.x devices(legacy), if the firmware is older than 1.0.5.93, please upgrade to 1.0.5.93 before upgrading to 1.0.7.x. Here is the firmware downloading path for 1.0.5.93:  
[http://firmware.grandstream.com/Release\\_GRP261x\\_1.0.5.93.zip](http://firmware.grandstream.com/Release_GRP261x_1.0.5.93.zip)  
It's suggested to use HTTP/TFTP to upgrade device to 1.0.5.93, here is the HTTP upgrading path:  
[firmware.grandstream.com/grp261x/1\\_0\\_5\\_93](http://firmware.grandstream.com/grp261x/1_0_5_93)
- For GRP261x hardware v2.3+, once upgraded to 1.0.5.103, downgrading to lower firmware versions is not allowed.
- Firmware 1.0.5.93 is the first public firmware for GRP2670. Please do not attempt downgrading GRP2670 to previous firmware such as 1.0.5.67 which is for GRP2612/2612P/2612W/2613/2614/2615/2616/2624/2634 only.
- For GRP261x hardware v2.1e, once upgraded to 1.0.5.61, downgrading to lower firmware versions is not allowed.
- Firmware 1.0.5.48 is the first public firmware for GRP2624/2634. Please do not attempt downgrading GRP2624/34 to previous firmware such as 1.0.5.45 which is for GRP2612/2612P/2612W/2613/2614/2615/2616 only.
- For GRP2614/2615/2616 hardware v2.1+, once upgraded to 1.0.5.33, downgrading to firmware 1.0.5.15 or lower version is not allowed.
- Starting from 1.0.5.15, GRP2612/2613 will not support displaying GDS video feed anymore due to memory limitations.
- For GRP2612/2613 hardware v2.1+, once upgraded to 1.0.5.15, downgrading to firmware 1.0.3.x or lower version is not allowed.
- If GRP2612/2612P/2612W/2613/2614 is upgraded from a version lower than 1.0.0.31 to 1.0.0.31+, the VPK/MPK keys' settings need to be reconfigured due to significant internal value changes.
- Firmware 1.0.1.17 is the first public firmware for GRP2616. Please do not attempt downgrading GRP2616 to previous firmware such as 1.0.1.7 which is for GRP2612/2612P/2612W/2613/2614/2615 only.
- Firmware 1.0.1.7 is the first public firmware for GRP2615. Please do not attempt downgrading GRP2615 to previous firmware such as 1.0.0.31 which is for GRP2612/2612P/2612W/2613/2614 only.
- GRP261X does not support weather service.